



# Product Selection Catalogue



Globally Proven Construction Solutions

Snap for more information.

CONTENT	PAGE
<b>SUPERCAP® system &amp; concrete solutions</b> .....	4
System warranties.....	5
Swimming pool system warranties .....	6
“Extra Heavy Duty” Streetscape Installations .....	7
Facade system warranties.....	8
Committed to sustainability.....	9
Technical training and seminars.....	10
Customer support.....	11
Installation systems.....	12
<b>LATEX ADMIX</b>	
4237 Latex Additive .....	14
4237 Rapid Latex Additive.....	14
3701 Mortar Admix.....	14
LATABOND™.....	15
101 Rapid Latex Admix.....	15
<b>MORTAR POWDER</b>	
226 Thick Bed Mortar .....	17
211.....	17
3701 Fortified Mortar Bed.....	17
<b>SELF-LEVELLING AND PRIMER</b>	
LEVEL.....	20
PRIMER.....	20
PRIME-N-BOND™.....	20
<b>UNDERLAYMENT</b>	
STRATA_MAT™.....	22
<b>SOUND CONTROL</b>	
125 TRI MAX®.....	24
LATICRETE SOUND CONTROL UNDERLAYMENT .....	24
<b>VAPOUR BARRIER</b>	
LATAPOXY® MOISTURE SHIELD.....	25
HYDRO BAN® SLURRY .....	25
<b>WATERPROOFING MEMBRANE</b>	
HYDRO BAN®.....	27
HYDRO BAN® Fillet & Sealant.....	27
<b>LIGHTWEIGHT &amp; SAND-FREE THINSET ADHESIVE</b>	
257 TITANIUM™.....	28
335 LITE.....	28
<b>ADHESIVE</b>	
254 Adhesive.....	29
335 Adhesive.....	29
335 RAPID Adhesive.....	29
ULTRA X8 Adhesive.....	30
LATAFLEX Gold Adhesive .....	30
Multiflex Adhesive.....	31
315 Adhesive.....	31
Multimastic Premium Adhesive .....	31
<b>SPECIALISED ADHESIVE</b>	
125 TRI MAX™.....	34
MVIS™ VENEER MORTAR.....	34
LATAPOXY® 300 Adhesive.....	35
LATAPOXY® 310 Stone Adhesive .....	35

	PAGE
<b>GROUTING</b>	
Grout Purchasing Information .....	37
SPECTRALOCK® 2000IG.....	37
LATAPOXY® SP100 Grout .....	37
SPECTRALOCK® PRO Premium Grout*.....	38
SPECTRALOCK® Grout (Part C) Powders .....	38
SPECTRALOCK® Grout DAZZLE™ (Part D) Component .....	39
PERMACOLOR® Grout <sup>^</sup> .....	39
PERMACOLOR® NS Grout .....	39
PERMACOLOR® SELECT .....	40
<b>COMMERCIAL GROUTING</b>	
LATAPOXY® SP-100 · Liquid Only .....	41
SPECTRALOCK® 2000 IG · Liquid Only .....	41
<b>SEALANTS</b>	
HYDRO BAN® Fillet & Sealant .....	43
LATASIL™ .....	43
<b>GROUT COVERAGE CHART</b>	<b>45</b>
<b>GROUT COLOUR CHARTS</b>	
PERMACOLOR® SELECT GROUT COLOUR CHART.....	46
PERMACOLOR® GROUT COLOUR CHART .....	47
PERMACOLOR® NS GROUT COLOUR CHART.....	48
EPOXY GROUT AND SEALANT COLOUR CHART.....	49
<b>CONCRETE CARE</b>	
SEAL HARD.....	50
<b>STONETECH® - PROTECT RANGE</b>	
STONETECH® BULLETPROOF® SEALER.....	52
STONETECH® HEAVY DUTY SEALER.....	52
STONETECH® Stone, Tile and Grout SEALER.....	53
STONETECH® IMPREGNATOR PRO® SEALER.....	53
STONETECH® SALT WATER-RESISTANT SEALER.....	53
STONETECH® HEAVY DUTY EXTERIOR SEALER.....	54
STONETECH® HEAVY DUTY GROUT SEALER.....	54
STONETECH® GROUT RELEASE .....	54
<b>CLEANERS</b>	
STONETECH® Epoxy Grout Haze and Coating Stripper .....	56
STONETECH® REVITALIZER® CLEANER and PROTECTOR.....	56
STONETECH® STONE and TILE CLEANER.....	57
STONETECH® MOLD AND MILDEW STAIN REMOVER.....	57
STONETECH® SOAP SCUM REMOVER.....	57
STONETECH® KLENZALL™ CLEANER.....	58
STONETECH® OIL STAIN REMOVER.....	58
<b>STONETECH® - TRANSFORM RANGE</b>	
STONETECH® ENHANCER PRO™ SEALER.....	59
STONETECH® HONING POWDER .....	59
<b>PRODUCT SELECTION CHART</b>	<b>60-61</b>
<b>SPECIAL ORDER ITEMS:</b> Products shipped in full cartons only. Special orders may require four to eight weeks notice. Please call first to check availability. A written purchase order must be received from the customer to cover the special order and a deposit may be required. Special orders cannot be cancelled or returned. Please consult your LATICRETE Technical Sales Representative for ordering information on Special Order products. Units per pallet will be advised upon ordering (TBA). Prices for special order items are on application (POA).	

Consult our website at [www.laticrete.com.au](http://www.laticrete.com.au) for the most current versions of product data sheets, warranties, and SDS sheets. Content of this brochure is for informational purposes only. Refer to individual product data sheets and warranties for complete information.

<sup>^</sup>United States Patent No.: 6,784,229 B2 (and other Patents).

\*United States Patent No.: 6,881,768 (and other Patents).

LATICRETE is a family-owned, customer focused, world-wide manufacturer of green flooring and facade materials, used in residential, commercial and industrial applications. For over 65+ years, LATICRETE has provided the technology, products and service making innovative, permanent installations and repairs for the construction market. Architecturally specified and professionally endorsed, LATICRETE offers a dedication to quality that results in globally proven solutions for virtually every flooring, waterproofing and facade application.

## TILE AND STONE INSTALLATION AND CARE SYSTEMS

Ensure a successful installation each and every time with the most comprehensive assortment of innovative tile and stone installation materials available worldwide. LATICRETE® industry-leading products provide complete system solutions from the substrate up through the grout for virtually any type of tile or stone installation in commercial, industrial, and residential applications.

Product categories include surface preparation, waterproofing, sound control, anti-fracture, adhesives, grouts, sealers and cleaners that are all designed to work together providing a comprehensive installation.

## MASONRY VENEER INSTALLATION SYSTEMS

Keep up with the increasing popularity of adhered masonry veneers. Trust your installations to a complete productivity-boosting system designed to deliver superior, long-term performance on masonry veneer projects of all types including residential, commercial, and industrial applications.

Unlike traditional methods and materials, the Masonry Veneer Installation System (MVIS™) is engineered to provide a permanent, high-strength installation that uses a revolutionary barrier against air and water penetration into the structure. The MVIS is designed for thin-brick, manufactured stone and natural stone veneers for interior and exterior applications. Complementary products include cleaners and sealers for natural and manufactured veneers.

## SURFACE PREPARATION

A quality finished floor starts with a properly prepared surface—one that guarantees a long-lasting, durable installation. LATICRETE time-tested surface preparation products are formulated to preserve quality by protecting installations from water vapour transmission, sound transmission, and cracks. They provide a perfectly level substrate to accommodate a variety of floor finishes including vinyl, wood, carpet, and tile.

Our innovative products are engineered to ensure substrates will easily accept finishes with minimal time and maximum cost-effectiveness, no matter how challenging your subflooring project may be.





## LATICRETE® SUPERCAP® SYSTEM

### Now available in Australia!

The LATICRETE® SUPERCAP® System is a time-saving, cost-effective method for finishing new concrete or capping existing slabs by combining a LEED contributing, GREENGUARD certified, low-alkali, self-levelling, cement-based technology with a computer-controlled mobile blending unit (pump truck).

Our patented Mobile Blending Unit blends the SLU at street level and pumps it more than 60 stories high at a rate of 13.5 ton per hour, this revolutionary system benefits the entire project by providing predictable results that save time and money, and improve overall quality.

## CONCRETE CONSTRUCTION CHEMICALS

Improve the long-term durability, performance, and appearance of concrete surfaces with our complete line of protection and repair solutions. Curing and sealing treatments, floor hardeners and densifiers, polished concrete systems, and stain protection products that work together to ensure your concrete floor is safe, resilient, and easy to maintain.

## INDUSTRY-LEADING TRAINING AND SUPPORT

LATICRETE® low-VOC products are independently certified. Our products help you contribute toward LEED certification.

### Training and Education

LATICRETE will hold continuing education seminars right from your office. You can also attend product and installation technology seminars at one of our training centres or a location of your choice.



# OFFERING THE BEST WARRANTIES IN THE INDUSTRY



With a LATICRETE® System Warranty you can enjoy peace of mind with high-quality, world renowned LATICRETE products. When selecting the installation system for your project, consider the value and peace of mind that a LATICRETE warranty can bring. LATICRETE provides comprehensive warranties covering commercial, residential, and industrial projects around the world. However, our best guarantee is over 65 years of experience with industrial, commercial and residential installations in every imaginable climate. LATICRETE Australia warrants that LATICRETE products will be free from manufacturing defects and will not break down or deteriorate when installed in accordance with LATICRETE written specification and guidelines. Our warranty for a defect or failure of a system under this system warranty is limited to the cost of replacing the specific portion of the system that has been proven to be defective, including the cost of the system, finishing materials and labour. Proof of purchase will be required. Warranties are not transferable or assignable. This warranty does not cover any defects caused by an accident, misuse, abuse, improper installation, lack of reasonable care, unauthorised modification, tampering or attempt to repair by a person not authorised by the original applicator; or any product that has been used for a purpose, other than its intended use. For these limited warranties to apply, the applications that comprise the installation must be performed with the products listed in the particular document for each application (refer to the charts below).

For consumers as defined by the Australian Consumer Law (ACL), the benefits conferred by this warranty are in addition to all rights and remedies in respect of the product that the consumer has under the Competition and Consumer Act 2010 and similar state and territory laws. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

LATICRETE 15 Year System Warranty		LATICRETE 25 Year System Warranty		LATICRETE Lifetime Interior Residential System Warranty	
APPLICATION	PRODUCTS	APPLICATION	PRODUCTS	APPLICATION	PRODUCTS
Underlayment	<ul style="list-style-type: none"> <li>LEVEL</li> <li>PRIMER</li> </ul>	Underlayment	<ul style="list-style-type: none"> <li>LEVEL</li> <li>PRIMER</li> </ul>	Underlayment	<ul style="list-style-type: none"> <li>LEVEL</li> <li>PRIMER</li> </ul>
Primer	<ul style="list-style-type: none"> <li>PRIME-N-BOND™</li> </ul>	Primer	<ul style="list-style-type: none"> <li>PRIME-N-BOND</li> </ul>	Primer	<ul style="list-style-type: none"> <li>PRIME-N-BOND</li> </ul>
Moisture Shield	<ul style="list-style-type: none"> <li>LATAPOXY® Moisture Shield</li> <li>HYDRO BAN® SLURRY</li> </ul>	Moisture Shield	<ul style="list-style-type: none"> <li>LATAPOXY Moisture Shield</li> <li>HYDRO BAN SLURRY</li> </ul>	Moisture Shield	<ul style="list-style-type: none"> <li>LATAPOXY Moisture Shield</li> <li>HYDRO BAN SLURRY</li> </ul>
Waterproofing/ Anti-Fracture	<ul style="list-style-type: none"> <li>HYDRO BAN Waterproof Membrane</li> <li>HYDRO BAN Fillet &amp; Sealant</li> </ul>	Waterproofing/ Anti-Fracture	<ul style="list-style-type: none"> <li>HYDRO BAN Waterproof Membrane</li> <li>HYDRO BAN Fillet &amp; Sealant</li> </ul>	Waterproofing/ Anti-Fracture	<ul style="list-style-type: none"> <li>HYDRO BAN Waterproof Membrane</li> <li>HYDRO BAN Fillet &amp; Sealant</li> </ul>
Sound Control/ Anti-Fracture	<ul style="list-style-type: none"> <li>125 TRI MAX™</li> <li>LATICRETE SOUND CONTORL UNDERLAYMENT</li> </ul>	Sound Control/ Anti-Fracture	<ul style="list-style-type: none"> <li>125 TRI MAX</li> <li>LATICRETE SOUND CONTORL UNDERLAYMENT</li> </ul>	Sound Control/ Anti-Fracture	<ul style="list-style-type: none"> <li>125 TRI MAX</li> <li>LATICRETE SOUND CONTORL UNDERLAYMENT</li> </ul>
Uncoupling Membrane	<ul style="list-style-type: none"> <li>STRATA_MAT™</li> </ul>	Uncoupling Membrane	<ul style="list-style-type: none"> <li>STRATA_MAT</li> </ul>	Uncoupling Membrane	<ul style="list-style-type: none"> <li>STRATA_MAT</li> </ul>
Thick Bed Method	<ul style="list-style-type: none"> <li>3701 Fortified Mortar Bed</li> <li>3701 Mortar Admix mixed with: 226 Thick Bed Mortar</li> </ul>	Thick Bed Method	<ul style="list-style-type: none"> <li>3701 Mortar Admix mixed with: 226 Thick Bed Mortar</li> </ul>	Thick Bed Mortar	<ul style="list-style-type: none"> <li>3701 Fortified Mortar Bed</li> <li>3701 Mortar Admix mixed with: 226 Thick Bed Mortar</li> </ul>
Slurry Bond Coat	<ul style="list-style-type: none"> <li>335 Adhesive</li> <li>254 Adhesive</li> <li>3701 Mortar Admix mixed with: 315 Adhesive</li> </ul>	Slurry Bond Coat	<ul style="list-style-type: none"> <li>254 Adhesive</li> <li>4237 Latex Additive mixed with: 211</li> <li>3701 Mortar Admix mixed with: 315 Adhesive</li> </ul>	Slurry Bond Coat	<ul style="list-style-type: none"> <li>254 Adhesive</li> <li>4237 Latex Additive mixed with: 211</li> <li>3701 Mortar Admix mixed with: 315 Adhesive</li> </ul>
Thin Bed Method	<ul style="list-style-type: none"> <li>254 Adhesive</li> <li>335 Adhesive</li> <li>335 LITE Adhesive</li> <li>LATAFLEX Gold Adhesive</li> <li>3701 Mortar Admix mixed with: 315 Adhesive</li> </ul>	Thin Bed Method	<ul style="list-style-type: none"> <li>LATAPOXY 300 Adhesive</li> <li>254 Adhesive</li> <li>4237 Latex Additive mixed with either of the following: 211; or 315 Adhesive</li> <li>3701 Mortar Admix mixed with: 315 Adhesive</li> </ul>	Thin Bed Method	<ul style="list-style-type: none"> <li>LATAPOXY 300 Adhesive</li> <li>257 TITANIUM™</li> <li>254 Adhesive</li> <li>4237 Latex Additive mixed with either of the following: 211; or 315 Adhesive</li> <li>3701 Mortar Admix mixed with: 315 Adhesive</li> </ul>
Grouting	<ul style="list-style-type: none"> <li>PERMACOLOR® Grout</li> <li>PERMACOLOR Select*</li> <li>PERMACOLOR NS</li> </ul>	Grouting	<ul style="list-style-type: none"> <li>SPECTRALOCK® PRO Premium Grout*</li> <li>LATAPOXY SP-100</li> <li>PERMACOLOR Grout (façades only)</li> <li>PERMACOLOR Select* (façades only)</li> <li>PERMACOLOR NS (façades only)</li> </ul>	Grouting	<ul style="list-style-type: none"> <li>SPECTRALOCK PRO Premium Grout*</li> <li>LATAPOXY SP-100</li> </ul>
Sealant	<ul style="list-style-type: none"> <li>LATASIL™ and 9118 Primer when required</li> </ul>	Sealant	<ul style="list-style-type: none"> <li>LATASIL and 9118 Primer when required</li> </ul>	Sealant	<ul style="list-style-type: none"> <li>LATASIL and 9118 Primer when required</li> </ul>

<sup>^</sup>United States Invention Patent No.: 6,784,229 (and other Patents).  
<sup>\*</sup>United States Invention Patent No.: 6,881,768 (and other Patents).  
 See www.laticrete.com.au for complete warranty information.  
 See separate warranties for swimming pools and water features.

# SWIMMING POOL SYSTEM WARRANTIES

The LATICRETE Pool, Spa and Fountain Tiling System is composed of time and job proven LATICRETE tile installation products which have been successfully installed around the world for over 65 years. It provides single source responsibility for these demanding, high performance applications. The LATICRETE System delivers superior performance with the latest technology in construction materials and methods.

The LATICRETE Pool, Spa and Fountain System with epoxy grouts, delivers greater chemical resistance, higher strengths and more flexibility.

**Single source systems approach for pools and spas:**

- LATICRETE® polymer fortified and epoxy adhesives provide ≥150% greater bond strength than Australian Standard requirements.
- LATICRETE® epoxy grouts provide greater chemical resistance than cementitious grouts.
- Single source supply of key system materials such as thick bed renders and screeds, waterproof membranes, tile adhesives and grouts.
- Safe, easy-to-install, water-cleanable products which reduce labour and improve productivity.

**In addition, the LATICRETE System provides:**

- Permanent installations - For the life of your structure.
- Technical services — We will help your architectural staff with proper specifications and details.
- Job site assistance — Our technical network assures that you will have on-site assistance when and where you need it.
- Guaranteed peace of mind — Written labour and materials warranty.



**10 Year Residential Swimming Pool Warranty**



APPLICATION	PRODUCTS
Slurry Bond Coat	▪ 335 Adhesive ▪ 254 Adhesive
Render/Mortar Beds/ Levelling Coat	▪ 3701 Fortified Mortar Bed ▪ 3701 Mortar Admix mixed with: 226 Thick Bed Mortar
Moisture Shield	▪ LATAPOXY® Moisture Shield ▪ HYDRO BAN® SLURRY
Waterproofing	▪ HYDRO BAN ▪ HYDRO BAN Fillet & Sealant
Thin Bed Method	▪ 335 Adhesive ▪ 254 Adhesive ▪ 4237 Latex Additive mixed with: PERMACOLOR® Grout
Grouting	▪ PERMACOLOR Grout ▪ PERMACOLOR Select

**LATICRETE 15 Year Swimming Pool Warranty**



APPLICATION	PRODUCTS
Slurry Bond Coat	▪ 254 Adhesive ▪ 4237 Latex Admix mixed with either: 211 or 315 Adhesive
Render/Mortar Beds/ Levelling Coat	▪ 3701 Mortar Admix mixed with: 226 Thick Bed Mortar
Moisture Shield	▪ LATAPOXY Moisture Shield ▪ HYDRO BAN Fillet & Sealant
Waterproofing	▪ HYDRO BAN ▪ HYDRO BAN Fillet & Sealant
Thin Bed Method	▪ 254 Adhesive ▪ 4237 Latex Admix mixed with either: 211 or 315 Adhesive
Grouting	▪ SPECTRALOCK® PRO Premium Grout* ▪ LATAPOXY SP-100

**LATICRETE 25 Year Swimming Pool Warranty**



APPLICATION	PRODUCTS
Slurry Bond Coat	▪ 254 Adhesive ▪ 4237 Latex Admix mixed with either: 211 or 315 Adhesive
Render/Mortar Beds/ Levelling Coat	▪ 3701 Mortar Admix mixed with: 226 Thick Bed Mortar
Moisture Shield	▪ LATAPOXY Moisture Shield ▪ HYDRO BAN Fillet & Sealant
Waterproofing	▪ HYDRO BAN ▪ HYDRO BAN Fillet & Sealant
Thin Bed Method	▪ LATAPOXY 300 Adhesive ▪ LATAPOXY SP-100
Grouting	▪ SPECTRALOCK PRO Premium Grout* ▪ LATAPOXY SP-100

\*United States Invention Patent No.: 6881768 (and other Patents).

See [www.laticrete.com.au/warranty](http://www.laticrete.com.au/warranty) for complete warranty information.

LATICRETE Swimming Pool System Warranties are to be registered with LATICRETE at [warranty@laticrete.com.au](mailto:warranty@laticrete.com.au). It is a condition of this warranty that the date of tiling completion is provided prior to filling the pool and an accredited and trained LATICRETE epoxy grouter is used.

[Click here to view/download our Pool, Spa and Fountain Tiling Systems Brochure](#)

# “EXTRA HEAVY DUTY” STREETSCAPE INSTALLATIONS

LATICRETE® products in this system are recommended for the installation of ceramic tile, concrete paver and natural stone where an “Extra Heavy Duty” installation that is required normally associated with transit ways, roads, footpaths and streetscapes. These systems are particularly suited to roads and areas required to handle heavy vehicular traffic.

Refer to [www.laticrete.com.au](http://www.laticrete.com.au) for installation charts, product application videos, Architectural Specifications, Architectural Details and comprehensive technical support. Provided that tile or stone are installed in accordance with applicable industry standards and written LATICRETE installation instructions, projects utilising LATICRETE products can qualify for a comprehensive LATICRETE System Warranty.

With a LATICRETE® System Warranty you can enjoy peace of mind with high-quality, world renowned LATICRETE products. When selecting the installation system for your project, consider the value and peace of mind that a LATICRETE warranty can bring.

LATICRETE provides comprehensive warranties covering commercial, residential, and industrial projects around the world. However, our best guarantee is over 65 years of experience with industrial, commercial and residential installations in every imaginable climate.

LATICRETE Australia warrants that LATICRETE products will be free from manufacturing defects and will not break down or deteriorate when installed in accordance with LATICRETE written specification and guidelines.

This warranty is valid for the original purchase and is not transferable. Please keep your tax invoice as the proof of purchase and proof of date on which the purchase was made. This warranty is limited to defects in product. All defective LATICRETE products will be repaired or replaced.

This warranty does not cover any defects caused by an accident, misuse, abuse, improper installation, lack of reasonable care, unauthorised modification, tampering or attempt to repair by a person not authorised by the original applicator; or any product that has been used for purpose other than its intended use.

For these limited warranties to apply, the applications that comprise the installation must be performed with the products listed in the particular document for each application (refer to the charts on this page).

LATICRETE 15 Year Commercial Warranty	
APPLICATION	PRODUCTS
Slurry Bond Coat	<ul style="list-style-type: none"> <li>4237 Latex Additive mixed with: 211 Crete Filler Powder</li> <li>3701 Mortar Admix mixed with: 315 Adhesive</li> </ul>
Moisture Shield	<ul style="list-style-type: none"> <li>LATAPOXY® MOISTURE SHIELD</li> <li>HYDRO BAN® Slurry</li> </ul>
Waterproofing/Anti-Fracture	<ul style="list-style-type: none"> <li>HYDRO BAN®</li> <li>HYDRO BAN Fillet &amp; Sealant</li> </ul>
Thick Bed Mortar	<ul style="list-style-type: none"> <li>3701 Mortar Admix mixed with: 226 Thick Bed Mortar</li> <li>101 Rapid Set Latex mixed with: 226 Mortar Bed Mix</li> </ul>
Thin Bed Method	<ul style="list-style-type: none"> <li>LATAPOXY® 300 Adhesive</li> <li>254 Platinum Adhesive</li> <li>4237 Latex Additive mixed with: 211 Crete Filler Powder</li> <li>4237 Latex Additive mixed with: 315 Adhesive</li> </ul>
Grout	<ul style="list-style-type: none"> <li>PERMACOLOR® Grout</li> <li>PERMACOLOR Select</li> <li>3701 Mortar Admix mixed with 226 Thick Bed Mortar</li> </ul>
Sealant	LATASIL™ and LATASIL 9118 Primer where required



Glebe Point and Parramatta Roads, Sydney NSW

[Click here to view/download the “Extra Heavy Duty” Streetscape Installations System brochure](#)

# FACADE SYSTEM WARRANTIES

With a LATICRETE® System Warranty you can enjoy peace of mind with high-quality, world renowned LATICRETE products. When selecting the installation system for your project, consider the value and peace of mind that a LATICRETE warranty can bring.

LATICRETE provides comprehensive warranties covering commercial, residential, and industrial projects around the world. However, our best guarantee is over 65+ years of experience with industrial, commercial and residential installations in every imaginable climate.

LATICRETE Australia warrants that LATICRETE products will be free from manufacturing defects and will not break down or deteriorate when installed in accordance with LATICRETE written specification and guidelines.

Our warranty for a defect or failure of a system under this system warranty is limited to the cost of replacing the specific portion of the System that has been proven to be defective, including the cost of the System, finishing materials and labour. Proof of purchase will be required. Warranties are not transferable or assignable.

This warranty does not cover any defects caused by an accident, misuse, abuse, improper installation, lack of reasonable care, unauthorised modification, tampering or attempt to repair by a person not authorised by the original applicator; or any product that has been used for purpose other than its intended use.

For these limited warranties to apply, the applications that comprise the installation must be performed with the products listed in the particular chart for each application (refer to the charts on this page). LATICRETE Façade Warranties are to be registered with LATICRETE at [warranty@laticrete.com.au](mailto:warranty@laticrete.com.au).



Sapphire by the Gardens, Melbourne VIC

^United States Invention Patent No.: 6,784,229 (and other Patents)

See [au.laticrete.com/en/support-and-downloads/product-support/warranties](http://au.laticrete.com/en/support-and-downloads/product-support/warranties) for complete warranty information.



LATICRETE 25 YEAR WARRANTY SYSTEM	
APPLICATION	PRODUCTS
<b>Skim Coat</b>	■ 254 Adhesive
<b>Render</b>	■ 3701 Mortar Admix mixed with 226 Thick Bed Mortar
<b>Moisture Shield</b>	■ LATAPOXY® Moisture Shield; or, ■ HYDRO BAN® SLURRY
<b>Waterproofing/Crack Isolation</b>	■ HYDRO BAN Waterproof Membrane ■ HYDRO BAN Fillet & Sealant
<b>Thin Bed Adhesive</b>	■ MVIS™ Veneer Mortar, ■ 254 Adhesive, ■ LATAPOXY 300 Adhesive ■ 4237 Latex Additive mixed with 211 ■ 257 TITANIUM™
<b>Grouts</b>	■ PERMACOLOR® Grout; or, ■ PERMACOLOR Select^
<b>Sealant</b>	■ LATASIL™ (and LATASIL 9118 Primer)

LATICRETE 15 YEAR WARRANTY FOR STEEL AND WOOD-FRAMED	
APPLICATION	PRODUCTS
<b>Skim Coat</b>	■ 254 Adhesive
<b>Moisture Shield</b>	■ LATAPOXY Moisture Shield; or, ■ HYDRO BAN SLURRY
<b>Waterproofing/Crack Isolation</b>	■ HYDRO BAN Waterproof Membrane ■ HYDRO BAN Fillet & Sealant
<b>Thin Bed Adhesive</b>	■ MVIS Veneer Mortar, ■ 254 Adhesive, ■ LATAPOXY® 300 Adhesive ■ LATAPOXY® 310 Adhesive ■ 4237 Latex Additive mixed with 211 ■ 257 TITANIUM™
<b>Grouts</b>	■ PERMACOLOR Grout; or, ■ PERMACOLOR Select^
<b>Sealant</b>	■ LATASIL (and LATASIL 9118 Primer)

LATICRETE 15 YEAR SPOT BONDING WARRANTY SYSTEM	
APPLICATION	PRODUCTS
<b>Spot Bonding Adhesive</b>	■ LATAPOXY® 310 Stone Adhesive Standard and Rapid grade
<b>Grouts</b>	■ PERMACOLOR Grout; or, ■ PERMACOLOR Select^
<b>Sealant</b>	■ LATASIL (and LATASIL 9118 Primer)





# LEARN INDUSTRY STANDARDS FROM EXPERTS IN THE FIELD AND FROM THE COMFORT OF YOUR HOME OR OFFICE

## BENEFITS

- Increase understanding of the tile and stone installation industry
- Expand knowledge of how to select and recommend the most suitable installation materials
- Increase knowledge of LATICRETE® products
- Learn trade definitions, performance requirements and industry standards
- Learn how to solve and avoid job problems
- Participate in hands-on product demonstrations

## SEMINAR LOCATION AND DATES

The seminars are conducted at LATICRETE Technical Training Centres and other professional training venues located across Australia. These include:

- Brisbane area, Queensland location: LATICRETE Australia 29 Telford Street, Virginia QLD 4014
- Sydney area, New South Wales location: LATICRETE Australia Unit 10, 11-19 Waler Crescent, Smeaton Grange, NSW 2567
- Melbourne area, Victoria location: LATICRETE Australia Unit 1, 26 Vella Drive, Sunshine West VIC 3020

## DAILY SCHEDULE

Experienced instructors utilise both classroom instruction and hands-on product demonstrations. You will also be able to meet with key LATICRETE personnel. Time is allocated for questions and discussion at the end of each day's presentation.

## PROGRAM INCLUDES

- All books, technical binders and product catalogues
- Graduation certificate
- LATICRETE promotional items

## LATICRETE "PROFIT THROUGH KNOWLEDGE" TECHNICAL SEMINARS

### Seminar Content

- Selecting the proper installation systems
- Substrates (preparation/requirements)
- Waterproofing membranes
- Epoxy and cement grouts
- Sales and marketing techniques
- Industry standards
- Types of tile and stone
- Latex Portland cement mortars
- Epoxy adhesives
- Hands-on product demonstration

## LEARN ONLINE AT YOUR LEISURE

LATICRETE UNIVERSITY is an online eLearning platform presenting vital industry and product information in short, easy online tutorials. LATICRETE UNIVERSITY makes it possible for anyone within the industry to train on industry standards and Profit Through Knowledge (PTK) Technical Seminars from the comfort of their home or office. Training has become necessary to learn about new products and modern technology. Travelling and leaving your business behind to attend training is not always easy or possible. Now anyone in your company can receive the quality information, previously possible only during live training sessions, within a short period of time and without leaving the job for an extended period of time.

## AUSTRALIAN "ON THE ROAD" SEMINARS

These sessions run for two days at various facilities - including your facility - around the country. Seminars begin at 8:00am and go to 5:00pm. A question and discussion period is held at the end of the day's presentation.

### Seminar Content

- Selecting the proper installation systems
- Substrates (preparation/requirements)
- Waterproofing membranes
- Epoxy and cement grouts
- Large format tile
- Industry standards
- Types of tile and stone
- Latex Portland cement mortars
- Epoxy adhesives
- Hands-on product demonstrations

### Program Includes

- Presentations by various LATICRETE corporate staff and field technical representatives
- Lunch and refreshment breaks
- Handouts
- Graduation certificate and promotional items



For further information, visit [www.laticrete.com.au](http://www.laticrete.com.au), call 1800 331 012, or email [seminars@laticrete.com.au](mailto:seminars@laticrete.com.au)



# CUSTOMER SUPPORT

LATICRETE provides you with online access to the latest in sales and marketing tools. Simply visit [www.laticrete.com.au](http://www.laticrete.com.au) to download the latest LATICRETE marketing support tools, and technical design manuals.

## GETTING SOCIAL WITH LATICRETE AUSTRALIA

Like and Follow LATICRETE on social media and....

- Be the first to know about product announcements
- Hear the latest industry news
- Discover installation tips
- Find product training near you
- Win LATICRETE merchandise
- Follow us on Facebook, Twitter, LinkedIn, Instagram



[laticreteaustralia](https://www.facebook.com/laticreteaustralia)



[laticreteaustralia](https://www.instagram.com/laticreteaustralia)



[LaticreteAus](https://twitter.com/LaticreteAus)



[laticrete-australia-pty-ltd](https://www.linkedin.com/company/laticrete-australia-pty-ltd)



[www.laticrete.com.au](http://www.laticrete.com.au)

## INSTALLATION SYSTEMS


# LATICRETE OFFERS A COMPLETE SYSTEM SOLUTION FOR VIRTUALLY EVERY TILE AND STONE APPLICATION.

LATICRETE has successfully provided the technology for innovative, permanent installations of tile and stone finishes. Architecturally specified and preferred by professional installers, LATICRETE provides solutions for virtually every application.


- LATICRETE® products are industry accepted, code approved, and backed by 100% labour and materials system warranties, thereby assuring a successful installation each and every time
- LATICRETE membranes, adhesives, grouts, and sealants are weather-resistant and freeze/thaw stable.

**For over 65+ years architects, engineers, and developers have trusted LATICRETE with their tile and stone installation needs. Let our experience, product quality, and technical support assist you on your next project—whatever the application.**


### WET AREAS AND CONTINUOUS UNDERWATER SUBMERSION

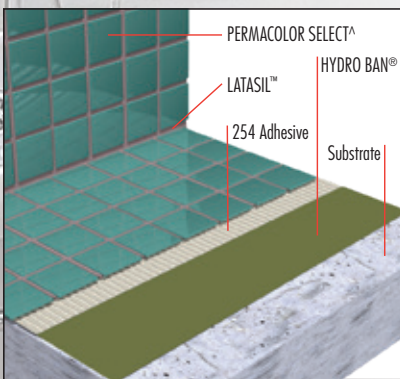

### COMMERCIAL AND INDUSTRIAL FLOORS AND WALLS

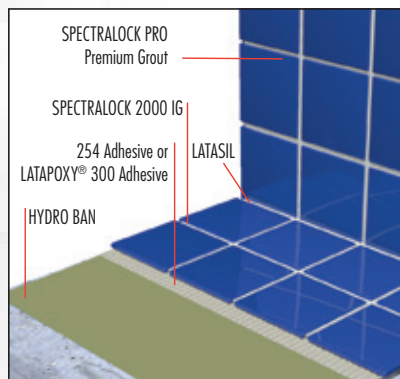

### SOUND CONTROL AND ANTI-FRACTURE

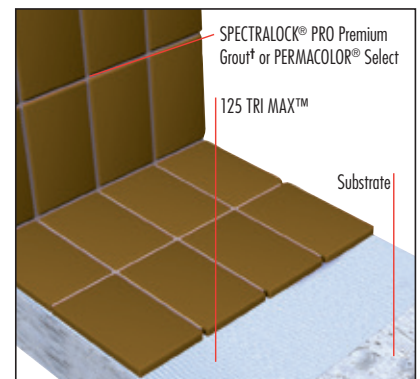

† United States Patent No.: 6,881,768 (and other Patents).

^ United States Patent No.: 6,784,229 (and other Patents).



## LATEX ADMIX

**4237 LATEX ADDITIVE**

Refer to Data Sheet: DS-1079



4237 Latex Additive is the original latex additive for tile and stone adhesives. Mix 4237 Latex Additive with 211 Crete filler powder to make a high strength, chemical, shock and vibration resistant adhesive. Suitable for swimming pools, facades, commercial and industrial tile and stone installations. Mix 4237 Latex Additive with PERMACOLOR® Grout to make a coloured adhesive for installing glass mosaics.

**FEATURES/BENEFITS:**

- For installing ceramic, porcelain tiles, adhered masonry veneer, brick and stone on concrete, brick, block and masonry surfaces
- Extra Heavy service rating per ASTM C627 (TCNA)
- Meets and exceeds AS ISO13007.1 as a C2TS2 when mixed with LATICRETE 315 Adhesive.

**PACKAGING**

**5 litre jug;** 3 per carton  
**20 litre pail;** 32 pails per pallet.

**4237 RAPID LATEX ADDITIVE**

Refer to Data Sheet: DS-1080



For a fast setting tile and stone adhesive. Mix 4237 Rapid Latex Additive with 211 to make a high strength, chemical, shock and vibration resistant adhesive. Suitable for swimming pools, facades, commercial and industrial tile and stone installations. 4237 Rapid Latex Additive is ready for foot traffic in 3 hours at room temperature 21°C.

**FEATURES/BENEFITS:**

- Ready for foot traffic - in 3 hours at 21°C
- Meets and exceeds AS ISO13007.1 as a C2FS1
- Extra heavy duty" rating.

**PACKAGING**

**20 litre pail;** 32 pails per pallet.

**3701 MORTAR ADMIX**

Refer to Data Sheet: DS-1046



3701 Mortar Admix is designed for use with 226 Thick Bed Mortar or Portland cement and sand mixes. 3701 Mortar Admix is a multiuse latex that will fortify any cement based adhesive or cement based tile grout. 3701 Mortar Admix can be mixed with 211 or neat cement for use as a slurry bond coat. Use 3701 Mortar Admix in place of water for screeds and renders. 3701 Mortar Admix increases the physical performance of Portland cement adhesives.

Used in place of water, 3701 Mortar Admix improves the working and physical properties of any cement mix and provides an economical and easy way to make permanent, trouble-free installations of ceramic tile, brick and natural stone.

**FEATURES/BENEFITS:**

- Use as a slurry bond coat
- Structural topping or render with known physical characteristics
- Increases the performance of Portland cement adhesives
- Shock, chemical and frost resistant
- Increased bond and compressive strength
- Water resistant; suitable for submerged applications
- Superior flexibility "Extra Heavy Service" rating per TCNA performance levels (RE: ASTM C627 Robinson Floor Test).

**PACKAGING**

**20 litre pail;** 32 pails per pallet.

## LATEX ADMIX Continued

**LATABOND™**

Refer to Data Sheet: DS-1078



LATABOND™ is a multipurpose latex admix for use in all cement based powders. LATABOND is mixed on the jobsite to make screeds, renders and stucco mixes. Use LATABOND in place of water to fortify cement based adhesives and tile grouts. LATABOND adds bond strength, compressive strength, reduces water absorption and increases shock resistance to all adhesives.

**FEATURES/BENEFITS:**

- Excellent bond and compressive strength
- Reduces water absorption
- Increases shock resistance to all adhesives.

**PACKAGING**

**20 litre pail;** 32 pails per pallet.

**101 RAPID LATEX ADMIX**

Refer to Data Sheet: DS-1071



101 Rapid Latex Admix will mix with any cement based powder to increase performance and shorten the setting time. 101 Rapid Latex Admix can be used as an admix to renders, screeds, cement based adhesives and grout. For use in patching concrete and toppings. When mixed with 315 Super Floor and Wall, tiles can be grouted in 3 hours and ready for traffic in 4 hours at 23°C room temperature. Meets the requirements of a C2FS1 classification.

**FEATURES/BENEFITS:**

- Versatile high strength formula - wet and dry areas, walls, flooring, ceiling, interior and exterior
- Premixed - no jobsite blending of powders required
- Safe, non-flammable; safe to store and mix
- "Extra Heavy Service" rating per TCNA performance levels (RE: ASTM C627 Robinson Floor Test).

**PACKAGING**

**20 litre pail;** 32 pails per pallet.







## MORTAR POWDER

## 226 THICK BED MORTAR

Refer to Data Sheet: DS-1063



A factory-prepared blend of high-strength Portland cement and graded aggregates for thick bed applications for use with 3701 Mortar Admix. Provides high performance, superior workability, tight quality control, and job site convenience. 226 Thick Bed Mortar can be fortified with 101 Rapid Latex Admix. Mix 1.7 to 1.9 litres of latex admix with a 20kg bag of 226 Thick Bed Mortar for semi-dry screeds. Or mix with 2.4 to 2.5 litres of latex admix with a 20kg bag of 226 Thick Bed Mortar for renders.

### Approximate Coverage

1m<sup>2</sup> at 10mm thick

2m<sup>2</sup> at 5mm thick

### FEATURES/BENEFITS:

- Versatile high strength formula - wet and dry areas, walls, flooring, ceiling, interior and exterior
- Premixed - no jobsite blending of powders required
- Safe, non-flammable; safe to store and mix
- "Extra Heavy Service" rating per TCNA performance levels (RE: ASTM C627 Robinson Floor Test).

### PACKAGING

**20kg bag:** 56 bags per pallet.

### COLOUR

Grey.

## 211

Refer to Data Sheet: DS-1064



A factory blend of high-strength Portland cement and graded sand for use with 4237 Latex Additive. For use with 3701 Mortar Admix as a slurry bond coat. Provides high performance, tight quality control and jobsite convenience. When mixed with 4237, meets and exceeds the requirements of AS ISO13007.1 as a C2ES1.

### Approximate Coverage

7 – 8m<sup>2</sup>/bag using a 6mm x 6mm notched trowel

4 – 5m<sup>2</sup>/bag using a 10mm x 10mm notched trowel

### FEATURES/BENEFITS:

- High strength formula – meets and exceeds National and International Standards
- Premixed – no jobsite blending of powders required
- Safe – non-flammable; Safe to store and mix
- Economical – saves time and money
- Easy to use – no special tools required
- Versatile – wet and dry areas, walls, floors and ceilings
- Excellent for use in swimming pools, fountains and water features.

### PACKAGING

**20kg bag:** 56 bags per pallet.

### COLOURS

Grey; White.

## 3701 FORTIFIED MORTAR BED

Refer to Data Sheet: DS-1000



3701 Fortified Mortar Bed is a polymer fortified blend of carefully selected polymers, Portland cement and graded aggregates. 3701 Fortified Mortar Bed does not require the use of latex admix, you only need to add water to produce thick bed mortar with exceptional strength.

### Approximate Coverage

1m<sup>2</sup> at 10mm thick

2m<sup>2</sup> at 5mm thick

### FEATURES/BENEFITS:

- Polymer fortified - no need for latex additives
- Economical - saves time and money
- Exceeds ASTM C270 requirements
- High strength formula
- Pumpable for large scale veneer projects.

### PACKAGING

**20kg bag:** 56 bags per pallet.

### COLOURS

Grey.





## SELF LEVELLING AND PRIMER

## LEVEL

Refer to Data Sheet: DS-1234



LEVEL is a cement-based underlayment for use in levelling interior substrates. LEVEL produces a flat, smooth and hard surface for the installation of flooring finishes. LEVEL can be placed from 3mm – 76mm in a single lift.

## Approximate Coverage PER 20 kg bag

Nominal Thickness - Approximate Coverage

3mm - 3.9m <sup>2</sup>	25mm - 0.47m <sup>2</sup>
5mm - 2.34m <sup>2</sup>	50mm - 0.23m <sup>2</sup>
10mm - 1.17m <sup>2</sup>	76mm - 0.15m <sup>2</sup>

## FEATURES/BENEFITS:

- Pourable and pumpable
- Inorganic; will not contribute to mould/mildew growth
- Suitable surface for most finished floor goods
- Can be applied directly over concrete testing at RH of 95% or less per ASTM F2170

## PACKAGING

20kg bag; 56 bags per pallet.

## COLOUR

Grey.

## REQUIRED

PRIMER.

## PRIMER

Refer to Data Sheet: DS-1236



PRIMER is a concentrated premium quality, water-based primer designed to be applied prior to the installation of LATICRETE underlayments. PRIMER penetrates deeply into substrates and maximizes bond strength.

## Approximate Coverage

PRIMER is a concentrate and must be diluted with clean potable water. Dilution ratio varies depending on the substrate.  
Mix/stir concentrate thoroughly prior to diluting

## FEATURES/BENEFITS:

- PRIMER is multi-purpose and can be used on a wide range of substrates
- PRIMER may be broom, roller, or spray applied
- Fast drying formula

## PACKAGING

5 litre bottle.

## COLOUR

Milky.

## PRIME-N-BOND™

Refer to Data Sheet: DS-1258



PRIME-N-BOND™ is a versatile, ready-to-use, single coat, low VOC primer designed to enhance the adhesion of adhesives to many smooth and non-absorptive substrates that can be difficult to bond to. PRIME-N-BOND also improves bonding of self-levelling underlayments (SLU's).

## Approximate Coverage

(varies depending on substrate)  
5 Litre Pail: 18m<sup>2</sup> – 37m<sup>2</sup>

## FEATURES/BENEFITS:

- Multi-purpose - can be used on a wide range of substrates
- One component, ready to use, no mixing required
- Single coat application - apply with roller or brush
- Formulated with aggregate for an enhanced mechanical bond of mortars to a variety of smooth or low-absorptive substrates
- Improves bonding of cement self-levelling products (SLU's)
- Low VOC, low odour, ideal for interior and occupied areas
- Fast drying formula

## PACKAGING

5 litre pail.



## UNDERLAYMENT

## STRATA\_MAT™

Refer to Data Sheet: DS-1134



STRATA\_MAT™ is a next generation high performance uncoupling mat for use under tile and stone installations. Suitable for both residential and commercial applications. Designed to replace traditional underlayment materials. The unique patent pending design of STRATA\_MAT provides for an enhanced mechanical bond of the adhesive and provides for faster drying of the adhesive allowing for shorter time to grout. Specifically designed for use with both fortified and unfortified adhesives, STRATA\_MAT allows for the proper adhesive to be used with porcelain or large format tiles and stone.

## FEATURES/BENEFITS:

- Allows independent movement between tile and substrate
- Provides vapour management
- Part of the LATICRETE Lifetime System Warranty
- Extra Heavy Duty™ per ASTM C627

## PACKAGING

**1.1m x 12.2 linear metre roll;** 20 rolls per pallet

**1.1m x 26.2 linear metre roll;** 12 rolls per pallet.





SOUND CONTROL

## 125 TRI MAX®

Refer to Data Sheet: DS-1255




125 TRI MAX® provides impact sound isolation protection while simultaneously protecting the tile or stone finish from any cracking by reducing the transmission of stresses in the substrate through to the tile or stone finish.

**Approximate Coverage** 11.4kg bag  
When back buttering tile for sound control applications, there will be a significant decrease in coverage.

6.8 – 7.6m<sup>2</sup> per bag with a 6mm x 6mm trowel

4.6 – 5.0m<sup>2</sup> per bag with a 6mm x 9mm trowel

3.4 – 3.8 m<sup>2</sup> per bag with a 12mm x 12mm trowel

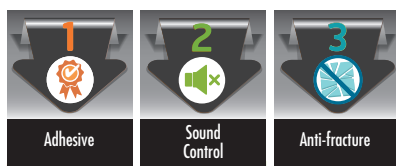

### FEATURES/BENEFITS:

- Anti-fracture and sound reduction in one step – install tile fast reducing labour and material cost by 15 to 20%
- Single component (just add water) making it easy to mix, spread and use
- Lightweight, 22.7kg coverage in a 11.4kg bag
- 36% post-consumer recycled content contributes to LEED
- Fibre reinforced producing a stronger bond
- Heavy per ASTM C627 Robinson Floor Test – TCNA so you can use it in high traffic areas.

### PACKAGING


**11.4kg bag; 56 bags per pallet.**

### COLOUR

Grey.

## LATICRETE SOUND CONTROL UNDERLAYMENT

Refer to Data Sheet: DS-1250

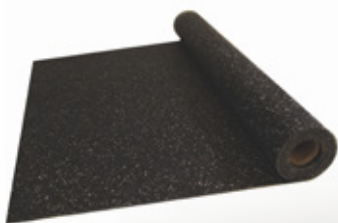

LATICRETE SOUND CONTROL UNDERLAYMENT reduced sound transmission mat is a high performance acoustical underlayment that is engineered to reduce impact noise through ceramic tiles, stone and other hard surface materials. LATICRETE SOUND CONTROL UNDERLAYMENT is easy to install and will not break down under load. LATICRETE SOUND CONTROL UNDERLAYMENT is a flat, resilient, reduced sound transmission mat made from 94% recycled rubber content.

### FEATURES/BENEFITS:

- Reduces sound transmission and isolates impact.
- Eliminates transmission of substrate cracks of up to 3mm from transferring to the finished floor.
- Meets ANSI A118.12 point load requirements.
- Easy and fast to install with standard tools.

### PACKAGING

**RST03 - 3mm thick:** 1.22m X 9.14m roll

**RST05 - 5mm thick:** 1.22m X 9.10m roll.





VAPOUR BARRIER

## LATAPOXY® MOISTURE SHIELD

Refer to Data Sheet: DS-1176



LATAPOXY® Moisture Shield is a 2 component, roller applied epoxy coating specifically designed to reduce moisture vapour emissions in concrete and other substrates.

**Approximate Coverage PER 20L Unit**

Each full unit will yield approximately 30m<sup>2</sup> per unit with a thickness suitable for blocking higher levels of moisture vapour transmission.

**FEATURES/BENEFITS:**

- Easy to use - rolls on like paint
- Cures in 24 hours
- Can be applied over green concrete (min. 7 days old).

**PACKAGING**

**20 litre unit (10 litre Part A and 10 litre Part B);**  
32 units per pallet.

## HYDRO BAN® SLURRY

Refer to Data Sheet: DS-1259



HYDRO BAN® SLURRY is a cement based, one component, polymer fortified material that mixes with water and easily applies with brush, roller or trowel. This product can be used on retaining walls, water features, slabs on ground and immersed installations where water resistance or protection from substrate moisture is required. HYDRO BAN SLURRY is suitable for areas requiring negative hydrostatic pressure resistance up to 2.5 BARS and positive hydrostatic pressure up to 5 BARS.

**Approximate Coverage PER 20kg bag**

8m<sup>2</sup> per 20kg bag at a Dry Film Thickness of 2mm (Two Coats)

**FEATURES/BENEFITS:**

- Reduces hydrostatic pressure and moisture vapour transmission rates of substrate
- Can be used under HYDRO BAN in swimming pools where negative hydrostatic pressure resistance is required.
- Does not require the use of fabric
- Can be used under cementitious pool plasters
- Bonds directly to metal, PVC and ABS plumbing fixtures
- "Extra Heavy Service" rating per TCNA performance levels (RE: ASTM C627 Robinson Floor Test)
- Rapid drying for a faster time to tile
- Install tile or pavers directly over with a LATICRETE tile adhesive.


**PACKAGING**

**20kg bag;** 56 bags per pallet.

**COLOUR**

Grey.



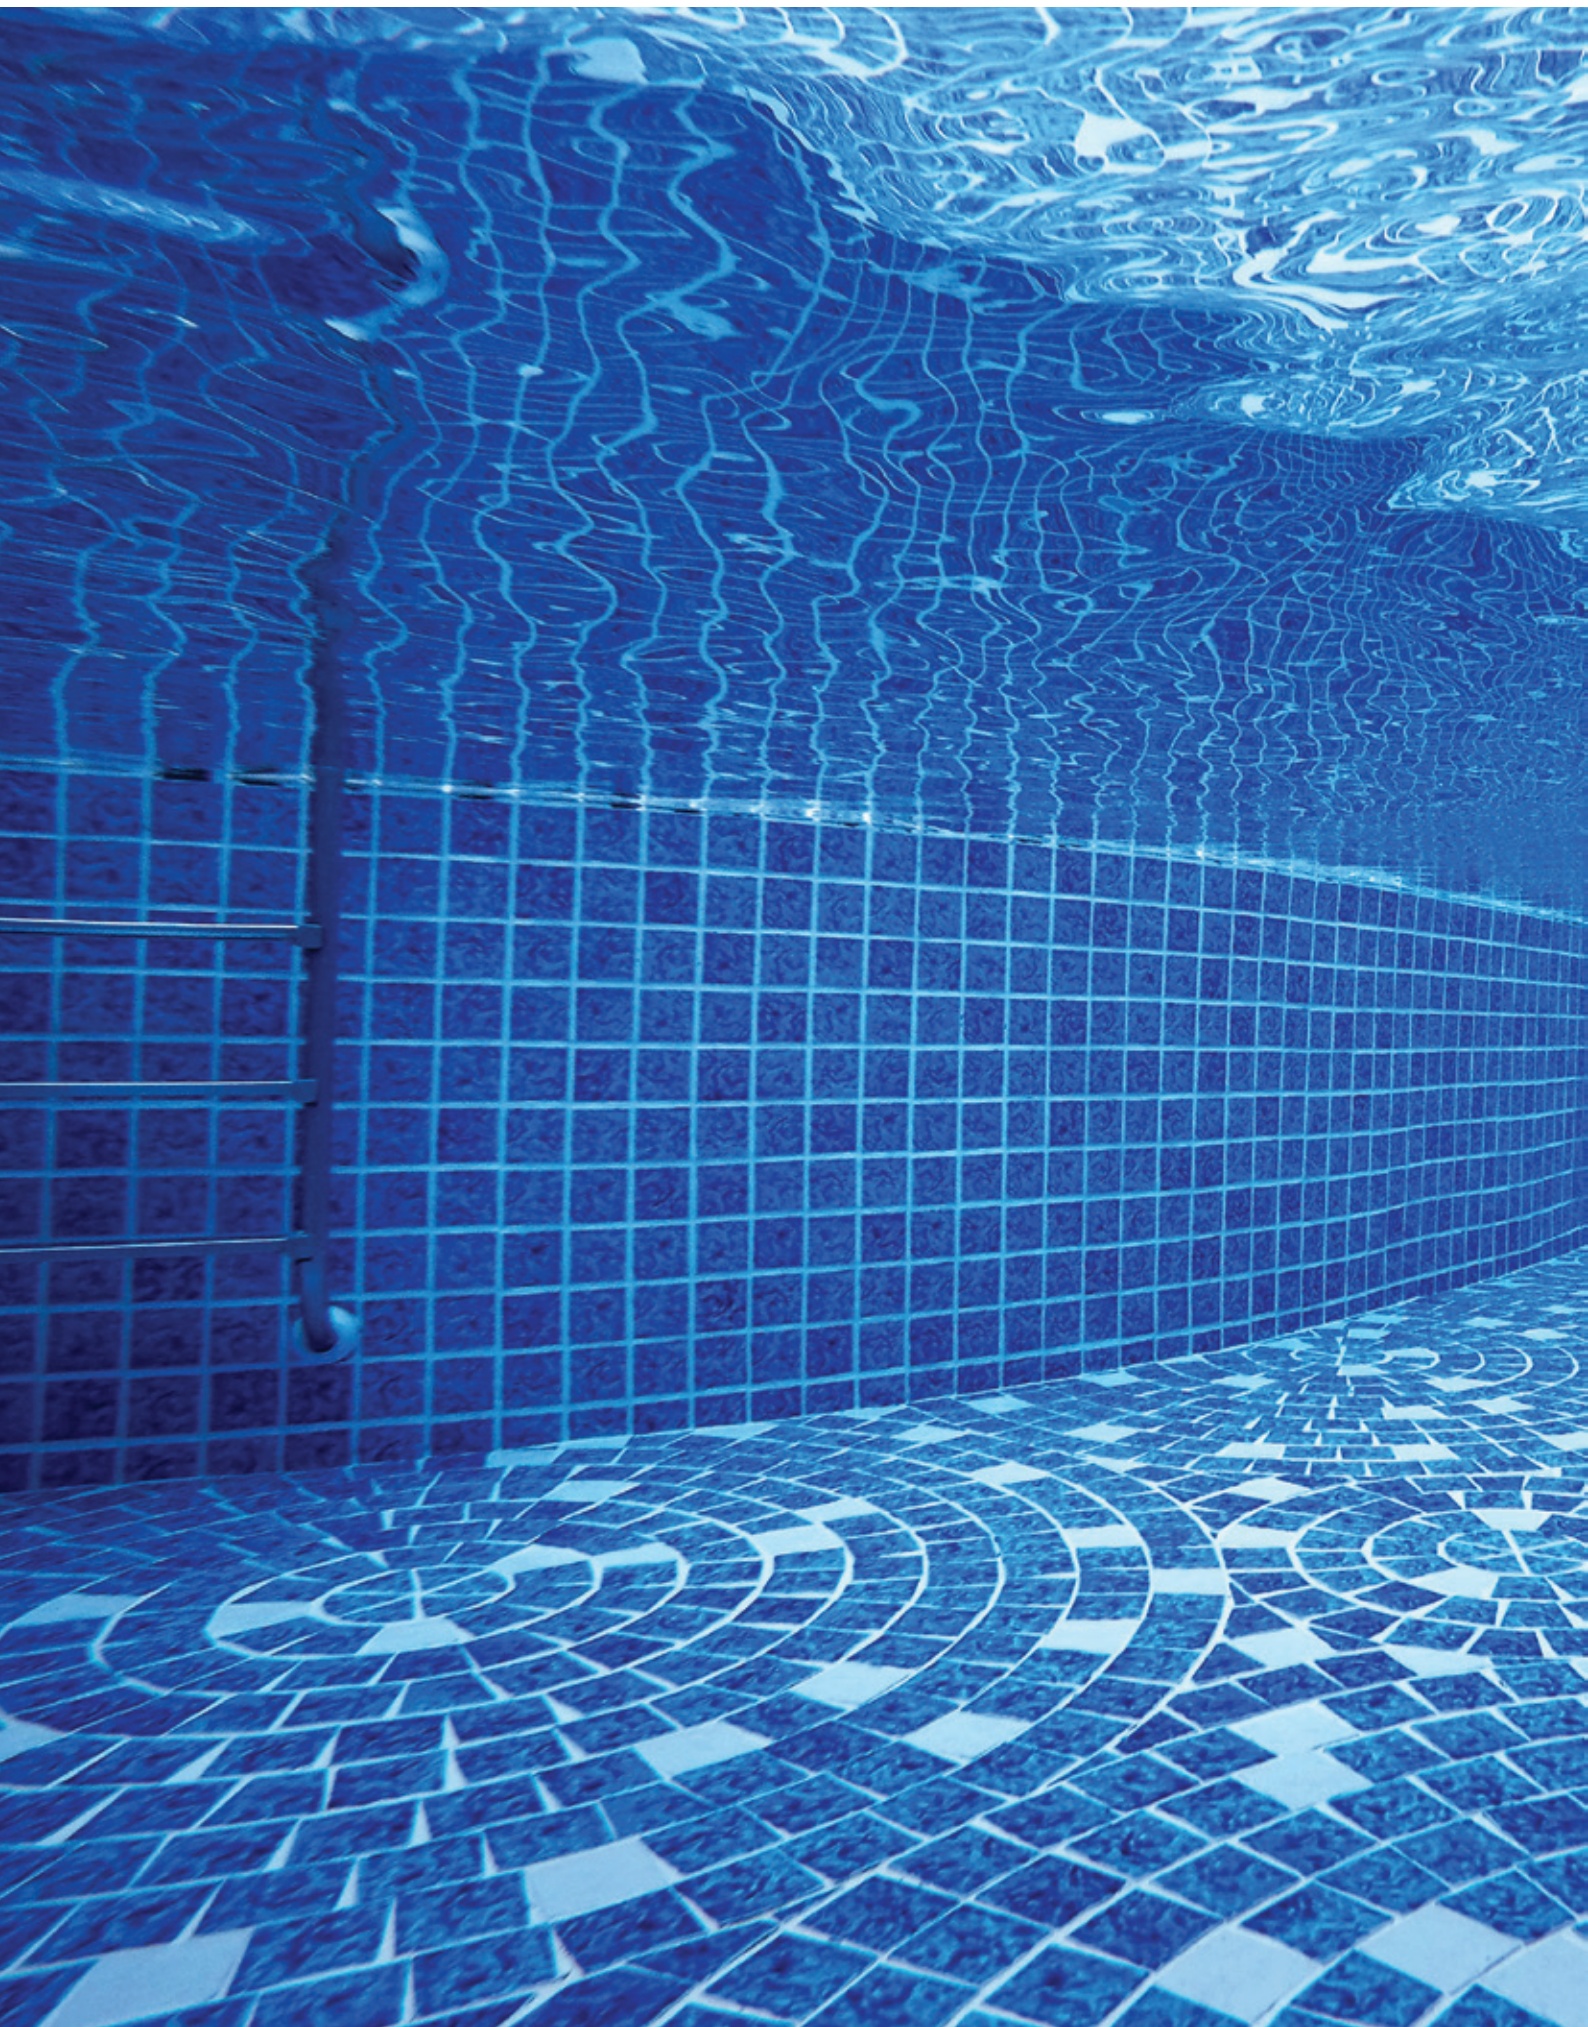

WATERPROOFING MEMBRANE

**HYDRO BAN®**

Refer to Data Sheet: DS-1036



HYDRO BAN is a thin, load bearing waterproofing/crack isolation membrane that DOES NOT require the use of fabric in the field, coves or corners. HYDRO BAN is a single component self curing liquid rubber polymer that forms a flexible, seamless waterproofing membrane that bonds directly to a wide variety of substrates. HYDRO BAN is a low VOC emitting product that has been GREENGUARD certified. HYDRO BAN is a highly extensible Class 3 membrane suitable for immersed installations, internal wet areas and external above ground use.

Approximate Coverage	
Per Trade Unit	18m <sup>2</sup>
Per Mini Unit	4.8m <sup>2</sup>

**FEATURES/BENEFITS:**

- A rapid drying membrane that can be tiled to directly
- CSIRO tested
- Anti-fracture protection up to 3mm
- Easy to clean with water
- Meets and exceeds the requirements of AS4858 and AS4654.1.

**PACKAGING**

**Trade Unit: 15 litre pail;** 36 pails per pallet  
**Mini Unit: 3 x 4 litre units per carton;** 32 cartons per pallet.



In addition to rolling, brushing or trowelling, HYDRO BAN® can be sprayed with an airless spraying equipment. HYDRO BAN can be effectively sprayed to increase productivity up to 3x or 4x on large projects. Any airless sprayer can be used which will deliver up to 3300 PSI (22.8 MPa) using a maximum tip size of 0.79mm. See TDS1004 for further information on the application of HYDRO BAN with an airless sprayer.

**HYDRO BAN®  
 FILLET &  
 SEALANT**

Refer to Data Sheet: DS-1196



HYDRO BAN® Fillet & Sealant is a one component, fast curing, hybrid elastomeric adhesive and sealant. This product is specifically formulated to meet today's Green Building Standards and has excellent adhesion on a wide variety of substrates. Particularly for use under HYDRO BAN Waterproof Membrane as a transition fillet and crack filler.

**FEATURES/BENEFITS:**

- Excellent adhesion on nearly ALL substrates including polystyrene
- Fast cure
- Excellent durability
- Superior flexibility
- Will NOT shrink or crack
- NO harmful components
- VOC compliant
- Contains no solvents or isocyanates.

**PACKAGING**

**600ml sausage;** packed 20x sausages per carton.  
 56 cartons per pallet



LIGHTWEIGHT & SAND-FREE THIN-SET ADHESIVE



## 257 TITANIUM™

See Data Sheet: DS-1275



\*When used as part of the LATICRETE 25 Year System Warranty DS – 1146

The ultimate, sand free, lightweight, polymer fortified, thin-set adhesive for the installation of ceramic, stone and glass tiles. 257 TITANIUM™ is designed with key features to facilitate the installation of large format porcelain panels and slabs with its long open time, good adjustability and superior adhesive for maximum coverage and easier handling. Rated for exterior installations.

Approximate Coverage (per 11kg bag)

7 – 8 m<sup>2</sup> / 6 mm x 6 mm notched trowel

4.5 – 5.5 m<sup>2</sup> / 10 mm x 10 mm notched trowel

4 – 5 m<sup>2</sup> / 12 mm x 12 mm notched trowel

### FEATURES/BENEFITS:

- Optimal performance for Gauged Porcelain Panels/Slabs
- Extended open time
- Lightweight - 11kg bag has coverage of a 20kg traditional bag
- Formulated<sup>^</sup> without sand to reduce respirable silica
- Conforms to ISO 13007-1 with a classification of C2TES2
- Superior for exterior and interior applications
- High shear bond strength
- 25 Year System Warranty<sup>\*</sup>

### PACKAGING

11kg bag; 56 bags per pallet.

### COLOUR

White



## 335 LITE

See Data Sheet: DS-1275



\*Not formulated with silica sand. However, may contain traces of respirable crystalline silica as it is made with equipment that processes silica sand.

A premium, sand free, lightweight, high performance thin-set adhesive for the installation of large format ceramic, porcelain & stone tile. 335 LITE is designed with key feature like long open time, good adjustability and great workability. 11kg bag has the same coverage as a traditional 20kg bag. Rated for interior and exterior installations.

Approximate Coverage (per 11kg bag)

6.5 – 7 m<sup>2</sup> / 6 mm x 6 mm notched trowel

4 – 4.5 m<sup>2</sup> / 10 mm x 10 mm notched trowel

3.3 – 3.8 m<sup>2</sup> / 12 mm x 12 mm notched trowel.

### FEATURES/BENEFITS:

- Optimal performance for large format ceramic tile
- Lightweight - 11kg bag has coverage of a 20kg traditional bag
- Formulated<sup>^</sup> without sand to reduce respirable silica
- 30 minute open time
- Ultimate adhesion for porcelain and glass tiles
- Excellent sag resistance while easy to trowel.

### PACKAGING

11kg bag; 56 bags per pallet.

### COLOUR

Off-White



## ADHESIVE

## 254 ADHESIVE

See Data Sheet: DS-1166



254 is the ultimate one-step, polymer fortified, thin-set adhesive for interior, exterior or immersed installations of ceramic tile, reduced thickness porcelain, stone, quarry tile, pavers and brick. 254 adhesive, designed to just mix with water, has a long open time with unsurpassed adhesion and workability. The preferred adhesive for immersed installations.

May be mixed with PERMACOLOR® Select pigment packs for a coloured adhesive. Meets and exceeds the requirements of AS ISO13007.1 classification as a C2TES2P2.

**Approximate Coverage 20kg bag (Based on product wet densities with a trowel at 45°)**

7.5 – 8.5m<sup>2</sup> with a 6mm x 6mm notched trowel

4.5 – 5.5m<sup>2</sup> with a 10mm x 10mm notched trowel

3.5 – 4.5m<sup>2</sup> with a 12mm x 12mm notched trowel

**FEATURES/BENEFITS:**

- High performance flexible cement based adhesive
- One-step, just mix with water
- Excellent for large thin porcelain panel & tile
- Part of the LATICRETE System Warranty
- Exhibits minimal or no sagging when applied to vertical or inverted applications
- White adhesive can be used with PERMACOLOR® Select pigment packs for coloured adhesive.

**PACKAGING**

**20kg bag;** 56 bags per pallet.

**COLOUR**

Off-White, White.

## 335 ADHESIVE

See Data Sheet: DS-1037



335 adhesive is a premium, flexible, high performance thin-bed adhesive for installing a wide range of tiles and stone including low absorption ceramic tile, porcelain tile, natural and manufactured stone using thin-set method of installation.

Excellent for exterior and immersed installations. Superior bond to concrete and masonry. The high performance thin-set for porcelain and glass tile. An everyday high performance bond coat for mortar beds.

Exceeds the requirements of AS ISO13007.1 classification C2TES1.

**Approximate Coverage (Based on product wet densities with a trowel at 45°)**

7 – 8m<sup>2</sup>/bag using a 6mm x 6mm notched trowel

4.5 – 5.5m<sup>2</sup>/bag using a 10mm x 10mm notched trowel

**FEATURES/BENEFITS:**

- Ideal for submerged applications such as swimming pool and water features
- Improved flexural and adhesive strength. Bonds to low porosity tiles and substrates
- Mix only with water, no additive required.

**PACKAGING**

**20kg bag;** 56 bags per pallet.

**COLOUR**

Off-White; White.

## 335 RAPID ADHESIVE

See Data Sheet: DS-1002



335 RAPID adhesive is a premium, flexible, high performance, rapid setting thin-bed adhesive for installing a wide range of tiles and stone including low absorption ceramic tile, porcelain tile, natural and manufactured stone using thin-set method of installation.

Excellent for cold weather applications and where quicker times to traffic are required. Grout and open to traffic in 4 hours.

Exceeds the requirements of AS ISO13007.1 classification C2TFS1.

**Approximate Coverage (Based on product wet densities with a trowel at 45°)**

7 – 8m<sup>2</sup>/bag using a 6mm x 6mm notched trowel

4.5 – 5.5m<sup>2</sup>/bag using a 10mm x 10mm notched trowel

**FEATURES/BENEFITS:**

- Interior and exterior use
- High performance flexible cement based adhesive
- High tack, non sag
- Easy to use - plastic and workable.

**PACKAGING**

**20kg bag;** 56 bags per pallet.

**COLOUR**

Grey; White.

## ADHESIVE Continued

## ULTRA X8 ADHESIVE

Refer to Data Sheet: DS-1038



ULTRA X8 is a polymer fortified, flexible, creamy and smooth to trowel thin-set adhesive for interior and exterior installation of all types of tile and stone over a wide range of surfaces. ULTRA X8 adhesive can be fortified with LATICRETE Latex Additives for a wide range of installations. Exceeds the requirements of AS ISO 13007.1 as a CITES1 classification.

### Approximate Coverage (Based on product wet densities with a trowel at 45°)

7 – 8m<sup>2</sup>/bag using a 6mm x 6mm notched trowel

4 – 5m<sup>2</sup>/bag using a 10mm x 10mm notched trowel

### FEATURES/BENEFITS:

- Economical - excellent balance of performance and coverage
- Fibre reinforced for better workability
- Non-sag and non-shrink performance
- Strong bond - suitable for wide range of internal and external substrates.

### PACKAGING

**20kg bag;** 56 bags per pallet.

### COLOUR

White.

## LATAFLEX GOLD ADHESIVE

Refer to Data Sheet: DS-1040



LATAFLEX Gold Adhesive is a superior polymer fortified bagged cementitious thin-set powder to be mixed with water to install ceramic tile and natural stone using the thin-set method of installation.

Designed for interior and exterior floor and wall installations of all types of ceramic tiles, porcelain tile and stone over concrete, exterior glue plywood and a variety of substrates. Meets and exceeds the requirements of AS ISO13007.1 as a CITES1 classification.

### Approximate Coverage (Based on product wet densities with a trowel at 45°)

9 – 10m<sup>2</sup>/bag using a 6mm x 6mm notched trowel

5 – 6m<sup>2</sup>/bag using a 10mm x 10mm notched trowel

### FEATURES/BENEFITS:

- Rubber polymer fortified thin-set provides flexible, high bond and reduces transmission of cracks
- Green - consumes recycled rubber
- 30 minute open time - provides productivity and flexibility on the job site.

### PACKAGING

**20kg bag;** 56 bags per pallet.

### COLOUR

Off-White.



## ADHESIVE Continued

## MULTIFLEX ADHESIVE

Refer to Data Sheet: DS-1053



An economical flexible rubber based multipurpose adhesive for installing ceramic tile, quarry tile and stone. Ideal for installing tile and stone over cement sheet, suitable waterproof membrane, plasterboard, tile and masonry in internal installations. Meets and exceeds the requirements of AS ISO13007.1 and 2 as a CITES1 classification.

### Approximate Coverage (Based on product wet densities with a trowel at 45°)

8 – 9m<sup>2</sup>/bag using a 6mm x 6mm notched trowel

5 – 6m<sup>2</sup>/bag using a 10mm x 10mm notched trowel

### FEATURES/BENEFITS:

- Superior adhesion to a wide variety of substrates and veneers
- Suitable for virtually all climates and conditions
- Responsibly Green - Rubber-modified adhesive.

### PACKAGING

**20kg bag;** 56 bags per pallet.

### COLOURS

Off-White

## 315 ADHESIVE

Refer to Data Sheet: DS-1050



315 is a high performance thin-set adhesive to install tile and stone using the thin-bed method of installation. Suitable for a wide variety of internal and external substrates. When mixed with LATABOND, the adhesive is suitable for plasterboard, cement sheet and suitable waterproof membrane. For swimming pool use, mix with 3701 Mortar Admix. Meets and exceeds the requirements of AS ISO13007.1 as a C2E classification.

### Approximate Coverage (Based on product wet densities with a trowel at 45°)

7 – 8m<sup>2</sup>/bag using a 6mm x 6mm notched trowel

4.5 – 5.5m<sup>2</sup>/bag using a 10mm x 10mm notched trowel

### FEATURES/BENEFITS:

- Strong adhesion to a wide variety of internal and external substrates
- Smooth creamy formula provides easy to trowel adhesive, guaranteeing proper coverage
- Can be used with latex, boost with 4237 Latex Additive for drywall and immersed installations
- Use as a rapid set adhesive when mixing with 101 Rapid Set Latex.

### PACKAGING

**20kg bag;** 56 bags per pallet.

### COLOUR

Off-White; Grey.

## MULTIMASTIC PREMIUM ADHESIVE

Refer to Data Sheet: DS-1052



Multimastic Premium Adhesive is a white, one-pot adhesive designed for interior installations of ceramic tile on both wall and floors. Multimastic Premium Adhesive is a special non-s slump formula that allows the tiler to hang a tile without the need for spacers. Meets and exceeds the requirements of AS ISO13007.1 as a D1TE classification.

### Approximate Coverage Per 15 Litre Pail

NOTCH TROWEL	COVERAGE
6mm x 6mm	7 – 8m <sup>2</sup>
8mm x 8mm	5 – 6m <sup>2</sup>

### Approximate Coverage Per 4 Litre Pail

NOTCH TROWEL	COVERAGE
6mm x 6mm	1.8 – 2.1m <sup>2</sup>
8mm x 8mm	1.3 – 1.6m <sup>2</sup>

### FEATURES/BENEFITS:

- Creamy and smooth
- For installations over plasterboard, cement sheet, render and concrete
- Water-resistant.

### PACKAGING

**4 litre pail;** 3 pails per carton; 32 cartons per pallet  
**15 litre pail;** 32 pails per pallet.

### COLOUR

White.

### COVERAGE NOTES

**Tile Adhesives;** Coverage figures quoted for tile adhesives are based on wet densities with a trowel being used at 45°. Actual coverage will vary depending on job site conditions and wastage. Expanded coverage tables at [www.laticrete.com/coverage](http://www.laticrete.com/coverage).







SPECIALISED ADHESIVE

## 125 TRI MAX™

Refer to Data Sheet: DS-1255



125 TRI MAX® provides impact sound isolation protection while simultaneously protecting the tile or stone finish from any cracking by reducing the transmission of stresses in the substrate through to the tile or stone finish.

**Approximate Coverage** 11.4kg bag When back buttering tile for sound control applications, there will be a significant decrease in coverage.

6.8 – 7.6m<sup>2</sup> with 6mm x 6mm notched trowel

4.6 – 5.0m<sup>2</sup> with 6mm x 9mm notched trowel

3.4 – 3.8m<sup>2</sup> with 12mm x 12mm notched trowel



### FEATURES/BENEFITS:

- Anti-fracture and sound reduction in one step – install tile fast reducing labour and material cost by 15 to 20%
- Single component (just add water) making it easy to mix, spread and use
- Lightweight, 22.7kg coverage in an 11.4kg bag
- 36% post-consumer recycled content contributes to LEED
- Fibre reinforced producing a stronger bond
- Heavy per ASTM C627 Robinson Floor Test – TCNA so you can use it in high traffic areas.

### PACKAGING

11.4kg bags.

### COLOUR

Grey.

## MVIS™ VENEER MORTAR

Refer to Data Sheet: DS-1076



MVIS™ (Masonry Veneer Installation System) Veneer Mortar is a patented, versatile polymer fortified adhesive mortar designed specifically for the installation of adhered masonry veneer, stone and thin brick. A high performance mix provides maximum non-sag performance for vertical installations and also obtains maximum bond strength to the substrate and selected veneers. Masonry Veneer Mortar offers exceptional workability. Meets and exceeds the requirements of AS ISO13007.1 as a C2TS1.

**Approximate Coverage Per 20kg bag**

TOWEL NOTCH FOR THIN BEDS	m <sup>2</sup>
NOTCH TROWEL	COVERAGE
6mm x 6mm notched trowel	8.3 – 9.3
10mm x 10mm notched trowel	5.0 – 5.5
12mm x 12mm notched trowel	4.0 – 4.5
Adhered Masonry Application Method	2.75 – 3.25

### FEATURES/BENEFITS:

- Incredible non-sag performance - faster, easier installations
- Lightweight mortar - very smooth and easy to apply
- Certified for low VOC's.

### PACKAGING

20kg bag; 56 bags per pallet.

### COLOUR

Grey.



## SPECIALISED ADHESIVE Continued

## LATAPOXY® 300 ADHESIVE

Refer to Data Sheet: DS-1047



A 100% solid, 3-part epoxy adhesive for chemical-resistant installations of quarry tile, porcelain, brick, and packing house tile. Superior strength and workability. Prevents curling of water-sensitive marbles and agglomerates. Will not stain white or light-coloured stone. Can be used for installing rubber and bond strip wood flooring and laminate flooring to many substrates. Meets and exceeds the requirements of AS ISO13007.1 and an R2 Adhesive.

### Approximate Coverage Per #2 unit (Based on product wet densities with a trowel at 45°)

NOTCH TROWEL	COVERAGE
1.5mm V-notch	16.7 – 18.6 m <sup>2</sup>
3mm x 3mm Square	8.4 – 10.2 m <sup>2</sup>
4mm V-notch	6.5 – 7.4 m <sup>2</sup>
6mm x 6mm Square	2.8 – 3.3 m <sup>2</sup>

### FEATURES/BENEFITS:

- Prevents curling of moisture-sensitive marbles and agglomerates
- For mesh mount glass mosaics and resin-backed tile and stone
- Will not stain white or light coloured marble
- Extra Heavy service ration per ASTM C627 (TCNA)
- Meets ANSI A118.3 AND AS ISO13007.1 classification.

### PACKAGING

**All components packed in one pail; 48 pails per pallet.**  
Makes 6.8 litres of adhesive.

## LATAPOXY® 310 STONE ADHESIVE

Refer to Data Sheet: DS-1042



A strong, two-component epoxy adhesive for spot-bonding large format tile and stone on vertical surfaces. Easier and faster than traditional methods of veneer installation.

### Approximate Coverage

MILLIMETRES OUT OF PLUMB	LATAPOXY® 310 STONE ADHESIVE THICKNESS	10 LITRE UNITS
Plumb Wall (3mm)	3mm	27 – 30 m <sup>2</sup>
6mm	6mm	14 – 16 m <sup>2</sup>
12mm	12mm	7 – 7.5 m <sup>2</sup>

### MIXING

Combine equal volumes of LATAPOXY® 310 Stone Adhesive Part A and LATAPOXY® 310 Stone Adhesive Part B (1:1)  
Do not mix more than approximately 0.5 litres of LATAPOXY 310 Rapid Stone Adhesive at a time.

### FEATURES/BENEFITS:

- For interior or approved exterior applications
- Non-sag consistency at high working temps up to 35 C
- Come in both standard and rapid version for faster curing
- No drilling, cutting kerfs, or setting pins
- Allows for quick plumb adjustment while stone is in place to compensate for uneven walls and stone thickness variations
- Won't deteriorate over time
- ANSI A118.3 and ISO 1337-1 R2T classification.

### PACKAGING

**RAPID: 5 litre of Part A and 5 litre of Part B.**

**10L Kit: 5 litre of Part A and 5 litre of Part B.**

Packed 1 kit per carton; 40 kits per pallet. Also available in a rapid set version.





# SPECTRALOCK® PRO PREMIUM GROUT

## Mini Kit

PARTS A & B LIQUIDS (4/Carton)  
41-S-225CQ-NS-00



PART C COLOUR POWDERS (4x1kg/Carton)  
41-12xx-0004-2



## Full Kit

FULL UNIT PARTS A & B LIQUIDS (Pail)  
41-S-225P1-NS-02



PART C COLOUR POWDER (1x4kg/Carton)  
41-12xx-0016-2



## Commercial Kit

COMMERCIAL PARTS A & B LIQUIDS (4/Carton)  
41-S-225P4-NS-04



4x PART C COLOUR POWDERS (4x4kg/Carton)  
41-12xx-0016-2



\*United States Patent No.: 6881768 (and other Patents). NOTE: SPECTRALOCK PRO Premium Grout Part C Colour powder required and sold separately.

## SPECTRALOCK® 2000 IG Commercial Unit #4

4x Resin Commercial Parts A & B Liquids #4  
41-S-2000P-SL-03



## LATAPOXY® SP-100 Commercial Unit #4

4x Resin Commercial Parts A & B Liquids #4  
41-S-100P4-NS-03



NOTE: SPECTRALOCK PRO Premium Grout Part C Colour powder required and sold separately.

## PERMACOLOR® SELECT^ POWDER AND COLOUR KIT

PERMACOLOR® SELECT - Colour Kit (2x100gm Pouches)  
41-26xx-1001-1



EACH COLOUR KIT CONTAINS TWO COLOUR PACKS

PERMACOLOR® SELECT - Base Powder (5kg Bag)  
41-2600-0405-2-M



5KG BASE POWDER MIXES WITH ONE COLOUR PACK

^United States Invention Patent.: 6,784,229 (and other Patents).

GROUTING MATERIAL

## SPECTRALOCK® PRO PREMIUM GROUT\*

Refer to Data Sheet: DS-1191



A patented, high performance epoxy grout which offers excellent colour uniformity, durability, stain protection, and beautiful, full grout joints in an easy to-use, non-sag formula. Classified as an RG when tested to AS ISO 13007.3.

### Approximate Coverage

Refer to Grout Coverage Chart on page 45

### FEATURES/BENEFITS:

- Improved non-sag formula
- Durable; maintains colour uniformity
- Easy to install; never needs sealing
- Stainproof†
- Can be used on floors and walls
- Working time = 80 minutes
- Exceeds AS IS13007.4 and ANSI A118.3 Standards.

### PACKAGING

**Mini Unit:** Liquid components, gloves, sponge, and cleaning packets packed in one pail 4 units per carton / 45 cartons per pallet

**Full Unit:** Equals four SPECTRALOCK® PRO Premium Grout Mini Units Liquid components, gloves, sponge, and cleaning packets packed in one pail 80 pails per pallet

**Commercial Unit:** Equals four SPECTRALOCK® PRO Premium Grout Full Units Liquid components, gloves, sponge, and cleaning packets packed in one carton 44 cartons per pallet.

NOTE: SPECTRALOCK PRO Premium Grout Part C Colour powder required and sold separately.

### COLOUR

See Grout and Sealant Colour chart on page 49 for a list of available colours.

Note: SPECTRALOCK® Grout Part C filler powder required; sold separately

\*United States Invention Patent No.: 6881768 (and other Patents).

† Stainproof (residential installations only) to common household cleaners, liquids and other goods. Clean all spills immediately.

## SPECTRALOCK® GROUT (PART C) POWDERS



Available in 40 colours and designed to be used with SPECTRALOCK® PRO Premium Grout\* Part AB liquids and SPECTRALOCK® 2000 IG Part A,B Liquids.

### Approximate Coverage

Refer to Grout Coverage Chart on page 45

### FEATURES/BENEFITS:

- Excellent colour uniformity
- Mould and mildew resistant
- Never needs sealing.

### PACKAGING

**Mini Unit: 1kg container;** 4 containers per carton; 126 cartons per pallet.

**Full Unit: 4kg x 1 container;** 44 cartons per pallet.

**Commercial Unit: 4 x 4kg container,** 4 containers per carton. 33 cartons per pallet.

**Note:** SPECTRALOCK® PRO Premium Grout\* Part A,B Liquids and SPECTRALOCK 2000 IG Part A,B Liquids required and sold separately.

### COLOUR

See grout colour chart on page 49 for a list of available colours.

\* United States Patent No.: 6881768 (and other Patents).

ROUTING MATERIAL

## SPECTRALOCK® GROUT DAZZLE™ (PART D) COMPONENT

Refer to Data Sheet: DS-1065



A unique design component, SPECTRALOCK® Grout DAZZLE Part D Component adds metallic and “Glow-In-The-Dark” enhancements to SPECTRALOCK® PRO Premium Grout\*. These high-end design elements offer limitless imaginative applications. Use SPECTRALOCK® DAZZLE on walls and floors. Add a metallic look to plain tile and stone. Accentuate metallic tiles, glass tiles, mosaics, stone and listellos with dazzling colour combinations. Use SPECTRALOCK® Grout DAZZLE Part D Component in your pools and spas; and use Glow in your bathrooms, hallways and entry ways. For use in interior and exterior applications on floors and walls.

### FEATURES/BENEFITS:

- Unlimited imaginative applications!
- Accentuates interior and exterior walls and floors, plain tile and stone, metallic tiles, glass tiles, mosaics, stone and listellos, pools and spas, bathrooms, hallways and entryways
- Available in 12 trendy colours.

### PACKAGING

1 x jar DAZZLE; 2 jars per carton

### COLOURS

Gold; Silver; Copper; Mother-of-Pearl; Lemonade; Limeade; Pretty in Pink; Tangerine Orange; Blue Hawaii; Purple Haze; Ruby Slipper; Candied Apple; Glow-in-the-Dark.

### MIXING

**Mini Unit:** 1 x jar DAZZLE

**Full Unit:** 4 x jar DAZZLE

**Commercial Unit** 16 x jar DAZZLE

\*United States Patent No.: 6881768 (and other Patents).

## PERMACOLOR® GROUT^

Refer to Data Sheet: DS-1041



PERMACOLOR® Grout is the top performing cement-based grout available. Provides consistent colour, and antimicrobial protection to resist stain-causing mould and mildew. PERMACOLOR® Grout is easy to install - just mix with water. Ideal for floors and wall in both interior and exterior applications. Meets and exceeds the requirements of AS ISO 13007.3 as a CG2WAF classification.

### Approximate Coverage

Refer to Grout Coverage Chart on page 45

### FEATURES/BENEFITS:

- Consistent colour
- Easy to install; just mix with water - no additive required
- Ideal for floors and walls (joint widths of 1.5mm to 12mm)
- Inhibits mould and mildew with antimicrobial protection
- Improved stain resistance for a cement based grout
- Interior and exterior applications.

### PACKAGING

**100 bags per pallet;** available in 20 colours

**4 x 5 kg bags per carton / 40 cartons per pallet;** available in 12 colours

### COLOUR

See colour chart on page 47 for a list of available colours.

^United States Invention Patent No.: 6,784,229 (and other Patents)

## PERMACOLOR® NS GROUT^

Refer to Data Sheet: DS-1252



PERMACOLOR® NS is an ultra-premium, factory prepared, polymer fortified, non-sanded cement-based grout designed for grout joints up to 6 mm, for use on highly delicate surfaces such as polished marble, soft glass and metals. Mix PERMACOLOR NS with water. This ultra-premium non-sanded grout, guarantees grout joints to be dense, hard and durable.

### Approximate Coverage

Refer to Grout Coverage Chart on page 45

### FEATURES/BENEFITS:

- Achieves ISO 13007.3 as a CG2FAW
- Contains anti-microbial technology
- Non sanded grout
- Excellent for wet and dry areas
- Non-dusting, non-spalling and non-yellowing
- Non-shrinking.

### PACKAGING

**4 x 5 kg bags per carton / 40 cartons per pallet;** available in 12 colours.

### COLOUR

See colour chart on page 48 for a list of available colours.

^United States Invention Patent No.: 6,784,229 (and other Patents)

ROUTING MATERIAL

# PERMACOLOR® SELECT<sup>^</sup>

Refer to Data Sheet: DS-1162



PERMACOLOR® SELECT is an advanced high performance cement grout that offers the industry's first dispersible dry pigment solution. Designed for virtually all types of residential and commercial installations and offers optimum performance on the most demanding exterior or interior applications. Easy to mix, grout and clean, PERMACOLOR® SELECT is fast setting and does not require sealing. Meets and exceeds the requirements of AS ISO13007.3 as a CG2FAW.

**Approximate Coverage**

Refer to Grout Coverage Chart on page 45

**FEATURES/BENEFITS:**

- Exceeds ANSI A118.7 and Achieves AS ISO 13007.3 CG2FAW
- Vibrant consistent colour—resists efflorescence
- Fast setting—ready for foot traffic in 3 hours.

**PACKAGING**

**Base Powder: 4 x 5kg bags per carton;**

40 cartons per pallet

**Colour Kit 2 x 100g pack;** 10 packs per carton; 85 cartons per pallet; available in 40 colours.

**COLOUR**

See colour chart on page 46 for a list of available colours.

<sup>^</sup>United States Invention Patent No.: 6,784,229 (and other Patents).

## PERMACOLOR® SELECT<sup>^</sup> Packaging Information

EACH COLOUR KIT CONTAINS TWO COLOUR PACKS



MIX 5KG BASE POWDER WITH ONE COLOUR PACK





COMMERCIAL GROUTING

## LATAPOXY® SP-100 LIQUID ONLY

Refer to Data Sheet: DS-1070



Recommended for commercial and swimming pool applications. Can also be used as a coloured tile adhesive for thin tile. Ideal for polyester pool shells. Meets and exceeds the requirements of AS ISO13007.3 as a RG Grout and AS ISO13007.1 and 2 as an R2 adhesive.

### Approximate Coverage

Refer to Grout Coverage Chart on page 45

### FEATURES/BENEFITS:

- Sag resistant — will not sag when used in wide joints up to 12mm
- Easy to apply — smooth and creamy
- Uniform colour — resists blotching
- Chemical resistant — 100% solids epoxy resists many acids, alkalis and corrosives
- Durable — will not peel, crack or powder
- Easy to use — no noxious odour, non-flammable, water cleanable, even with textured tile
- Can be used as a coloured epoxy adhesive.

### PACKAGING

**#4 Resin Unit: consists of 4 x 0.8kg Part A and 4 x 0.2kg Part B;** packed in a carton (sold as a unit); 70 cartons per pallet

**Note:** SPECTRALOCK Grout Part C filler powder required and sold separately.

## SPECTRALOCK® 2000 IG LIQUID ONLY

Refer to Data Sheet: DS-1041



New three-part, 100% solids epoxy grout specifically formulated for maximum chemical, stain, and temperature resistance. New non-sag formula is easy to install and clean. Recommended for industrial and commercial food processing applications as well as dairies, breweries, meat packing plants, Clean-In-Place rooms, veterinary hospitals, kennels and commercial kitchens. SPECTRALOCK® 2000 IG is unaffected by many acids, corrosives, and solvents. Easy to clean and fast curing, SPECTRALOCK 2000 IG is ideal for same day installations and ready for traffic in as little as 12 hours. When tested in accordance with AS ISO 13007.3 and 4 this product exceeds the requirements of a RG classification.

### Approximate Coverage

Refer to Grout Coverage Chart on page 45

### FEATURES/BENEFITS:

- Easy to install and clean
- Non-sag formula with 80 minute working time
- Improved chemical resistance
- Available in all LATICRETE grout colours except #44 Bright White — use SPECTRALOCK Grout Part C Powders.

### PACKAGING

**#4 Resin (Commercial Unit): consists of 4 x 0.5kg Part A and 4 x 1kg Part B;** packed in a carton (sold as a unit); 56 cartons per pallet.

**Note:** SPECTRALOCK Grout Part C filler powder required and sold separately.





## SEALANTS

## HYDRO BAN® FILLET & SEALANT

Refer to Data Sheet: DS-1196



HYDRO BAN® Fillet & Sealant is a one component, fast curing, hybrid elastomeric adhesive and sealant. This product is specifically formulated to meet today's Green Building Standards and has excellent adhesion on a wide variety of substrates. Particularly for use under HYDRO BAN® Waterproof Membrane as a transition fillet and crack filler.

### FEATURES/BENEFITS:

- Excellent adhesion on nearly ALL substrates including polystyrene
- Fast cure
- Excellent durability
- Superior flexibility
- Will NOT shrink or crack
- NO harmful components
- VOC compliant
- Contains no solvents or isocyanates.

### PACKAGING

**600ml sausage;** packed 20x sausages per carton.

## LATASIL™

Refer to Data Sheet: DS-1074



High performance, 100% silicone sealant designed for use in coves, corners, changes in plane and expansion joints in exterior and interior applications of tile and stone. Can be used in fountains, water features and other wet area applications. LATASIL™ conforms to ASTM C 920 and ASTM C 794 adhesion properties and inhibits the growth of stain-causing mould and mildew in sealant joints with antimicrobial product protection.

### FEATURES/BENEFITS:

- Use in swimming pools and other wet areas
- Conforms to ASTM C920 and ASTM C794 adhesion.

### PACKAGING

**305ml cartridge;** 6 cartridges per carton;  
240 cartons per pallet.

### COLOUR

See colour chart on page 49 for a list of available colours.





## GROUT COVERAGE CHARTS

**SPECTRALOCK® PRO PREMIUM GROUT<sup>^</sup>**COVERAGE APPROXIMATE M<sup>2</sup> (Coverage per full unit)

TILE SIZE	JOINT WIDTH					
	1.5mm	3mm	4.5mm	6mm	9mm	12mm
25 x 25 x 6mm	4.5	2.4	1.8	1.4	1.1	0.9
50 x 50 x 6mm	8.6	4.5	3.1	2.4	1.8	1.4
106 x 106 x 7.5mm	14.2	7.3	4.9	3.8	2.6	2.0
100 x 200 x 12mm	8.4	4.3	2.9	2.2	1.6	1.2
150 x 150 x 9mm	16.7	8.5	5.7	4.4	3.0	2.3
200 x 200 x 9mm	22.2	11.2	7.6	5.7	3.9	3.0
300 x 300 x 9mm	33.1	16.7	11.2	8.5	5.7	4.4
325 x 325 x 9mm	35.9	18.1	12.1	9.2	6.2	4.7
400 x 400 x 9mm	44.1	22.2	14.9	11.2	7.6	5.7
450 x 450 x 9mm	49.6	24.9	16.7	12.6	8.5	6.4
600 x 600 x 9mm	66.0	33.1	22.2	16.7	11.2	8.5

**SPECTRALOCK® 2000 IG**COVERAGE APPROXIMATE M<sup>2</sup> (Coverage per #4 unit)

TILE SIZE	JOINT WIDTH		
	6mm	9mm	12mm
100 x 200 x 12	14.7	10.1	7.8
100 x 200 x 30	5.9	4.1	3.1
150 x 150 x 12	16.4	11.2	8.7

**LATAPOXY® SP-100**COVERAGE APPROXIMATE M<sup>2</sup>

TILE SIZE	JOINT WIDTH					
	1.5mm	3mm	4.5mm	6mm	9mm	12mm
25 x 25 x 6mm	5.0	2.7	1.9	1.6	1.2	1.0
50 x 50 x 6mm	9.5	5.0	5.0	2.7	1.9	1.6
106 x 106 x 7.5mm	15.8	8.1	5.5	4.2	2.9	2.3
115 x 240 x 10mm	17.3	8.8	5.9	4.5	3.1	2.4
150 x 150 x 9mm	18.5	9.4	6.4	4.8	3.3	2.6
200 x 200 x 9mm	24.6	12.4	8.4	6.4	4.3	3.3
300 x 300 x 9mm	36.7	18.5	12.4	9.4	6.4	4.8
300 x 300 x 12mm	27.5	13.9	9.3	7.0	4.8	3.6

**COVERAGE NOTES**

Calculated coverage indicated is approximate, based on "nominal" tile size and is provided for purposes of estimation only. Actual coverage will vary depending on job site conditions, actual tile size and installed grout joint size. Add 10% for waste, spillage and clean-up, and another 10% – 15% when grouting unglazed quarry tile.

**PERMACOLOR® SELECT\***COVERAGE APPROXIMATE M<sup>2</sup> (Coverage per 5kg bag)

TILE SIZE	JOINT WIDTH					
	1.5mm	3mm	6mm	9mm	12mm	
25 x 25 x 6	4.8	2.6	1.5	1.1	1.0	
50 x 50 x 6	9.1	4.8	2.6	1.9	1.5	
100 x 100 x 8	13.4	6.8	3.6	2.5	1.9	
200 x 200 x 9	23.5	11.9	6.1	4.1	3.2	
300 x 300 x 9	35.1	17.7	9.0	6.1	4.6	
400 x 400 x 9	46.8	23.5	11.9	8.0	6.1	
450 x 450 x 9	52.6	26.4	13.3	9.0	6.8	
600 x 600 x 9	70.0	35.1	17.7	11.9	9.0 w	

**PERMACOLOR® GROUT**COVERAGE APPROXIMATE M<sup>2</sup> (Coverage per 10kg bag)

TILE SIZE	JOINT WIDTH					
	1.5mm	3mm	4.5mm	6mm	9mm	12mm
25 x 25 x 6mm	10.2	5.3	3.6	2.8	2.0	1.6
50 x 50 x 6mm	20.1	10.2	6.9	5.3	3.6	2.8
106 x 106 x 7.5mm	33.8	17	11.4	8.6	5.8	4.4
150 x 150 x 9mm	39.8	20.0	13.4	10.1	6.8	5.2
200 x 200 x 9mm	53.0	26.6	17.8	13.4	9.0	6.8
300 x 300 x 9mm	79.4	39.8	26.6	20.0	13.4	10.1
325 x 325 x 9mm	86.0	43.1	28.8	21.6	14.5	10.9
400 x 400 x 9mm	105.8	53.0	35.4	26.6	17.8	13.4
425 x 425 x 9mm	112.4	56.3	37.6	28.2	18.9	14.2
600 x 600 x 9mm	158.6	79.4	53.0	39.8	26.6	20.0

**PERMACOLOR® NS GROUT**COVERAGE APPROXIMATE M<sup>2</sup> (Coverage per 5kg bag)

TILE SIZE	JOINT WIDTH			
	1.5mm	3mm	4.5mm	6mm
25 x 25 x 6	4.3	2.3	1.7	1.4
50 x 50 x 6	8.3	4.3	3.0	2.3
100 x 100 x 12	8.1	4.1	2.8	2.2
150 x 150 x 9	16.1	8.2	5.5	4.2
200 x 200 x 9	21.4	10.8	7.3	5.5
300 x 300 x 9	32.0	16.1	10.2	8.2
325 x 325 x 9	34.6	17.4	11.7	8.8
400 x 400 x 9	42.6	21.4	14.3	10.8
425 x 425 x 9	45.2	22.7	15.2	11.5
600 x 600 x 9	63.7	32.0	21.4	16.1

[Click here to Download the LATICRETE® Coverage Calculator](#)

# PRODUCT INFORMATION PERMACOLOR® Select\*



## Packaging and Available Colours:

PERMACOLOR Select Base: 4 x 5kg bags per carton

Colour kits: 2 x 100g pack.

\*United States Invention Patent No.: 6,784,229 (and other Patents)



				
44 Bright White	18 Sauterne	16 Siltstone	85 Almond	03 Silk
				
23 Antique White	39 Mushroom	41 Kashmir	81 Butter Cream	52 Toasted Almond
				
55 Tawny	17 Marble Beige	40 Latte	61 Parchment	30 Sand Beige
				
56 Desert Khaki	38 River Rock	27 Hemp	57 Hot Cocoa	92 Saltillo
				
58 Terra Cotta	46 Quarry Red	43 Chocolate Truffle	66 Chestnut Brown	59 Espresso
				
35 Mocha	50 Sea Glass	67 Autumn Green	53 Twilight Blue	42 Platinum
				
91 Slate Grey	88 Silver Shadow	89 Smoke Grey	90 Light Pewter	78 Sterling Silver
				
24 Natural Grey	34 Sandstone	60 Dusty Grey	45 Raven	22 Midnight Black

# PRODUCT INFORMATION PERMACOLOR® Grout\*

## Packaging and Available Colours:

- PERMACOLOR 4 x 5kg: Available in 12x colours, packed in 4 x 5kg bags per carton
- ★ PERMACOLOR 10kg: Available in 20x colours, packed in a 10kg bag.

\*United States Invention Patent No.: 6,784,229 (and other Patents)



44 Bright White ★ ●	18 Sauterne ★ ●	85 Almond ★	03 Silk ★
23 Antique White ★	39 Mushroom ★	17 Marble Beige ★	40 Latte ★
50 Sea Glass ★	53 Twilight Blue ★	42 Platinum ★ ●	91 Slate Grey ★ ●
88 Silver Shadow ★ ●	89 Smoke Grey ★ ●	90 Light Pewter ★ ●	78 Sterling Silver ★ ●
24 Natural Grey ★ ●	60 Dusty Grey ★ ●	45 Raven ★ ●	22 Midnight Black ★ ●

# PRODUCT INFORMATION

# PERMACOLOR® NS Grout\*


## Packaging and Available Colours:

Available in 12x colours,  
packed in 4 x 5kg bags per carton.

\*United States Invention Patent No.: 6,784,229 (and other Patents)



44 Bright White



18 Sauterne



42 Platinum




91 Slate Grey



88 Silver Shadow



89 Smoke Grey



90 Light Pewter



78 Sterling Silver



24 Natural Grey



60 Dusty Grey



45 Raven



22 Midnight Black



# PRODUCT INFORMATION

## Epoxy Grouts and Sealant

SPECTRALOCK® PRO Premium Grout\* is a patented, high performance epoxy grout which offers excellent colour uniformity, durability, stain protection, and beautiful, full grout joints in an easy to-use, non-sag formula.

### LATICRETE® Epoxy Grouts and Sealant:

• SPECTRALOCK PRO Premium Grout\* • SPECTRALOCK 2000 IG • LATASIL™ Sealant

#### Grout and Sealant Selection Key

##### Available in All 40 Colours:

SPECTRALOCK PRO Premium  
SPECTRALOCK 2000 IG (not available in Bright White)  
LATAPOXY® SP-100

##### Available in Selected Colours:

- SPECTRALOCK DAZZLE GLOW
- LATASIL™ Sealant
- ◆ SPECTRALOCK 2000 IG (not available in Bright White)

				
44 Bright White ■ ● ◆	18 Sauterne ■ ●	16 Siltstone ■	85 Almond ■ ●	03 Silk ■ ●
				
23 Antique White ■ ●	39 Mushroom ■ ●	41 Kashmir ■	81 Butter Cream ■	52 Toasted Almond ■
				
55 Tawny	17 Marble Beige ■ ●	40 Latte ■ ●	61 Parchment ■	30 Sand Beige
				
56 Desert Khaki ■	38 River Rock ■	27 Hemp	57 Hot Cocoa	92 Saltillo
				
58 Terra Cotta	46 Quarry Red	43 Chocolate Truffle	66 Chestnut Brown	59 Espresso
				
35 Mocha ●	50 Sea Glass ■	67 Autumn Green	53 Twilight Blue ●	42 Platinum ●
				
91 Slate Grey ●	88 Silver Shadow ■ ●	89 Smoke Grey	90 Light Pewter ■ ●	78 Sterling Silver ■ ●
				
24 Natural Grey ●	34 Sandstone	60 Dusty Grey ●	45 Raven ●	22 Midnight Black ●
				
Clear ●				

SPECTRALOCK PRO Premium Grout is available in 40 colours. Use the Grout Selection Key for the other products. SPECTRALOCK DAZZLE (Gold, Silver, Copper and Mother-of-Pearl etc) can be mixed with the 40 colours of SPECTRALOCK PRO Premium Grout.

CONCRETE HARDENER/ DENSIFIER

**SEAL HARD®**

Refer to Data Sheet: DS-1195



A concrete densifier that increases the strength and wear resistance of concrete floors surfaces subjected to pedestrian and vehicle traffic. SEAL HARD penetrates concrete to seal, dustproof, densify, and harden the surface and reduce absorptiveness. SEAL HARD increases the service life of concrete floors and resist dusting for years after application. SEAL HARD leaves no film and will not alter the natural, high traction texture of the concrete floor. Additionally, SEAL HARD treated floors provide a significant savings in maintenance costs over conventional acrylic, epoxy, and urethane sealers.

**FEATURES/BENEFITS:**

- Dramatic long-term maintenance cost reduction
- Safe, non-slip, certified high traction
- Zero VOC/Odorless
- Formulated to resist dusting
- Creates a protective hardened and sealed surface.

**PACKAGING**


**20 L Pail; 200 L Drum.**

**Approximate Coverage**

First coat: 5 m<sup>2</sup>/Litre

Additional coats may be necessary under certain porous conditions.  
Apply second coat after first coat has completely dried.

Second coat: 8.5 m<sup>2</sup>/Litre

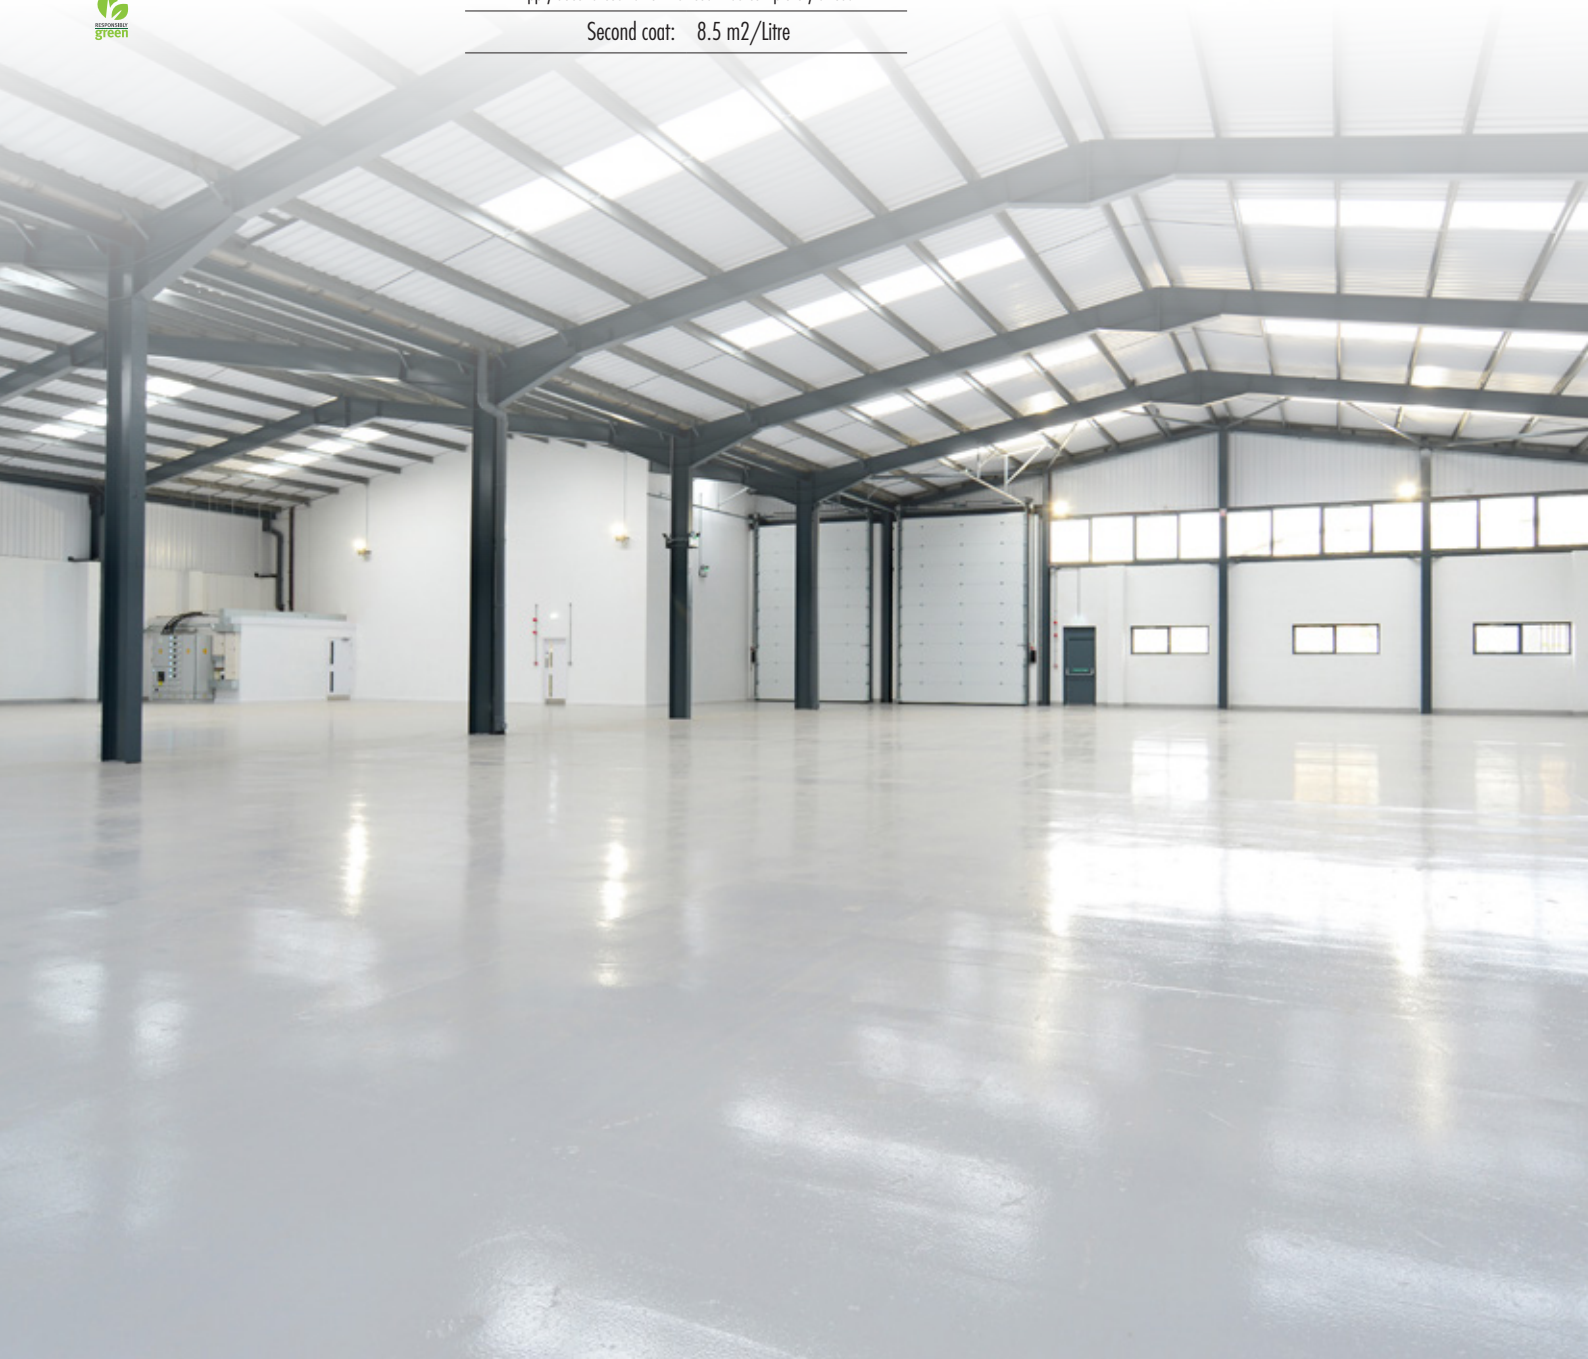



LATICRETE® offers a professional and retail line of care and maintenance products for tile, natural stone, grout, and masonry surfaces. EACH RANGE PROVIDES UNIQUE natural-look sealers, enhancing sealers and specialised cleaners.

Whether it's natural stone, tile, grout or another type, if your surface has some porosity it can stain with water, oil and food-based liquids. Natural-look sealers protect but do not alter the surface. All-in-one enhancing sealers darken and/or add a desired shine all while protecting the surface. Specialised cleaners in a range of daily and heavy duty cleaning solutions can help to remove stains without damaging the surface.

## PROTECT RANGE

PROTECT natural stone, tile or grout with STONETECH® Surface Care Product range means you are protecting loved ones, the environment and your investment all at the same time.

Majority of the STONETECH range of protective sealants is water-based ensuring high performance and heavy duty protection, but more importantly, producing low VOC's and minimal odour. The environmentally friendly sealers protect against stains such as water, oils and other liquids and make cleaning up easy.

### STONETECH® BULLETPROOF® SEALER

Refer to Data Sheet: DS-1198



The premium, water-based penetrating sealer, designed to provide maximum protection against the toughest oil and water-based stains on the most porous natural stone, tile, masonry, and grout surfaces.

#### Recommended Surfaces:

For porous natural stone, tile, masonry and grout such as Marble, Granite, Basalt, Limestone, Bluestone, Travertine, Sandstone, Flagstone, Quartzite, and Saltillo Tile. Best suited for the most porous stone surfaces.

#### FEATURES/BENEFITS:

- Offers maximum stain protection
- Built with Microban® antimicrobial technology<sup>®</sup> - the sealer continuously inhibits the growth of bacteria, mould and mildew on the sealed surface
- Best protection for the most porous natural stone, tile, masonry and grout
- Preserves the original look of the surface
- Water-based formula - better for you and the environment
- For interior and exterior use
- Professional grade.

#### PACKAGING

946ml, 3.8L; 18.9L.

### STONETECH® HEAVY DUTY SEALER

Refer to Data Sheet: DS-1197



The heavy duty, water-based penetrating sealer that provides advanced stain protection on a variety of stones, all while preserving the natural look of the stone.

#### Recommended Surfaces:

Natural stone and masonry surfaces such as Marble, Granite, Limestone, Slate, Bluestone, Quartzite, Travertine, Sandstone, Flagstone, and Saltillo Tile.

#### FEATURES/BENEFITS:

- Offers advanced stain protection
- Built with Microban® antimicrobial technology<sup>®</sup> - the sealer continuously inhibits the growth of bacteria, mould and mildew on the sealed surface
- Protects natural stone, tile, masonry, and grout
- Preserves the original look of the surface
- Water-based formula - better for you and the environment
- For internal and exterior use
- Professional grade.

#### PACKAGING

946ml, 3.8L; 18.9L.

PROTECT RANGE

## STONETECH® STONE, TILE AND GROUT SEALER

Refer to Data Sheet: DS-1246



The water-based, penetrating sealer that protects against stains on natural stone, tile, masonry and grout.

**Recommended Surfaces:**

Natural stone such as Polished Marble, Homogeneous Granite, Polished Limestone, Slate, and Polished Travertine.

**FEATURES/BENEFITS:**

- Offers stain protection
- Protects natural stone, tile, masonry, and grout
- Preserves the original look of the surface
- Water-based formula - better for you and the environment
- For internal and exterior use.

**PACKAGING**

**946ml; 3.8L.**

## STONETECH® IMPREGNATOR PRO® SEALER

Refer to Data Sheet: DS-1202



The solvent based, penetrating sealer that provides advanced stain protection on natural stone, tile, masonry, and grout surfaces.

**Recommended Surfaces:**

Natural stone such as Granite, Limestone, Slate, Bluestone, Travertine, and Sandstone.

**FEATURES/BENEFITS:**

- Offers advanced stain protection
- Protects natural stone, tile, masonry, and grout
- Preserves the original look of the surface
- Solvent-based formula
- For interior and exterior use
- Professional grade.

**PACKAGING**

**3.8L; 18.9L.**

May be subject to Volatile Organic Compound sales restrictions at the state, county and/or city level. Please see [www.laticrete.com.au](http://www.laticrete.com.au)

## STONETECH® SALT WATER-RESISTANT SEALER

Refer to Data Sheet: DS-1209



The water-based, penetrating sealer formulated to protect exterior surfaces from salt degradation due to salt water and de-icing salt exposure.

**Recommended Surfaces:**

Best suited for porous substrates. Treatment around salt water pools: Natural Stone, Porous Tile, Concrete Pavers, Terracotta, and Grout. Protection against de-icing salts: Poured Concrete, Aggregate, Pavers, and Flagstone. Not intended for use on surfaces that have previously been exposed to salt water and/or de-icing salts.

**FEATURES/BENEFITS:**

- Maximum protection against salt water and de-icing salt damage
- Protects porous natural stone, masonry and grout
- Weather and UV-resistant
- Water-based formula - better for you and the environment
- For exterior use.

**PACKAGING**

**3.8L; 18.9L.**

PROTECT RANGE

## STONETECH® HEAVY DUTY EXTERIOR SEALER

Refer to Data Sheet: DS-1199



The solvent based sealer designed for exterior surfaces offers advanced stain protection and weather resistance on natural stone, masonry and grout.

**Recommended Surfaces:**

Natural stone and masonry surfaces such as Granite, Slate, Travertine, Sandstone, Tumbled Stone, and Concrete.

**FEATURES/BENEFITS:**

- Advanced protection against water-based stains
- Protects natural stone, masonry, and grout
- Minimizes efflorescence and repels water
- Provides weather resistance
- Solvent-based formula
- For exterior use.

**PACKAGING**

**946ml; 3.8L; 18.9L.**

May be subject to Volatile Organic Compound sales restrictions at the state, county and/or city level. Please see [www.laticrete.com.au](http://www.laticrete.com.au)

## STONETECH® HEAVY DUTY GROUT SEALER

Refer to Data Sheet: DS-1244



The water-based, penetrating sealer is designed specifically for cement-based grouts and offers advanced protection against oil and water-based stains.

**Recommended Surfaces:**

Cement-based grout for Natural Stone, Ceramic, and Porcelain Tile.

**FEATURES/BENEFITS:**

- Offers advanced protection against oil and water based stains
- Keeps grout looking newer longer
- Improves clean-ability
- Water-based formula - better for you and the environment
- For interior and exterior use.

**PACKAGING**

**946ml.**

## STONETECH® GROUT RELEASE

Refer to Data Sheet: DS-1243



The easy-to-use, pre-grout coating that offers maximum protection on natural stone and masonry to prevent grout stains and haze, making grout installation clean-up quick and easy.

**Recommended Surfaces:**

Natural stone, masonry and concrete such as Marble, Limestone, Travertine, Slate, Sandstone, and Tumbled Stone. Not recommended for use on ceramic and porcelain tile or dense (low absorbency) stone.

**FEATURES/BENEFITS:**

- Maximum protection against salt water and de-icing salt damage
- Protects porous natural stone, masonry and grout
- Weather and UV-resistant
- Water-based formula - better for you and the environment
- For interior and exterior use.

**PACKAGING**

**3.8L; 4 bottles per pallet.**

- **ADVANCED GROUT SEALER:** 12 x 383G (Aerosol) can



CLEAN RANGE

The CLEAN range of STONETECH® Surface Care Products are unlike everyday household cleaners that contain harsh and abrasive ingredients.

Our gentle environmentally friendly, water-based, easy to use formula has been designed to care for natural stone and tile on a daily basis.

The heavy duty range is designed for tougher jobs but still offers the same water-based, environmentally friendly formula.

**STONETECH® EPOXY GROUT HAZE AND COATING STRIPPER**

Refer to Data Sheet: DS-1247



The fast-acting, water-based gel that dissolves epoxy grout haze and tough coatings in minutes.

**Recommended Surfaces:**

Natural stone, tile, masonry surfaces such as granite, marble, limestone, bluestone, travertine, sandstone, slate, flagstone, quartzite, concrete, saltillo tile, quarry tile, ceramic tile and porcelain tile. Not for use on highly sensitive marbles.

**FEATURES/BENEFITS:**

- For natural stone, tile and masonry
- Eliminates epoxy grout haze in 10 minutes or less
- Removes epoxy grout haze and tough coatings — varnish, lacquer, sealer, wax, paint, polyurethane, and acrylic
- Fast-acting, non-runny gel — great for vertical and horizontal applications
- Water-based formula
- Low odour, low VOC and non-flammable
- No Methylene Chloride.

**PACKAGING**

946ml; 3.8L.

**STONETECH® REVITALIZER CLEANER AND PROTECTOR**

Refer to Data Sheet: DS-1207



STONETECH® Revitalizer® Cleaner and Protector is an all-in-one formula that cleans everyday messes, all while reinforcing protection.

**Recommended Surfaces:**

Natural stone and grout such as Marble, Granite, Limestone, Travertine, Quartzite, Slate, Sandstone, and Flagstone.

**FEATURES/BENEFITS:**

- 2-in-1 cleaner and sealer — cleans everyday messes while saving time of resealing
- Built with Microban® antimicrobial technology<sup>®</sup> - the sealer continuously inhibits the growth of bacteria, mould and mildew on the sealed surface
- Built-in sealer reinforces stain protection
- Gentle water based formula
- Makes surfaces easier to clean
- Leaves a pleasant fragrance — in citrus or cucumber scent
- Available in ready-to-use or concentrate formulas.

**PACKAGING**

3.8L; 18.9L.





CLEAN RANGE

## STONETECH® STONE AND TILE CLEANER

Refer to Data Sheet: DS-1203



The daily, pH neutral, water-based cleaner, formulated to remove tough everyday spills, dirt and grease on natural stone, tile, masonry, and grout without degrading the surface.

**Recommended Surfaces:**

Natural stone, masonry, tile and grout such as Marble, Granite, Limestone, Travertine, Quartzite, Slate, Sandstone, Flagstone, Concrete, Ceramic Tile, and Porcelain Tile.

**FEATURES/BENEFITS:**

- Daily cleaner — cleans everyday messes
- Neutral pH formula — gently cleans without degrading natural stone, tile, and grout
- Leaves a clean fresh scent
- Better indoor air quality
- Available in ready-to-use or concentrate formulas.

**PACKAGING**

946ml; 3.8L.

## STONETECH® MOLD AND MILDEW STAIN REMOVER

Refer to Data Sheet: DS-1267



The ready-to-use, water-based specialty cleaner that removes unsightly mould and mildew stains from natural stone, tile, masonry, and grout.

**Recommended Surfaces:**

Natural stone, tile, masonry and grout surfaces such as Marble, Granite, Limestone, Travertine, Slate, Ceramic Tile, Porcelain Tile, Glass Tile, Brick, and unpolished poured Concrete slabs.

**FEATURES/BENEFITS:**

- Eliminates unsightly mould and mildew stains
- For natural stone, tile, masonry, and grout
- Won't degrade stone or grout
- Leaves a fresh, clean scent
- Foaming action sprayer — clings onto surface to avoid drips
- No VOC.

**PACKAGING**

709ml.

## STONETECH® SOAP SCUM REMOVER

Refer to Data Sheet: DS-1266



The ready-to-use, water-based powerful specialty cleaner formulated to remove soap scum, hard water stains, and dirt from natural stone, tile, and grout.

**Recommended Surfaces:**

Natural stone and tile surfaces such as Marble, Granite, Limestone, Travertine, Slate, Ceramic Tile, Porcelain Tile, and Glass Tile.

**FEATURES/BENEFITS:**

- Eliminates stubborn soap scum, hard water stains, and dirt
- For natural stone, tile, and grout
- Spray on foam, cleans, and shines
- Leaves a fresh, clean scent
- No VOC — better indoor air quality.

**PACKAGING**

709ml.

CLEAN RANGE

**STONETECH®**  
**KLENZALL™ CLEANER**

Refer to Data Sheet: DS-1204



The heavy duty strength, water-based alkaline cleaner made to remove the toughest dirt, grease and grime on natural stone, tile, masonry, and grout.

**Recommended Surfaces:**

Natural stone, tile, masonry and grout surfaces such as Marble, Granite, Limestone, Travertine, Quartzite, Slate, Sandstone, Flagstone, Concrete, Ceramic Tile, and Porcelain Tile.

**FEATURES/BENEFITS:**

- For natural stone, tile, masonry, and grout
- Removes tough dirt, grease, and grime
- Cleans, degreases, and prepares surface for resealing
- Safe on stone, will not etch
- Water-based, alkaline formula
- Ready-to-use or concentrate formulas.

**PACKAGING**

946ml; 3.8L; 18.9L

**STONETECH®**  
**OIL STAIN REMOVER**

Refer to Data Sheet: DS-1208



The ready-to-use, solvent-based problem solving solution to removing deep-set oil-based stains from natural stone, masonry, and grout.

**Recommended Surfaces:**

Natural stone, masonry and cementitious grout such as Marble, Granite, Limestone, Travertine, Quartzite, Slate, Sandstone, and Concrete.

**FEATURES/BENEFITS:**

- For natural stone, masonry, and grout
- Pulls out deep-set oil and grease stains
- Ready-to-use, just stir and apply
- Leaves no permanent residue.

**PACKAGING**

473ml can.



**TRANSFORM RANGE**

The Transform range of STONETECH® Surface Care Products enable you to go beyond protecting and cleaning natural stone. This range allows you to alter the look of stone, whether by enhancing the colour, polishing or shining the stone or adding a gloss finish. Stone restoration is also achieved with our full line of professional products that can bring the surface back to life.

**STONETECH®  
ENHANCER PRO™  
SEALER**

Refer to Data Sheet: DS-1201



The colour enhancing, solvent-based penetrating sealer that provides a maximum deep rich colour and stain protection on natural stone, masonry, and grout.

**Recommended Surfaces:**

Natural stone, masonry and grout such as Bluestone, Slate, Travertine, Sandstone, Limestone, Flagstone, Textured Stone, Flamed Stone, and Tumbled Stone.

**FEATURES/BENEFITS:**

- Deepens colour of porous natural stone, masonry, and grout
- Maximum stain protection — no gloss
- For interior and exterior use
- Weather and UV resistant
- Solvent-based formula
- Professional grade.

**PACKAGING**

**946ml, 3.8L; 18.9L.**

May be subject to Volatile Organic Compound sales restrictions at the state, county and/or city level. Please see [www.laticrete.com](http://www.laticrete.com) for further guidance.

**STONETECH®  
HONING POWDER**

Refer to Data Sheet: DS-1210



The professional grade, solvent-based stone restoration honing powders that eliminate mild to deep scratches and create even honed finishes. Available in extra fine to coarse grits.

**Recommended Surfaces:**

Natural stone such as most Marble, Limestone, Travertine, and Terrazzo.

**FEATURES/BENEFITS:**

- Creates an even, honed, flat finish
- Prepares stone for polishing and shining
- Available in 180, 280, 400, 600, and 800 grit levels
- Different grits eliminate mild to deep scratches
- Non-acidic for natural stone and terrazzo
- Designed for professional use.

**PACKAGING**

Honing Powder 180: **6x850G Canister**

Honing Powder 280: **6x850G Canister**

Honing Powder 400: **6x850G Canister**

Honing Powder 600: **6x850G Canister**

Honing Powder 800: **6x850G Canister**



SUBSTRATES

Category	Product <sup>1</sup>	Concrete	Portland Cement Mortar Bed	Ceramic Tile <sup>6</sup>	Masonry
<b>PRIMERS</b>	PRIME'N'BOND	I	I	I	I
<b>UNDERLAYMENTS</b>	PRIMER <sup>-5</sup>	I	I	I	I
	LEVEL <sup>-5</sup>	I	I	I	I
<b>MOSITURE SHIELD</b>	LATAPOXY Moisture Shield	E	E	E	E
	HYDRO BAN SLURRY	E	E	E <sup>3</sup>	E
<b>WATERPROOFING MEMBRANE</b>	HYDRO BAN	E	E	E <sup>3</sup>	E
	HYDRO BAN Filler & Sealant	E	E	E	E
<b>EPOXY ADHESIVES</b>	LATAPOXY 300 Adhesive <sup>^</sup>	E	E	E	E
	LATAPOXY SP-100	E	E	E	E
<b>SPOT BONDING ADHESIVES</b>	LATAPOXY 310 Stone Adhesive <sup>‡</sup>	E <sup>†</sup>	N	I	E <sup>†</sup>
	LATAPOXY 310 Rapid Stone Adhesive <sup>‡</sup>	E <sup>†</sup>	N	I	E <sup>†</sup>
<b>SLURRY BOND COATS</b>	4237 Latex Additive w/ 211	E	E	E	E
	3701 Mortar Admix w/ 211	E	E	E	E
	335 Adhesive	E	E	E	E
	254 Adhesive	E	E	E	E
<b>THICK-BED MORTAR</b>	3701 Mortar Admix w/ 226 Thick Bed Mortar	E	E	E	E
	3701 Fortified Mortar Bed	E	E	E	E
<b>UNCOUPLING</b>	STRATA_MAT <sup>-</sup>	E	E	E	E
<b>SOUND CONTROL/ CRACK SUPPRESSION</b>	125 TRI MAX	I	I	I	I
	LATICRETE SOUND CONTROL UNDERLAYMENT <sup>-</sup>	I	I	I	I
	LATACOUSTIC Sound Control	I	I	I	I
<b>MEDIUM-BED ADHESIVES</b>	Masonry Veneer Mortar	E	E	N	E
	4237 Latex Additive w/ 211	E	E	E	E
	101 Rapid Latex Admix w/ 315	E	E	E	E
<b>RAPID SETTING ADHESIVES</b>	101 Rapid Latex Admix w/ 315	E	E	E	E
	335 RAPID Adhesive	E	E	E	E
	4237 RAPID Latex Additive w/ 211	E	E	E	E
<b>MULTIPURPOSE THIN-SET ADHESIVES</b>	4237 Latex Additive w/ 211 or 315	E	E	E	E
	LATAFLEX Gold Adhesive <sup>2</sup>	E	E	I	E
	MULTIFLEX Adhesive <sup>2</sup>	E	E	N	E
	Ultra X8	E	E	N	E
	335 Adhesive	E	E	E	E
	254 Adhesive	E	E	E	E
<b>MULTIPURPOSE LIGHT WEIGHT THIN-SET ADHESIVES</b>	335 LITE Adhesive	E	E	E	E
	257 Titanium Adhesive	E	E	E	E
	125 TRIMAX	I	I	I	I
<b>DISPERSION ADHESIVES</b>	Multimastic Premium Adhesive	I	I	N	I
<b>COLOURED ADHESIVES</b>	4237 Latex Additive w/ PERMACOLOR Grout	E	E	E	E
	254 Adhesive (white) w/ PERMACOLOR Select Pigment Pack	E	E	E	E
	257 Titanium Adhesive (white) w/ PERMACOLOR Select Pigment Pack	E	E	E	E
	LATAPOXY SP-100	E	E	E	E
<b>MASONRY VENEER INSTALLATION</b>	Masonry Veneer Mortar	E	E	N	E

E Recommended for exterior and interior applications.  
 I Recommended for interior applications only.  
 N Not recommended for these applications.  
<sup>‡</sup> Wall installations only

<sup>-</sup> Horizontal use only.  
<sup>^</sup> Do not use on exterior facades or building envelopes.  
<sup>†</sup> Consult LATICRETE Technical Services Department.

<sup>1</sup> Consult Product Data Sheet before use.  
<sup>2</sup> Exterior use limited to residential and light commercial installations that are not continuously submerged.  
<sup>3</sup> Skim coat existing ceramic tile, stone or Portland cement terrazzo with an approved thin-bed adhesive first.

<sup>4</sup> Use as an unbonded, wire-reinforced mortar bed over cleavage membrane as per AS3958.  
<sup>5</sup> See TDS1230 for preparation.  
<sup>6</sup> Refer to TDS1135.  
<sup>7</sup> Bond with LATAPOXY 300.

Substrate	Cement Backer Board	Cement Terrazzo <sup>6</sup>	Exterior Glue Plywood	Resilient Flooring <sup>6</sup>	Gypsum Wallboard	Hi-Pressure Laminate	Steel	Polyester	DS Reference
I	I	I	I	I	I	I	N	I	DS-1258
I	I	I	I	I	N	N	N	N	DS-1236
I	I	I	I	I	N	N	N	N	DS-1234
E	E	E	I	N	I	N	E	E	DS-1176
E	E	E <sup>3</sup>	I	N	I	N	N	N	DS-1259
E	E	E <sup>3</sup>	I	N	I	N	N	N	DS-1036
E	E	E	I	I	I	I	E	E	DS-1196
E	E	E	I	I	I	I	E	E	DS-1047
E	E	E	I	I	I	I	E	E	DS-1070
I	N	I	I	N	N	N	I <sup>1</sup>	N	DS-1086
I	N	I	I	N	N	N	I <sup>1</sup>	N	DS-1042
E	E	E	N	N	N	N	N	N	DS-1079/DS-1064
E	E	E	N	N	N	N	N	N	DS-1046/DS-1064
E	E	E	N	N	N	N	N	N	DS-1037
E	E	E	N	N	N	N	N	N	DS-1166
E	E	E	I <sup>4</sup>	I <sup>4</sup>	N	I <sup>4</sup>	E <sup>4</sup>	E <sup>4</sup>	DS-1046/DS-1063
E	E	E	I <sup>4</sup>	I <sup>4</sup>	N	I <sup>4</sup>	E <sup>4</sup>	E <sup>4</sup>	DS-1000
E	E	E	I	I	N	N	E <sup>7</sup>	E <sup>7</sup>	DS-1134
I	I	I	I	N	N	N	N	N	DS-1255
I	I	I	I	N	N	N	I <sup>7</sup>	I <sup>7</sup>	DS-1250
I	I	I	I	N	N	N	I <sup>7</sup>	I <sup>7</sup>	DS-1061/DS-1062
E	N	E	N	N	I	N	N	N	DS-1076
E	E	E	N	N	I	N	N	N	DS-1079/DS-1064
E	E	E	N	N	I	N	N	N	DS-1071/DS-1050
E	E	E	N	N	I	N	N	N	DS-1071/DS-1050
E	E	E	N	N	I	N	N	N	DS-1002
E	E	E	N	N	I	N	N	N	DS-1080/DS-1064
E	E	E	N	N	I	N	N	N	DS-1079/DS-1064
E	I	I	I	N	I	N	N	N	DS-1040
E	N	E	N	N	I	N	N	N	DS-1053
E	N	E	N	N	I	N	N	N	DS-1038
E	E	E	N	N	I	N	N	N	DS-1037
E	E	E	I	I	I	I	N	N	DS-1166
E	E	E	N	N	I	N	N	N	DS-1275
E	E	E	I	I	I	I	N	N	DS-1278
I	I	I	I	N	N	N	N	N	DS-1255
I	N	I	I	N	I	N	N	N	DS-1055
E	E	E	N	N	I	N	N	N	DS-1079/DS-1041
E	E	E	I	I	I	I	N	N	DS-1166/DS-1245
E	E	E	I	I	I	I	N	N	DS-1278/DS-1245
E	E	E	I	I	I	I	E	E	DS-1070
E	N	E	N	N	I	N	N	N	DS-1076

- All surfaces need to be structurally sound and clean; free of dust, laitance, dirt, oil, grease, wax, sealers, curing compounds and anything that may inhibit bond. Floor systems over which tile or stone will be installed shall be in conformance with the The National Construction Code, AS3958 or applicable building codes.
- Concrete must be 28 days old with 7 day damp cure. However Latex Portland cement adhesives and mortars do not require a minimum cure for cement slabs.
- For tiling existing resilient flooring, ceramic tile, terrazzo, and non-water soluble cutback adhesive; see LATICRETE Technical Data Sheet TDS1135; Ceramic Tile & Stone Over Existing Wall & Floor Surfaces.
- For tiling to plywood and timber framed floor construction – see LATICRETE Technical Data Sheet TDS1152 – Bonding Ceramic Tile, Stone or Brick Over Wood Framed Floors.
- Consult with cement backer board manufacturer for suitability for exterior use and proposed tiling loads.
- Polyester surfaces to be mechanically cleaned prior to adhering to.





# Globally Proven Construction Solutions

1800 Team members ■ 100 Countries ■ 65+ Years of innovation  
7 Continents ■ 3 Generations ■ 1 Family



# LATICRETE Has the Solutions

- Tile & Stone Installation and Care Systems
- LATICRETE® SUPERCAP® System
- Masonry Installation and Care Systems
- Concrete Construction Chemicals

