




Globally Proven  
Construction Solutions

# LATAPOXY® SP-100

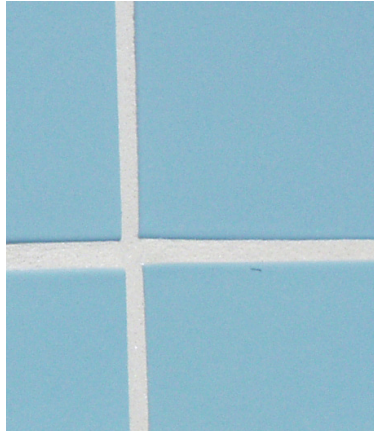

CERTIFIED  
**LOW VOC**

## FEATURES

- Sag resistant
- Uniform colour
- Stainless and chemical resistant
- Durable
- Smooth and creamy consistency
- Easy maintenance
- High temperature resistance
- Easy to use

## BENEFITS

- Will not sag when used in wide joints up to 12 mm.
- Resists blotching and reduces colour shade variations.
- Will not be stained by most foods, beverages and cleaning agents. 100% solids epoxy resists many acids, alkalis and corrosives.
- Will not peel, crack or powder.
- Easy to apply.
- Smooth texture, easier to clean than cementitious grout joints.
- Withstands steam and industrial machine cleaning up to 110°C.
- No noxious odour, non-flammable, water cleanable and easy to clean; even with textured tile.

## Uses

- Designed for exterior and interior applications
- Cafeterias, laboratories, malls, restrooms, swimming pools, kitchen floors, countertops, bathrooms, foyers.

## Packaging


#1 Resin Unit: Pail  
Part A: 1 x 0.818 kg  
Part B: 1 x 0.268 kg  
80 pails per pallet

#4 Resin Unit: Carton  
Part A: 4 x 0.818 kg  
Part B: 4 x 0.268 kg  
70 cartons per pallet

## Available Colours

Refer to Grout Colour Card for available colours

For the latest information on the features and use of this product, consult the product Data Sheet on our website at [www.laticrete.com.au](http://www.laticrete.com.au)



Snap for information.