




Globally Proven  
Construction Solutions

# STRATA\_MAT™

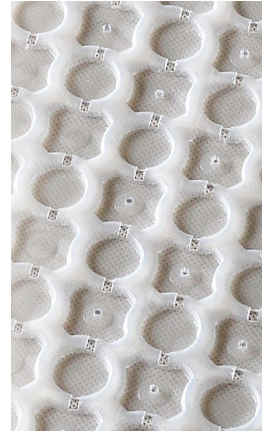

CERTIFIED  
**LOW VOC**

## FEATURES

Replaces traditional underlayment materials

Instant coverage verification

Prevents the main cause of cracked tiles

Lightweight alternative to cement backer board

No mess, no fuss

Adhesive hydration vents

Fast and easy layouts

Provides vapour management

## BENEFITS

Ensures the lasting beauty and functionality of tiled floors.

Translucent colour immediately indicates adhesive coverage under STRATA\_MAT.

Eliminates transmission of in plane substrate cracks of up to 3 mm.

Each 18.6 kg roll covers 30m<sup>2</sup>

Cuts with utility knife or scissors (no saws and no dust).

Accelerates thin-set curing for faster dry time of porcelain and larger format tiles – grout the next day.

STRATA\_MAT lays flat with minimal memory and chalk lines are highly visible.

Adhesive hydration vents provide a controlled evacuation of any excess vapour from a concrete slab to protect tiled surface.

## Uses

- A high performance uncoupling mat for use under ceramic tile and stone installations, for both residential and commercial applications.

## Suitable Substrates

- Concrete
- Cement mortar beds
- Resilient Flooring
- OSB
- Exterior glue plywood
- Cement terrazzo
- Cement render
- Existing tile or stone
- Cement backer board<sup>^</sup>
- Gypsum underlayment or light weight concrete\*

## Packaging

- 1.1 m x 12.2 linear metre roll; 12 rolls per pallet
- 1.1 m x 26.2 linear metre roll; 6 rolls per pallet

For the latest information on the features and use of this product, consult the product Data Sheet on our website at [www.laticrete.com.au](http://www.laticrete.com.au)



Snap for information.