




**Globally Proven  
Construction Solutions**

# 257 TITANIUM™

257 TITANIUM™ The ultimate, lightweight, polymer fortified, thin-set adhesive for the installation of large format porcelain panels, ceramic, stone and glass tiles. Formulated without sand.

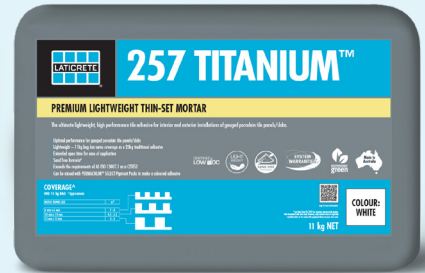

Product Data Sheet DS 1278



## FEATURES

- Specifically formulated
- Lightweight
- Extended open time
- Work safe
- Exceeds AS ISO 13007.1 as C2TES2
- Versatile
- Unique colour options

## BENEFITS

- Optimal performance for Gauged Porcelain Panels/Slabs.
- 11 kg bag has coverage of a 20 kg traditional bag.
- Longer open time for work with panels/slabs.
- Formulated without sand to reduce respirable silica.
- Exceeds the industries highest performance standard for cementitious based adhesives
- Superior for exterior, interior and immersed installations.
- Available for all PERMACOLOR® Select Colour Kit options.<sup>Δ</sup>

## Uses

- Interior, exterior and immersed installations
- Wall and Floor

## Suitable Substrates

- Exterior Glue Plywood\*   ▪ STRATA\_MAT
- Concrete Masonry       ▪ Concrete Block
- Cement Plaster         ▪ Cement Mortar Bed
- Cement Terrazzo       ▪ Cement Backer Board<sup>†</sup>
- Gypsum Wallboard\*     ▪ Gypsum Plaster\*
- Plastic Laminate\*      ▪ Existing Ceramic Tile and Stone
- Properly Prepared Vinyl Or Other Resilient Tile\*

## Packaging

11 kg bag; 56 bags per pallet

## Available Colours

White

## Approximate Coverage Per Bag

6 mm x 6 mm notched trowel	7 – 8 m <sup>2</sup>
10 mm x 10 mm notched trowel	4.5 – 5.5 m <sup>2</sup>

*N.B: Coverage Calculated with the trowel held at 45°. Coverage will depend on how the trowel is used and surface regularity.*

For the latest information on the features and use of this product, consult the product Data Sheet on our website at [www.laticrete.com.au](http://www.laticrete.com.au)



Snap for information.

<sup>Δ</sup>257 White only. \* Interior only. <sup>†</sup> Consult cement backer board manufacturer for specific installation recommendations and to verify acceptability for exterior use.