




PRODUCT CATALOGUE



**OUR PURPOSE IS
TO IMPROVE THE
BUILT WORLD
AND THE LIVES OF
THOSE WHO BUILD IT**

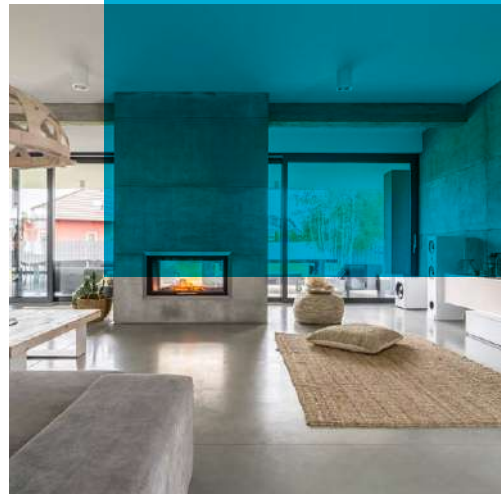

Globally Proven Construction Solutions



MORE THAN
65
YEARS



**INTERIOR
EXTERIOR
COMMERCIAL
RESIDENTIAL
INDUSTRIAL
MARINE
SWIMMING POOLS**



It's easy to think of 65 years as a lifetime. For LATICRETE[®], it's just the beginning.




LATICRETE® offers complete installation systems for every type of ceramic tile and natural stone, from substrates to grouts, for any intended use.

Since 1956 we are authentic partners for our customers. We provide the best support at every stage of your project thanks to our experience, product quality and LATICRETE technical support, no matter what the application.

ABOUT US

PREPARATION OF SUBSTRATES AND SCREEDS | DECOUPLING AND ANTI-FRACTURING | WATERPROOFING PRODUCTS | ADHESIVES | GROUTS AND SEALANTS

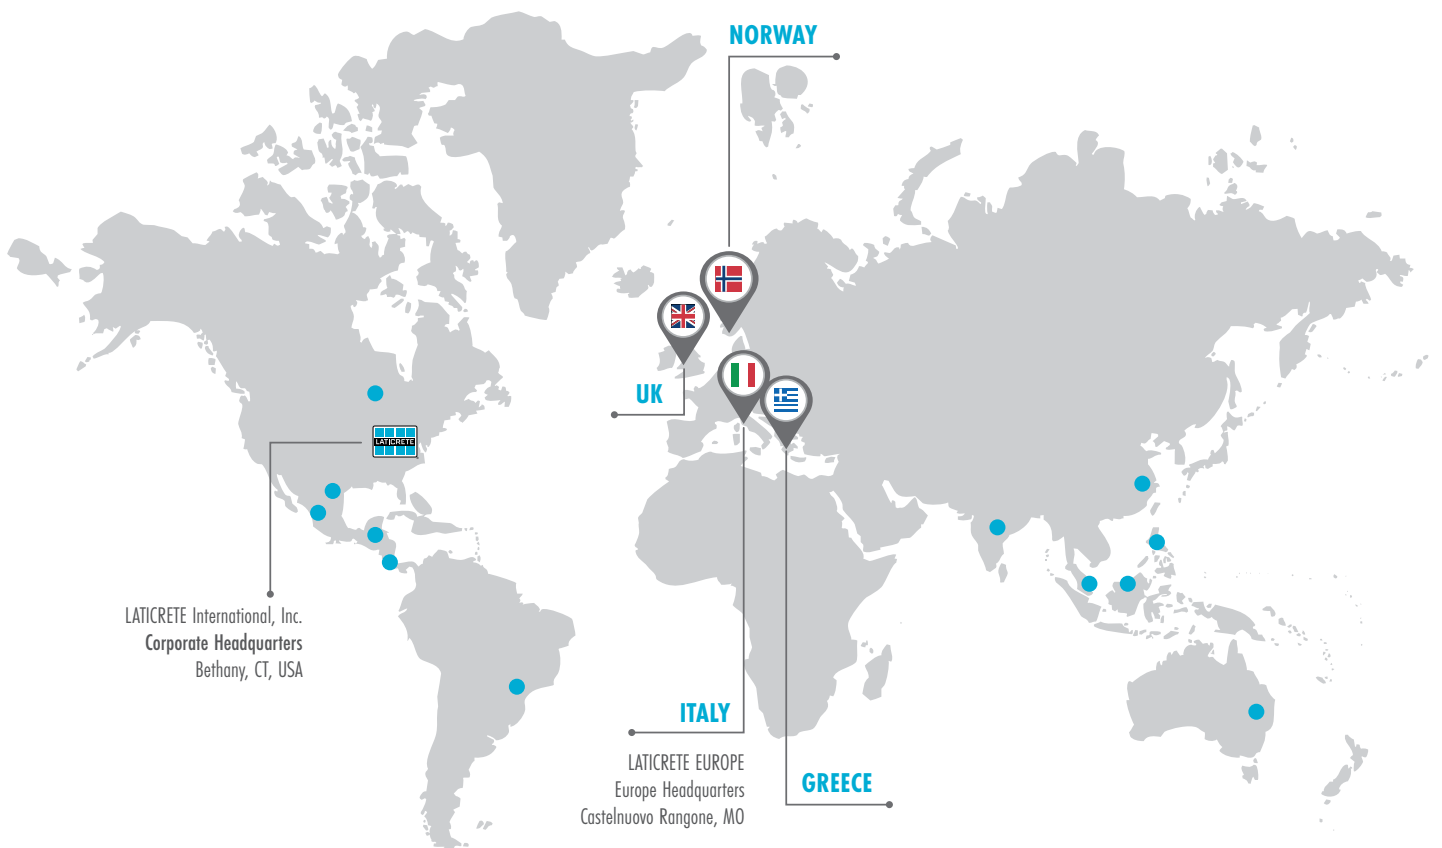

LATICRETE International, Inc.
Corporate Headquarters
Bethany, CT, USA

LATICRETE EUROPE
Europe Headquarters
Castelnuovo Rangone, MO

NORTH AMERICA | MEXICO | CHINA | SOUTHEAST ASIA | PHILIPPINES
MALAYSIA | MIDDLE EAST | AUSTRALIA | CENTRAL AMERICA | **EUROPE** | BRAZIL | INDIA | NORWAY | AFRICA

OVER 65 YEARS OF WORLDWIDE EXPERIENCE

100 COUNTRIES

1 MISSION

3 GENERATIONS - 1 FAMILY

ECO-SUSTAINABLE PRODUCTS AND SYSTEMS



Showers, bathrooms and damp places

Swimming pools, spas and fountains

Facades and exterior walls



Pavements and walkways

Balconies and terraces

Commercial and industrial kitchens

Industrial floors and technical rooms

Interior floors

Exterior floors

WHAT WE DO

PREPARATION OF SUBSTRATES AND SCREEDS
DECOUPLING AND ANTI-FRACTURING
WATERPROOFING
ADHESIVES
FLEXIBLE SEALANTS AND GROUTS



TILE & STONE INSTALLATION SYSTEMS

LATICRETE® industry-leading products offer complete system solutions, from substrate to grout, for all types of tile or natural stone installation and for all types of commercial, industrial and residential application. LATICRETE offers the most complete assortment of innovative materials for tile and stone to ensure a successful installation, every time.

A single partner able to give you peace of mind and certainty for your project.

TILE, STONE & SURFACE CARE

LATICRETE® offers a professional line of care and maintenance products: STONETECH®.

STONETECH tile and stone care products are highly reliable, provide high performance, and are thoroughly tested.

To ensure that the final result is perfect, a complete range of products is available depending on the different surfaces: natural stone, tiles, cement-based mortar and masonry mortar - which have different characteristics or grades of porosity.

PROTECTORS
CLEANERS
ENHANCERS




HOW WE WORK

QUALITY AND INNOVATION

At LATICRETE® the innovation process never stops. We guarantee the most innovative products for our sector. Research and development into new solutions have been the driving force for the success of our group and of our customers for over 65 years. Our products are developed in compliance with ISO 9001 quality standards in order to ensure a consistent, quality installation. More specifically, our quality management system complies with the requirements of ISO 9001:2015 for the design, production and technical support of installation products for tiles and natural stone.

GUARANTEED SYSTEMS

LATICRETE® offers the most complete guarantee on its products: our installation systems are covered by the LATICRETE ten-year warranty.

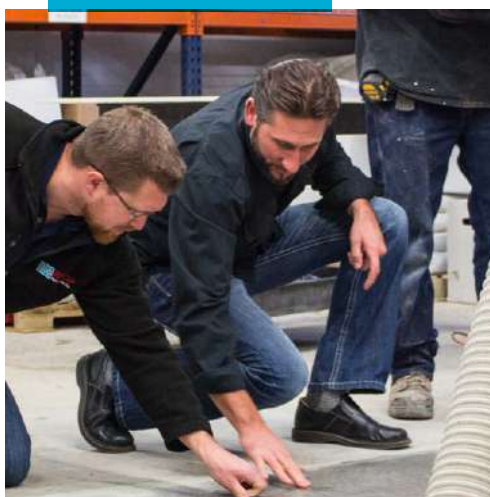

CERTIFICATIONS

Using sustainable products is especially important in order to create and keep an interior safe and healthy. The icons below are used to indicate the key to the certifications you will find in the products in the catalog.

ISO 9001:2015

International Organization for Standardization. The quality management system for the design, production and technical support of our materials.

MICROBAN

Built-in antimicrobial technology that inhibits the growth of bacteria and molds that cause stains.

ASTM

American Society for Testing and Materials. ASTM International helps develop standards worldwide.



Health, safety and environmental protection standards for products within the European Economic Area (EEA).



Low chemical emissions. The Greenguard certification can contribute to USGBC LEED credits.



Quality in the building industry. This indicates compliance with CSTB requirements for quality, performance and reliability.



Low chemical emissions. The EMICODE® classification system permits comparing and assessing the emission characteristics of installations of flooring and construction products.



American National Standards Institute.




International Association of Plumbing and Mechanical Officials.



Built-in antimicrobial technology that inhibits the growth of bacteria and molds that cause stains.



Low chemical emissions. The French label "Émissions dans l'air intérieur" evaluates the emissions of 10 substances and the "total volatile organic compounds" (TVOC) parameter must be measured and classified in four categories from A+ to C.



RINA IMO-MED certificate for use in marine applications in accordance with the MED directive.



GENERAL CONTENTS



TILE & STONE INSTALLATION SYSTEMS

SUBSTRATE PREPARATION, SCREEDS & MORTARS PAGE.10

PRIMER SUPERIOR	p. 13
PRIMER PLUS	p. 14
8510 BONDING ADMIX + 211 POWDER	p. 15
SKIM	p. 16
LEVEL PLUS FIBER	p. 17
LEVEL MAXI	p. 18
LEVEL	p. 19
2261 FLUID FAST	p. 20
2261 SCREED	p. 21
2261 BINDER	p. 22
LATAFLOAT SYSTEM	p. 23
3701 MORTAR ADMIX	p. 24
DECOUPLING MAT	p. 25
LATIRENDER 07	p. 26

WATERPROOFING PAGE.28

HYDRO BAN®	p. 31
9235 WATERPROOFING MEMBRANE	p. 32
AQUA BARRIER	p. 33
AQUA BARRIER RDY TOP	p. 34
AQUA BARRIER RDY	p. 35
HYDRO BAN® SHEET MEMBRANE	p. 36
HYDRO BAN® PREFORMED IC & OC HYDROBAN FLOOR COLLARS & COLLAR	p. 37
WPM TAPE	p. 37
WPM TAPE PLV	p. 38
AQUA BARRIER NET	p. 38
LATAPOXY® WATERPROOFING FLASHING MORTAR	p. 39
DECOUPLING MAT 2.0	p. 40

ADHESIVES

PAGE.42

254 PLATINUM	p. 47
4237 LATEX ADDITIVE + 211 POWDER	p. 48
345 SUPER FLEX	p. 49
345 RAPID S	p. 50
335 MAXI S	p. 51
335 MAXI LW	p. 52
335 SUPER FLEX	p. 53
335 RAPID	p. 54
335 RAPID FL	p. 55
325 MAXI	p. 56
325 HIFLEX	p. 57
325 FLEX	p. 58
325 RAPID	p. 59
73 CRETE ADMIX + 211 POWDER	p. 60
315 PLUS	p. 61
LATALASTIK	p. 63
LATAPOXY® 300 ADHESIVE	p. 64
LATAPOXY® 310 STONE ADHESIVE	p. 65
15 PREMIUM ADHESIVE	p. 66

GROUTS & JOINT SEALANTS

PAGE.68

PERMACOLOR® SELECT	p. 71
PERMACOLOR® SELECT FINE	p. 72
COLORBASE FS	p. 76
COLORBASE FL	p. 78
LATAPOXY® 210 GROUT	p. 80
SPECTRALOCK® PRO PREMIUM GROUT	p. 82
SPECTRALOCK® PRO PREMIUM TRANSLUCENT GROUT	p. 83
SPECTRALOCK® DAZZLE™	p. 85
SPECTRALOCK® 2000 IG	p. 86
LATASIL™	p. 87
LATASIL™ PRIMER	p. 89
POLYPROFIL	p. 89

TILE, STONE & SURFACE CARE

PROTECTORS

STONETECH® BULLETPROOF® SEALER	p. 93
STONETECH® HEAVY DUTY EXTERIOR SEALER	p. 94
STONETECH® CONCRETE SEALER	p. 95

CLEANERS

STONETECH® REVITALIZER® CLEANER & PROTECTOR	p. 96
STONETECH® STONE & TILE CLEANER	p. 97
STONETECH® KLENZALL™ CLEANER	p. 98
STONETECH® CLEANER ACID	p. 99
STONETECH® MOLD & MILDEW STAIN REMOVER	p. 100
STONETECH® EPOXY GROUT HAZE & COATING STRIPPER	p. 101
STONETECH® RESTORE™ ACIDIC CLEANER	p. 102

ENHANCERS

STONETECH® ENHANCER PRO™ SEALER	p. 103
---------------------------------------	--------





ALPHABETIC INDEX

Summary pages

15 PREMIUM ADHESIVE.....	p. 66
73 CRETE ADMIX + 211 POWDER	p. 60
254 PLATINUM	p. 47
315 PLUS	p. 61
325 FLEX.....	p. 58
325 HIFLEX.....	p. 57
325 MAXI.....	p. 56
325 RAPID	p. 59
335 MAXI LW	p. 52
335 MAXI S	p. 51
335 RAPID.....	p. 54
335 RAPID FL	p. 55
335 SUPER FLEX	p. 53
345 RAPID S.....	p. 50
345 SUPER FLEX.....	p. 49
2261 BINDER.....	p. 22
2261 FLUID FAST.....	p. 20
2261 SCREED	p. 21

3701 MORTAR ADMIX.....	p. 24
4237 LATEX ADDITIVE + 211 POWDER.....	p. 48
8510 BONDING ADMIX + 211 POWDER.....	p. 15
9235 WATERPROOFING MEMBRANE.....	p. 32
AQUA BARRIER.....	p. 33
AQUA BARRIER NET.....	p. 38
AQUA BARRIER RDY.....	p. 35
AQUA BARRIER RDY TOP.....	p. 34
COLORBASE FL.....	p. 78
COLORBASE FS.....	p. 76
DECOUPLING MAT.....	p. 25
DECOUPLING MAT 2.0.....	p. 40
HYDRO BAN®.....	p. 31
HYDRO BAN® FLOOR COLLARS & COLLAR.....	p. 37
HYDRO BAN® PREFORMED IC & OC.....	p. 37
HYDRO BAN® SHEET MEMBRANE.....	p. 36
LATAFLOAT SYSTEM.....	p. 23
LATALASTIK.....	p. 63
LATAPOXY® 210 GROUT.....	p. 80
LATAPOXY® 300 ADHESIVE.....	p. 64
LATAPOXY® 310 STONE ADHESIVE.....	P. 65
LATAPOXY® WATERPROOFING FLASHING MORTAR.....	p. 39
LATASIL™.....	p. 87
LATASIL™ PRIMER.....	p. 89
LATIRENDER 07.....	p. 26
LEVEL.....	p. 19
LEVEL MAXI.....	p. 18
LEVEL PLUS FIBER.....	p. 17
PERMACOLOR® SELECT.....	p. 71
PERMACOLOR® SELECT FINE.....	p. 72
POLYPROFIL.....	p. 89
PRIMER PLUS.....	p. 14
PRIMER SUPERIOR.....	p. 13
SKIM.....	p. 16
SPECTRALOCK® 2000 IG.....	p. 86
SPECTRALOCK® DAZZLE™.....	p. 85
SPECTRALOCK® PRO PREMIUM GROUT.....	p. 82
SPECTRALOCK® PRO PREMIUM TRANSLUCENT GROUT.....	p. 83
STONETECH® BULLETPROOF® SEALER.....	p. 93
STONETECH® CLEANER ACID.....	p. 99
STONETECH® CONCRETE SEALER.....	p. 95
STONETECH® ENHANCER PRO™ SEALER.....	P. 103
STONETECH® EPOXY GROUT HAZE & COATING STRIPPER.....	p. 101
STONETECH® HEAVY DUTY EXTERIOR SEALER.....	p. 94
STONETECH® KLENZALL™ CLEANER.....	p. 98
STONETECH® MOLD & MILDEW STAIN REMOVER.....	p. 100
STONETECH® RESTORE™ ACIDIC CLEANER.....	P. 102
STONETECH® REVITALIZER® CLEANER & PROTECTOR.....	p. 96
STONETECH® STONE & TILE CLEANER.....	p. 97
WPM TAPE.....	p. 37
WPM TAPE PLV.....	p. 38



A close-up photograph of a construction worker's hand, wearing a blue glove, holding a metal screed bar. The worker is leveling a concrete surface. The background shows a rough, gravelly concrete floor and a white wall with a vent. A teal-colored rectangular overlay is positioned on the right side of the image, containing the text.

**SUBSTRATE
PREPARATION,
SCREEDS &
MORTARS**



Preparing the surface for laying stone, tiles, porcelain stoneware, parquet or special finishing materials ensures a long-lasting, resistant installation.

LATICRETE® offers several products for preparing surfaces, including primers, vapor reducers, screeds, self-leveling and leveling products.



2261 FLUID FAST

Cement-based fluid screed




2261 FLUID FAST is a special cement-based mortar with a fluid consistency and controlled shrinkage for:

- **Residential applications**
- **Commercial applications in interiors**
- **Laying ceramic tiles, stone tiles, parquet and resilient materials**
- **Can be used for heating screeds from 3 to 8 cm thick**

It is safe and non-flammable, easy to use also with the aid of a pump.

PRIMER SUPERIOR

Single-component primer for absorbent and non-absorbent subfloors



PRODUCT DESCRIPTION

PRIMER SUPERIOR is a ready-to-use, solvent-free primer designed to improve the adhesion of cement-based adhesives to absorbent and non-absorbent substrates.

PRIMER SUPERIOR reduces surface porosity.

FEATURES & BENEFITS

- For absorbent and non-absorbent substrates
- Ready-to-use
- Filled with quartz sand to improve adhesion
- Fast drying
- With low emissions of volatile organic substances

TECHNICAL CHARACTERISTICS

- Color: blue
- Density: ~ 1.2 kg/dm³
- pH: ~ 6.5
- Walkability: ~ 1 hour
- Wait for installation: 1 to 24 hours

INTENDED USE

- Indoor, outdoor
- Non-treated ceramic tiles and natural stone
- Concrete, screeds and cement- or gypsum-based plasters

CONSUMPTION


~ 200 g/m²

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS

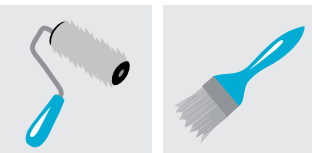

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000006010	PRIMER SUPERIOR	BLUE	5 kg/pail	80 pails
L0000000000006011	PRIMER SUPERIOR	BLUE	10 kg/pail	40 pails

PRIMER PLUS

Single-component primer for absorbent subfloors



PRODUCT DESCRIPTION

PRIMER PLUS is a polymer-based primer designed to reinforce substrates with a weak and powdery surface. After drying it provides good adhesion to adhesives for tiles, self-leveling products and cement-based waterproofers on all the absorbent subfloors normally used in the building industry, reducing their absorption so that the products applied later on do not lose their moisture content too quickly.

FEATURES & BENEFITS

- For absorbent subfloors only
- Ready-to-use
- Fast drying
- With low emissions of volatile organic substances

TECHNICAL CHARACTERISTICS

- Color: white
- Density: ~ 1.06 kg/dm³
- pH: ~ 5
- Walkability: ~ 1 hour
- Wait for installation: 1 to 24 hours

INTENDED USE

- Indoor, outdoor
- Concrete, screeds and plasters based on cement, gypsum or anhydrite
- Blocks of cement, masonry of concrete and brick
- Panels made of cement, fiber-cement, calcium silicate and drywall
- Natural stone, wood

CONSUMPTION

~ 200 g/m²

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000006000	PRIMER PLUS	COLORLESS	5 kg/pail	90 pails
L0000000000006001	PRIMER PLUS	COLORLESS	25 kg/pail	36 pails

8510 BONDING ADMIX + 211 POWDER

High-performance, two-component leveling and smoothing compound



PRODUCT DESCRIPTION

8510 BONDING ADMIX is a concentrated latex additive formulated to be used with 211 POWDER to create a high performance leveling and smoothing compound. When mixed with 211 POWDER it creates an extremely workable, notched trowelble smoothing compound, applicable in thicknesses from 1 to 5 mm. This smoothing compound can be used in swimming pools and applied straight onto steel (for use in the naval sector).

FEATURES & BENEFITS

- Versatile - a single product for interior and exterior installations
- Improved workability and easy to use
- Low VOC content
- Can be used with cement-based smoothing compounds and plasters
- The best preparation for the subfloor before tiling
- Can be used on steel
- Ideal for use on ships and swimming pools before waterproofing.
- IMO-MED certified

TECHNICAL CHARACTERISTICS

- Classification EN 13813: CT C45 - F15
- Max particle size: ~ 0.5 mm
- Application thicknesses: from 1 to 5 mm
- Workability time: ~ 30 min
- Walkability: ~ 6 hours
- Wait for installation: ~ 12 hours
- Compressive strength: ~ 45 N/mm²
- Tensile adhesion to concrete: ~ 2.0 N/mm²
- Tensile adhesion to sheet metal: ~ 1.4 N/mm²
- Working temperature: -30°C to +90°C

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Concrete, plasters and cement-based screeds
- Old tiles and natural stone
- Cement panels
- Metals

CE MARKING

CE EN13813
CT C45 F15

CONSUMPTION


Mixed with 211 POWDER:
0.3 - 0.5 l/m² of latex
per mm of thickness

SHELF LIFE

8510 BONDING ADMIX: 5 years
21 POWDER: 12 months




CERTIFICATIONS



ASTM


TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000006071	8510 BONDING ADMIX	WHITE	3 kg/5.5 l pail	48 pails
L0000000000006070	8510 BONDING ADMIX	WHITE	20 kg/pail	36 pails
L0000000000001360	211 POWDER	WHITE	25 kg/bag	48 pails
L0000000000001350	211 POWDER	GREY	25 kg/bag	48 pails

SKIM

Leveling and smoothing mortar for interiors and exteriors, for thicknesses up to 30 mm



PRODUCT DESCRIPTION

SKIM is a high-quality, cement-based smoothing mortar for creating flat surfaces for the subsequent application of waterproofing or coating products.

Applicable in thicknesses from 2 mm to 30 mm. It is applied with a smooth steel notched trowel. Its creamy soft consistency makes it the ideal smoothing product also on very rough surfaces.

FEATURES & BENEFITS

- For thicknesses from 2 to 30 mm
- For walls, floors and ceilings
- Quick-setting - ready for laying tiles in just 4 hours
- Low shrinkage

TECHNICAL CHARACTERISTICS

- Classification EN 13813: CT C25 - F4
- Classification EN 1504-3: R2 PCC
- Max particle size: ~ 0.5 mm
- Application thicknesses: from 2 to 30 mm
- Workability time: ~ 30 min
- Walkability: ~ 3 hours
- Wait for laying tiles: ~ 4 hours
- Compressive strength: ~ 0 N/mm²
- Tensile adhesion to concrete: ~ 1.1 N/mm²

INTENDED USE

- Indoor, outdoor
- Wall, floor, ceiling
- Concrete, plasters and cement-based screeds
- For swimming pools before installing waterproofing under tiles

CE MARKING

CE EN13813
CT C25 F4 A1 fl

EN1504-3
R2

CONSUMPTION

1.5 kg/m² per 1 mm of thickness

SHELF LIFE

12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000009020	SKIM	GREY	25 kg/bag	48 bags

LEVEL PLUS FIBER

High-quality, fiber-reinforced, cement-based self-leveling product for thicknesses up to 50 mm



PRODUCT DESCRIPTION

LEVEL PLUS FIBER is a cement-based, fiber-reinforced self-leveling product. Applicable on subfloors of different types such as: concrete and ceramic tiles. LEVEL PLUS FIBER ensures a flat smooth surface on which can be bonded the cladding most frequently used in the building trade: ceramic tiles, parquet or resilient materials.

FEATURES & BENEFITS

- With low emissions of volatile organic substances
- Can be applied with a pump
- Fast setting – can be walked on after 4 hours
- Ideal for leveling before laying large-sized tiles
- Fiber-reinforced, suited for wood substrates
- For heated screeds
- For thicknesses from 3 to 50 mm

TECHNICAL CHARACTERISTICS

- Classification EN 13813: CT C30 - F7
- Max particle size: ~ 0.5 mm
- Application thicknesses: from 3 to 50 mm
- Workability time: ~ 20 min
- Walkability: ~ 4 hours
- Wait for laying tiles: ~ 24 hours
- Wait for laying parquet: ~ 3 days
- Compressive strength: ~ 35 N/mm²
- Tensile adhesion to concrete: ~ 1.5 N/mm²

INTENDED USE

- Indoors
- Concrete, screeds
- Wood panels (primer)
- Old tiles and stone (primer)
- Heated screeds

CE MARKING

CE EN13813
CT C30 F7 E fl

CONSUMPTION


1.65 kg/m² per 1 mm of thickness

SHELF LIFE



12 months



CERTIFICATIONS




TOOLS

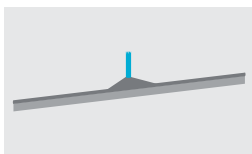

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000011020	LEVEL PLUS FIBER	GREY	20 kg/bag	54 bags

LEVEL MAXI

High performance cement-based self-leveling product for thicknesses up to 30 mm



PRODUCT DESCRIPTION

LEVEL MAXI is self-leveling mortar to smooth and restore the flatness of uneven subfloors, applicable in thicknesses from 1 to 30 mm. Guarantees great adhesion, dimensional stability, rapid drying and high mechanical strength. Equipped with good elasticity, it is also suited for being applied on heating subfloors.

FEATURES & BENEFITS

- For heated screeds
- With low emissions of volatile organic substances
- Installation is made easier by its excellent workability and capacity for self-leveling
- Pumpable; no need for smoothing and troweling
- Fast setting, pedestrian traffic after approximately 4 hours
- High compressive strength

TECHNICAL CHARACTERISTICS

- Classification EN 13813: CT C30 - F7
- Max particle size: ~ 0.5 mm
- Application thicknesses: from 1 to 30 mm
- Workability time: ~ 20 min
- Walkability: ~ 4 hours
- Wait for laying tiles: ~ 24 hours
- Wait for laying parquet: ~ 3 days
- Compressive strength: ~ 35 N/mm²
- Tensile adhesion to concrete: ~ 1.5 N/mm²

INTENDED USE

- Indoors
- Concrete, screeds
- Old tiles and stone (primer)
- Heated screeds

CE MARKING

CE EN13813
CT C30 F7 A1 fl

CONSUMPTION


1.65 kg/m² per 1 mm of thickness

SHELF LIFE



12 months



CERTIFICATIONS




TOOLS

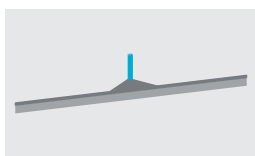

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L000000000011010	LEVEL MAXI	GREY	25 kg/bag	48 bags

LEVEL

High performance cement-based self-leveling product for thicknesses up to 12 mm



PRODUCT DESCRIPTION

LEVEL is self-leveling mortar to smooth and restore the flatness of uneven subfloors. Applicable in thicknesses from 1 mm to 12 mm. Guarantees great adhesion, dimensional stability, rapid drying and high mechanical strength. Equipped with good elasticity, it is also suited for being applied on heating subfloors.

FEATURES & BENEFITS

- Easy to use and fast setting
- With low emissions of volatile organic substances
- Pumpable; no need for smoothing and troweling
- Long gelling times for greater workability
- Surface suited for most floor finishes
- Compatible with most adhesives

TECHNICAL CHARACTERISTICS

- Classification EN 13813: CT C25 - F4
- Max particle size: ~ 0.5 mm
- Application thicknesses: from 1 to 12 mm
- Workability time: ~ 20 min
- Walkability: ~ 4 hours
- Wait for laying tiles: ~ 24 hours
- Wait for laying parquet: ~ 3 days
- Compressive strength: ~ 28 N/mm²
- Tensile adhesion to concrete: ~ 1.2 N/mm²

INTENDED USE

- Indoors
- Concrete, screeds
- Old tiles (primer)
- Heated screeds

CE MARKING

CE EN13813
CT C25 F4 A1 fl

CONSUMPTION

1.65 kg/m² per 1 mm of thickness

SHELF LIFE



12 months



CERTIFICATIONS



TOOLS

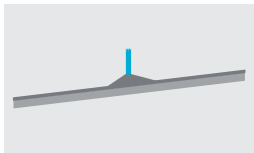

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000011000	LEVEL	GREY	25 kg/bag	48 bags

2261 FLUID FAST

Fast setting screed with fluid consistency



PRODUCT DESCRIPTION

2261 FLUID FAST is a special cement-based mortar with a fluid consistency and controlled shrinkage. It is used for fast drying screeds, suited for residential and commercial indoor installations.

FEATURES & BENEFITS

- For ceramic tiles, stone tiles, parquet and resilient materials
- For screeds from 0.8 cm to 8 cm in thickness
- Workability time - 45 minutes
- Controlled shrinkage, free of cracks
- Fast setting, laying tiles or stone after 24 hours
- Safe, non-flammable
- Easy to use, pumpable
- Can be used for heating screeds, from 3 cm to 8 cm in thickness

TECHNICAL CHARACTERISTICS

- Classification EN 13813: CT C40 - F7
- Max particle size: ~ 4 mm
- Application thicknesses: from 0.8 to 8 cm
- Workability time: ~ 45 min
- Walkability: ~ 3 hours
- Wait for installation: ~ 24 hours
- Wait for laying parquet: ~ 3 days
- Compressive strength: ~ 40 N/mm²
- Thermal conductivity λ (EN 12664): ~ 1.39 W/mK

INTENDED USE

- Indoors
- Concrete, screeds
- Old ceramic tiles

CE MARKING

CE EN13813
CT-C40-F7 A1 fl

CONSUMPTION


~ 16 -17 kg/m² per 1 mm in thickness

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS

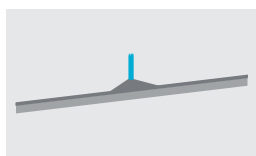

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000010020	2261 FLUID FAST	GREY	25 kg/bag	50 bags

2261 SCREED

Fast drying screed with controlled shrinkage



PRODUCT DESCRIPTION

2261 SCREED is a special fast-drying cement-based mix, but with traditional screed workability times, for floating and anchored screeds. For use in residential and commercial installations.

FEATURES & BENEFITS

- For ceramic, stone, parquet and resilient materials
- Pre-mixed, no dosing on site required
- Fast drying and anti-cracking
- Fast drying, laying ceramic or stone after 24 hours
- Safe and non-flammable
- Easy to use, pumpable
- Compliant with the classification of EN 13813 CT-C25-F5-A1 fl
- IMO-MED certified

TECHNICAL CHARACTERISTICS

- Classification EN 13813: CT C25 - F5
- Max particle size: ~ 3 mm
- Max. application thicknesses: ~ 8 cm
- Workability time: ~ 45 min
- Walkability: ~ 10 hours
- Wait for installation: ~ 24 hours
- Wait for laying parquet: ~ 4 days
- Compressive strength: $\geq 28 \text{ N/mm}^2$
- Thermal conductivity λ (EN 12664): ~ 1.39 W/mK

INTENDED USE

- Indoor, outdoor
- Concrete, screeds
- Old ceramic tiles

CE MARKING

CE EN13813
CT C25 F4 A1 fl

CONSUMPTION


~ 18 -19 kg/m² per 1 cm of thickness

SHELF LIFE

12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-2261S-0025-21-F	2261 SCREED	GREY	25 kg/bag	60 bags

2261 BINDER

Hydraulic binder for cement-based screeds with damp soil consistency, quick drying and controlled shrinkage for subsequent laying of ceramic tiles, natural stone, parquet and resilient materials



PRODUCT DESCRIPTION

2261 BINDER is a hydraulic binder formulated with special high-strength cements and synthetic additives for making shrinkage-free laying substrates. For making heating screeds and for high traffic areas.

FEATURES & BENEFITS

- Same workability times as conventional screeds, reduces the waiting time for floor laying
- For any substrate (floating screed), avoids preparing and cleaning the substrate
- Fast setting, controlled shrinkage, free of cracks, laying ceramic tiles and natural stone after only 24 hours
- Easy to use, pumpable

TECHNICAL CHARACTERISTICS

- Workability time: ~ 60 min
- Walkability: ~ 6 hours
- Wait for installation: ~ 24 hours
- Wait for laying parquet: ~ 4 days

INTENDED USE

- Indoor, outdoor
- Concrete, screeds
- Old ceramic tiles

CONSUMPTION


2.5 - 3.5 kg/m² per cm in thickness

SHELF LIFE

12 months




TOOLS

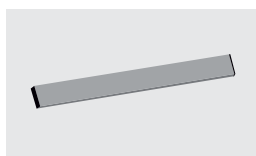

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-09510-0020-F	2261 BINDER	GREY	20 kg/bag	60 bags

LATAFLOAT SYSTEM

System for floating cement-based screed with shallow thickness



PRODUCT DESCRIPTION

LATAFLOAT SYSTEM is a composite system formed by a fiber-reinforced cement-based powder with compensated shrinkage (LATAFLOAT 250 MORTAR), a special liquid polymer additive (3701 MORTAR ADMIX), and a synthetic fabric with a three-dimensional mesh made of nylon. LATAFLOAT SYSTEM allows making floating screeds with a minimum thickness of 1 cm instead of the traditional cement-based screeds with a thickness of 4-5 cm.

FEATURES & BENEFITS

- Ideal for separating the new floor from the existing substrate with no stresses being transmitted
- Allows installing new floors without removing the existing floors
- Cost-effective, long-lasting and flexible
- Excellent workability, easy to install, reinforced with fibers
- Reduces consumption and weight compared to a traditional screed
- Classified as CT-C20-F6 in accordance with EN 13813

TECHNICAL CHARACTERISTICS

- Classification EN 13813: CT C20 - F6
- LATAFLOAT 250 MORTAR grain size: ~1.0 mm
- Workability time: ~ 45 min
- Application thicknesses: from 1 to 5 cm
- Walkability: 6-8 hours
- Wait for laying tiles: ~ 2 days
- Wait for laying parquet: ~ 7 days
- Compressive strength: ~ 22 N/mm²

INTENDED USE

- Indoor, outdoor
- Residential, commercial
- Heating floors
- Can be used on high-quality flooring to maintain original integrity

CE MARKING

CE EN13813
CT-C20-F6

CONSUMPTION


LATAFLOAT 250 MORTAR:
15 kg/cm²
3701 MORTAR ADMIX:
2.4 kg/cm²

SHELF LIFE

LATAFLOAT 250 MORTAR:
12 months
3701 MORTAR ADMIX:
5 years




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
LFT10MM-45	LATAFLOAT MAT	GREY	45 m ² roll	-
L00000000000010010	LATAFLOAT 250 MORTAR	GREY	25 kg/bag	56 bags
L0000000000006020	3701 MORTAR ADMIX	WHITE	20 kg/pail	36 bags

3701 MORTAR ADMIX

Special polymer based latex additive designed to be mixed with powder cement-based products



PRODUCT DESCRIPTION

3701 MORTAR ADMIX is a multipurpose latex admixture specially designed for use as an additive with powder cement-based products: adhesives for cement-based tiles, cement-based slurry bond coats, cement-based mortars, screeds and other cement-based mixes. Used in place of water or diluted with water, 3701 MORTAR ADMIX improves the workability and physical properties of any cement-based mix and provides a cost-effective easy way of increasing the performance of installations of ceramic tiles, bricks and stone materials.

FEATURES & BENEFITS

- Interior and exterior installations. Resistant to impact, chemical agents and frost
- Water resistant - for submerged applications
- Greater adhesion and compressive strength
- Superior flexibility
- Greenguard certification - low emissions of VOC, better indoor air quality
- "Extra Heavy Service" rating as per ASTM C627 Robinson Floor Test
- Can be mixed with 211 POWDER or neat cement for use as a slurry bond coat
- Can be used in place of water for plasters, smoothing compound or screeds as 2261 SCREED
- Can be used as part of the LATAFLOAT system, for a thin and floating screed
- Can be used with adhesives for LATICRETE tiles to enhance their performance; (S1 or S2)

TECHNICAL CHARACTERISTICS

- Mixed with LATAFLOAT 250 MORTAR classification EN 13813: CT C20 - F6
- Pure mixed with LATICRETE C1 adhesives classification EN 12004: C2 TE S2
- Diluted mixed 1:1 with LATICRETE C1 adhesives classification EN 12004: C2 TE S1

INTENDED USE

- Indoor, outdoor
- Wall, floor

CONSUMPTION

See technical data sheet

SHELF LIFE

5 years



CERTIFICATIONS




ASTM

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000006020	3701 MORTAR ADMIX	WHITE	20 kg/pail	36 bags
L0000000000006022	3701 MORTAR ADMIX	WHITE	5 kg/bag	80 bags

DECOUPLING MAT

Three-ply decoupling membrane



PRODUCT DESCRIPTION

DECOUPLING MAT is a three-ply decoupling membrane used to protect ceramic floors from movements of the substrate in commercial and residential settings. It permits fast installation and protects the floor underneath the tiles from the formation or presence of cracks.

FEATURES & BENEFITS

- Absorbs movement in the subfloor and prevents cracks from breaking or detaching the tile
- Lightweight, easy to carry and fast to install with standard tools
- The thin membrane enables making the anti-fracture system without increasing the total thickness
- It is applied to the substrate with a normal adhesive for tiles modified with a polymer (C2)
- Ideal for use with floor heating
- Ideal for use on plywood and chipboard

INTENDED USE

- Indoors
- Screeds
- Old ceramic or natural stone floors
- Fiber-cement panels, calcium silicate panels
- Plywood or particle board panels

CONSUMPTION


- 1 m x 10 m x 0.85 mm roll
- 1 m x 50 m x 0.85 mm roll

SHELF LIFE

5 years




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000012000	DECOUPLING MAT	WHITE	10 m ² roll	50 rolls
L0000000000012001	DECOUPLING MAT	WHITE	50 m ² roll	20 rolls

LATIRENDER 07

Adhesive and smoothing compound in powder form for thermal cladding and old plasters composed of cement, aggregate with a grain size of under 0.7 mm, synthetic resins and special additives.



PRODUCT DESCRIPTION

LATIRENDER 07 is an adhesive and smoothing compound in powder form for thermal cladding and old plasters. Composed of cement, aggregate (grain size of diameter <0.7mm), synthetic resins and special additives. For skim coating old plasters and masonry, LATIRENDER 07 can be applied in thicknesses of between 5-10 mm and it creates a flat stable backing for installing various finishes, including paint, waterproofing agents and colored mineral finishes. It can be installed on various types of concrete backings and panels.

The LATIRENDER 07 formulation has been conceived and developed to bond insulation cladding panels quickly and safely.

FEATURES & BENEFITS

- Extremely easy to use - thixotropic and creamy consistency
- Fine grain size (diameter less than 0.7 mm) - produces a fine smooth finish
- Premixed and ready-to-use - just mix with water
- Non-flammable
- Creates a stable backing ideal for subsequent applications of various finishes, e.g.: paint, waterproofing, colored mineral finishes, etc.
- Can be applied manually or by machine
- The white version is fiber-reinforced

TECHNICAL CHARACTERISTICS

- Classification EN 998-1: GP-CSIV-W2
- Max. inert grain size: ~ 0.7 mm
- Workability time: ~ 2 hours
- Minimum panel shaving thickness: ~ 5 mm
- Adhesion to the substrate: ~ 0.5 N/mm²
- Compressive strength: ~ 6 N/mm²
- Thermal conductivity (EN 12664): ~ 0.47 W/mK

INTENDED USE

- Indoor, outdoor
- Wall
- Bonding and shaving of panels made of extruded and foam polystyrene, polyurethane, wood or mineral fiber (stone wool, glass wool) onto concrete, brick masonry or concrete blocks, plaster
- Surface for paint, color mineral finishes, waterproofing

CE MARKING



CONSUMPTION

As an adhesive: 3 kg/m²
As a smoothing compound: 1.4 kg/m² per mm of thickness

SHELF LIFE


12 months



CERTIFICATIONS



TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-01531-0025-21-M	LATIRENDER 07	WHITE	25 kg/bag	48 bags
24-01530-0025-22-M	LATIRENDER 07	GREY	25 kg/bag	48 bags





WATERPROOFING



Waterproofing presents challenges not found in typical indoor applications. LATICRETE® offers waterproofing solutions that seal and protect floors and walls for occasionally wet applications, such as bathrooms, balconies or terraces, or continuously submerged applications such as showers and swimming pools.

LATICRETE solutions range from ready-to-use liquid waterproofing membranes to two-component or one-component elastic waterproofing cement mortar and preformed multilayer membrane that can be applied either for waterproofing or for anti-fracturing protection, thereby obtaining waterproof solutions that are fast and easy to install.



HYDRO BAN®

Waterproofing liquid membrane



HYDRO BAN® is a thin waterproofing membrane with a high crack bridging capacity that does not require using a mesh, fabric, tapes and special pieces for edges, corners and joints with drains.

After complete polymerization it forms a continuous membrane that is highly flexible and therefore

- **Fine for indoor and outdoor use**
- **Ideal for showers, balconies, terraces and constantly submerged areas such as swimming pools and fountains**
- **Needs no strap, mesh or special parts.**

HYDRO BAN®

Waterproofing and anti-fracturing single-component membrane applied with a notched trowel, roller or brush



PRODUCT DESCRIPTION

HYDRO BAN® is a thin waterproofing membrane that does not require the use of reinforcing fabric of synthetic fiber, not even near corners and edges. HYDRO BAN is a single-component polymer made from self-setting liquid synthetic rubber that after completely curing forms a highly flexible continuous membrane. It adheres directly onto many backings.

FEATURES & BENEFITS

- Ready-to-use - it is applied quickly with a brush and roller
- Fast setting - allows performing seal tests after just 2 hours
- Inhibits the onset of mold and bacteria thanks to the antimicrobial protection Microban®
- Anti-fracturing for shrinkage cracking and non-structural cracks of up to 3 mm
- It does not require using reinforcement fabric (for cracks smaller than 3 mm)
- Safe - it contains no solvents and is non-flammable
- Adheres directly to metal and PVC pipes
- Permits direct bonding of ceramic, stone and marble

TECHNICAL CHARACTERISTICS

- Classification EN 14891: DM OP
- Positive pressure resistance (7 days): ~ 1.5 bar
- Crack-bridging ability: ~ 5 mm
- Wait for applying second coat: ~ 2 hours
- Wait for laying tiles: ~ 2 hours

INTENDED USE

- For indoor and outdoor use
- Swimming pools, fountains, shower cubicles, areas surrounding pools, bathrooms, commercial, industrial and residential kitchens and laundries
- Spas, whirlpools and steam rooms
- Kitchens and food processing areas
- Balconies and terraces
- Concrete, cement-based screeds and plasters
- Drywall, wood and fiber-cement panels

CE MARKING



CONSUMPTION

~ 0.95 kg/m²

SHELF LIFE



24 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000007042	HYDRO BAN®	GREEN	5 kg/pail	80 pails
L0000000000007044	HYDRO BAN®	GREEN	10 kg/pail	40 pails
L0000000000007043	HYDRO BAN®	GREEN	20 kg/pail	27 pails
S-09235-NF-19	ANTI-FRACTURE MINI FABRIC	-	22.5 m x 15 cm roll	-

9235 WATERPROOFING MEMBRANE

Waterproofing system anti-fracturing with reinforcement fabric



MICROBAN

PRODUCT DESCRIPTION

9235 WATERPROOFING MEMBRANE is a thin waterproofing membrane composed of a liquid and a synthetic fiber reinforcement fabric specifically designed for waterproofing with positive hydrostatic pressure. When dry the product forms a highly flexible continuous membrane that perfectly adheres to many backings commonly used in the building trade.

FEATURES & BENEFITS

- It is quickly applied with a brush or a roller - no special equipment needed
- Dries quickly in just a few hours
- Inhibits the onset of mold and bacteria thanks to the Microban® protection system
- Thin - just 0,5 mm of finished thickness
- Safe - it contains no solvents and is non-flammable
- Anti-fracture protection, for cracks up to 3 mm in width
- Permits direct bonding of ceramic, stone and marble

TECHNICAL CHARACTERISTICS

- Classification EN 14891: DM O1 P
- Positive pressure resistance (7 days): ~ 1.5 bar
- Crack-bridging ability: ~ 3 mm
- Wait for applying second coat: ~ 3 hours
- Wait for laying tiles: ~ 3 hours

INTENDED USE

- For indoor and outdoor use
- Swimming pools, fountains, shower cubicles, areas surrounding pools, bathrooms, commercial, industrial and residential kitchens and laundries
- Spas, whirlpools and steam rooms
- Kitchens and food processing areas; balconies and terraces
- Concrete, cement-based screeds and plasters
- Drywall, wood and fiber-cement panels

CE MARKING

CE EN14891
DM O1 P

CONSUMPTION

~ 0.8 l/m²

SHELF LIFE


24 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
S-09235-NS-06	9235 WATERPROOFING MEMBRANE	BLACK	23 l/pail	36 pails
KIT-9235	9235 WATERPROOFING MEMBRANE KIT	BLACK+WHITE	Kit (23 l pail + 2 rolls of ANTI-FRACTURE FABRIC)	-

AQUA BARRIER

Two-component flexible cement-based waterproofing membrane



PRODUCT DESCRIPTION

AQUA BARRIER is a two-component flexible elastomer coating modified with polymers that waterproofs and protects concrete, masonry, bricks and some natural stone substrates, with a crack-bridging capacity. LIMITATIONS: when waterproofing terraces, balconies and swimming pools, use AQUA BARRIER NET to improve performance. AQUA BARRIER needs to be reinforced with WPM TAPE or WPM TAPE PLV at all the construction joints, wall-wall and wall-floor corners.

FEATURES & BENEFITS

- Easy to apply
- Flexible
- Anti-fracture protection, for cracks with up to 1 mm of movement
- Ideal for balconies, terraces and swimming pools when used with AQUA BARRIER NET

TECHNICAL CHARACTERISTICS

- Classification EN 14891: CM P
- Workability time: ~ 60 min
- Max. thickness per coat: ~ 2 mm
- Positive pressure resistance (7 days): ~ 1.5 bar
- Crack-bridging ability: ~ 1.1 mm
- Wait for applying second coat: ~ 4 hours
- Wait for laying tiles: ~ 24 hours

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Balconies, terraces, showers and pools
- Concrete, cement-based screeds and plasters
- Drywall and fiber-cement panel
- Non-treated old ceramic tiles and natural stone

CE MARKING

CE EN14891
CM P

CONSUMPTION

3-4 kg/m² with 2.5-3 mm of thickness

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000007010	AQUA BARRIER Part A	GREY POWDER	25 kg/bag	48 bags
L0000000000007030	AQUA BARRIER Part B	LIQUID	8 kg/pail	48 pails
N0000000000007000	AQUA BARRIER Mini Kit	GREY POWDER + LIQUID	16,5 kg kit (A: 2 x 6.25 kg + B: 4 kg)	27 pails

AQUA BARRIER RDY TOP

One-component, flexible, cement-based waterproofing agent for waterproofing the substrate before installing ceramic tiles and natural stone with adhesives. For protecting concrete



PRODUCT DESCRIPTION

Adheres tightly to the substrate ensuring hydraulic sealing before applying the cladding (EN 14891). Protect concrete and cement-based surfaces from penetration of water and CO₂ (EN 1504-2).

For waterproofing swimming pools, fountains, balconies, terraces, foundations, concrete earth retaining walls, channels and eaves.

For elastic skim coating of plasters and micro-cracked screeds.

For visible applications, UV resistant.

FEATURES & BENEFITS

- One-component
- Flexible, easy to apply by notched trowel, roller or brush even vertically
- Prevents carbonation of concrete
- Anti-fracture protection, for cracks with up to 1 mm of movement
- Ideal for balconies, terraces and swimming pools
- Waterproofs without removing the old floor
- Resistant to UV and most common aqueous solutes (salts, ammonium, ...)
- Can be used in negative response up to 250 kPa

TECHNICAL CHARACTERISTICS

- Classification EN 14891: CM O1P
- Classification EN 1504-2: principles PI-MC-IR-RC
- Workability time: ~ 40 min
- Max. thickness per coat: ~ 2 mm
- Positive pressure resistance (7 days): ~ 1.5 bar
- Reverse pressure resistance: ~ 250 kPa
- Crack-bridging ability at -5°C: ~ 0.8 mm
- Wait for applying second coat: ~ 4 hours
- Wait for laying tiles: ~ 24 hours

INTENDED USE

- Indoor, outdoor
- Wall, floor; balconies, terraces, showers and pools
- Concrete, cement-based screeds and plasters
- Drywall and fiber-cement panel
- Non-treated old ceramic tiles and natural stone

CE MARKING

CE EN14891
CM O1 P
EN 1504-2

CONSUMPTION

~ 1.2 kg/m² per mm of thickness

ADHESION

Initial adhesion: 2.0 MPa

Adhesion after immersion in water:
~ 1.5 MPa

Adhesion after immersion in water
of lime: ~ 1.5 MPa

SHELF LIFE

12 months




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-07001-E020-K	AQUA BARRIER RDY TOP	GREY	20 kg/bag	60 bags

AQUA BARRIER RDY

Single-component elastic cement-based waterproofer, permeable to vapor



PRODUCT DESCRIPTION

AQUA BARRIER RDY is a flexible elastomer coating modified with polymers that waterproofs and protects concrete, masonry, bricks and some natural stone substrates, with a crack-bridging capacity.

LIMITATIONS: when waterproofing terraces, balconies and swimming pools, use AQUA BARRIER NET to improve performance. AQUA BARRIER RDY needs to be reinforced with WPM TAPE or WPM TAPE PLV at all the construction joints, bends and cracks. AQUA BARRIER RDY is permeable to vapor.

FEATURES & BENEFITS

- Easy to apply, applicable with a brush
- It bonds to difficult backings
- Resistant to negative hydraulic pressure ≤ 1.5 bar
- Ideal for balconies, terraces and swimming pools when used with AQUA BARRIER NET

TECHNICAL CHARACTERISTICS

- Classification EN 14891: CM P
- Workability time: ~ 40 min
- Max. thickness per coat: ~ 2 mm
- Positive pressure resistance (7 days): ~ 1.5 bar
- Resistant to negative hydraulic pressure ≤ 1.5 bar
- Crack-bridging ability: ~ 0.8 mm
- Wait for applying second coat: ~ 4 hours
- Wait for laying tiles: ~ 24 hours

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Balconies, terraces, showers and pools
- Concrete, cement-based screeds and plasters
- Drywall and fiber-cement panel
- Non-treated old ceramic tiles and natural stone

CE MARKING



CONSUMPTION


~ 1.2 kg/m² per mm of thickness

SHELF LIFE

12 months




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000007000	AQUA BARRIER RDY	GREY	20 kg/bag	48 bags

HYDRO BAN® SHEET MEMBRANE

High performance waterproof membrane and preformed waterproofed collars and corners



PRODUCT DESCRIPTION

HYDRO BAN® SHEET MEMBRANE and the preformed collars and corners are installed using a LATICRETE adhesive. Thanks to their polymeric structure, the membrane, collars and corners can also be used as a vapor barrier / waterproofing membrane for applications in saunas and steam rooms.

FEATURES & BENEFITS

- Robust and flexible, it easily adapts
- Can be installed on uncured screeds
- Installed with class C1 or C2 adhesives
- Supplements waterproofing products
- Available in rolls, corners and collars

TECHNICAL CHARACTERISTICS

- Thickness: ~ 0.7 mm
- Wait for laying tiles: none

INTENDED USE


- Indoors
- Wall, floor
- Bathrooms, showers, kitchens, saunas and steam rooms
- Concrete, cement-based screeds and plasters
- Drywall and fiber-cement panel
- Non-treated old ceramic tiles and natural stone

ROLLS

- 1 m x 10 m = 10 m²
- 1 m x 30 m = 30 m²




TOOLS

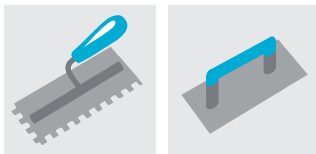

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L29978	HYDRO BAN® SHEET MEMBRANE	GREY	10 m roll	75 rolls
L29979	HYDRO BAN® SHEET MEMBRANE	GREY	30 m roll	36 rolls
L51459	HYDRO BAN® PREFORMED IC	GREY	25 pcs/box	-
L51460	HYDRO BAN® PREFORMED OC	GREY	25 pcs/box	-
L28846	HYDRO BAN® FLOOR COLLARS	GREY	25 pcs/box	-
L51461	HYDRO BAN® COLLAR 250 mm	GREY	25 pcs/box	-
L29870	HYDRO BAN® COLLAR 120 mm	GREY	25 pcs/box	-

HYDRO BAN® PREFORMED IC & OC HYDRO BAN® FLOOR COLLARS & COLLAR

Special pieces preformed in a vapor barrier waterproofing membrane for waterproofing the critical points of the substrate before installing ceramic tiles and natural stone with adhesives

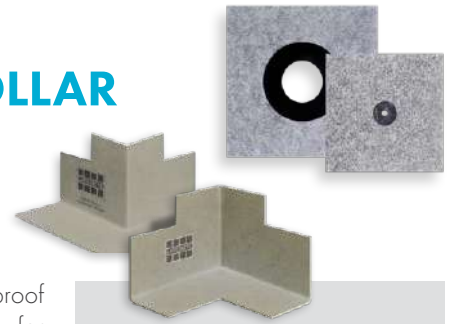

PRODUCT DESCRIPTION

Preformed special pieces made with a vapor barrier waterproof membrane coated on both sides with non-woven polyester for waterproofing: inner corners, outer corners, plant engineering passages, and connecting with drain systems

FEATURES & BENEFITS

- Fast and easy installation, they ensure an immediate seal
- Robust and flexible, they easily adapt
- They avoid making complicated special pieces on the spot
- No waiting for installing the cladding

TECHNICAL CHARACTERISTICS

- Thickness: ~ 0.7 mm
- Wait for laying tiles: none
- Collar: 120 x 120 mm hole 7 mm in diameter
- Floor Collar: 250 x 250 mm hole 64 mm in diameter

INTENDED USE

- Indoors
- Wall, floor
- Balconies, terraces, showers
- Waterproofing of joints, edges and elevation changes in waterproofing systems under tiles AQUA BARRIER

CORNERS

- Inner corner (IC)
- Outer corner (OC)

COLLARS

- 250 x 250 (64 mm diameter)
- 120 x 120 (7 mm diameter)

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
				See page 36

WPM TAPE

Elastomeric waterproofing tape and band for expansion joints

PRODUCT DESCRIPTION

Alkali-resistant, self-adhesive, elastic, waterproof tape made of butyl rubber coated on both faces with non-woven polyester for waterproofing expansion joints, perimeter joints, edges and points of water runoff in waterproofing under tiles with AQUA BARRIER membranes.

BENEFITS AND FEATURES

- Easy to apply, the entire width of the tape is waterproof and elastic, making it easy to apply
- Alkali-resistant
- Elastic
- It is glued with all the cement-based waterproofer in the LATICRETE range

TECHNICAL CHARACTERISTICS

- Width: ~ 120 mm
- Thickness: ~ 0.66 mm
- Positive pressure resistance (7 days): ~ 1.5 bar

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Balconies, terraces, showers and pools
- Waterproofing of joints, edges and elevation changes in waterproofing systems under tiles AQUA BARRIER



CERTIFICATIONS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L29071	WPM TAPE	GREY	50 m roll	100 rolls

WPM TAPE PLV

Elastomeric waterproofing tape and band for expansion joints



PRODUCT DESCRIPTION

Alkali-resistant, self-adhesive, elastic, waterproof tape made of butyl rubber coated on both faces with non-woven polyester for waterproofing expansion joints, perimeter joints, edges and points of water runoff in waterproofing under tiles with AQUA BARRIER membranes.

FEATURES & BENEFITS

- Easy to apply
- Alkali-resistant
- WPM TAPE PLV is self-adhesive
- It supplements the HYDRO BAN, AQUA BARRIER and AQUA BARRIER RDY products

TECHNICAL CHARACTERISTICS

- Width: ~ 120 mm
- Thickness: ~ 0.77 mm
- Positive pressure resistance (7 days): ~ 0.2 bar

INTENDED USE

- Indoors
- Wall, floor
- Balconies, terraces, showers
- Waterproofing of joints, edges and elevation changes in waterproofing systems under tiles AQUA BARRIER


CERTIFICATIONS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L28753	WPM TAPE PLV	GREY	10 m roll	500 rolls

AQUA BARRIER NET

Fiber reinforcement mesh for cement-based waterproofing systems

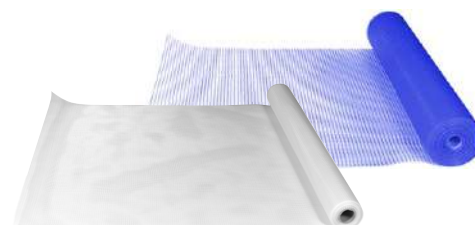

PRODUCT DESCRIPTION

AQUA BARRIER NET is an alkali-resistant glass-fiber mesh with an anti-wrinkle treatment, specific for reinforcing AQUA BARRIER waterproofing membranes and plasters.

BENEFITS AND FEATURES

- Reinforced fiber
- Easy to use, anti-wrinkle
- Alkali-resistant
- For claddings (ETAG 004 certified)
- Reduces cracks and splits in the membrane

TECHNICAL CHARACTERISTICS

- Mesh size, e.g.: 1x1 cm
- Grammage, e.g.: 95 g/m²

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Balconies, terraces, showers and pools
- Reinforcement for AQUA BARRIER membranes, shaving and plastering


ROLL DIMENSIONS

50 m x 1 m

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
RET01-1010	AQUA BARRIER NET 95 g/m ²	WHITE	50 m roll	45 rolls
RET01-1020G	AQUA BARRIER NET 125 g/m ²	BLUE	50 m roll	-

LATAPOXY® WATERPROOFING FLASHING MORTAR

Epoxy-based waterproofing membrane



MICROBAN®



PRODUCT DESCRIPTION

LATAPOXY® WATERPROOFING FLASHING MORTAR is a three-component epoxy product designed specifically to be applied with a notched trowel like a waterproofing membrane. It can be used to waterproof seams, gaps or joints between different types of substrates, metal and pipe penetrations made of PVC. It is specifically designed to be used before laying ceramic and stone material in all cases requiring a fast waterproofing treatment.

FEATURES & BENEFITS

- Fast setting - allows rapid laying of tiles/stone
- High adhesion and flexibility
- Easy to apply with a notched trowel
- Adheres to pipes made of metal, PVC, drain pipes
- For waterproofing points of contract between different materials (steel-concrete)

TECHNICAL CHARACTERISTICS

- Max. thickness: ~ 3 mm
- Wait for laying tiles: ~ 24 hours

INTENDED USE

- For indoor and outdoor use
- Swimming pools, fountains, shower cubicles, areas surrounding pools, bathrooms, commercial, industrial and residential kitchens and laundries
- Spas, whirlpools and steam rooms
- Kitchens and food processing areas
- Concrete, cement-based screeds and plasters
- Drywall, wood and fiber-cement panels
- Panels made of wood, metal, PVC

YIELD PER PACKAGE

4.2 m² with 3 mm of thickness
~1.7 kg per liter of cavity

SHELF LIFE


24 months



CERTIFICATIONS




TOOLS

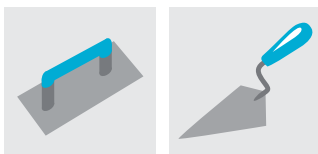

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-0024-0001-2	LATAPOXY® WATERPROOF FLASHING MORTAR	WHITE	7.2 kg/kit	48 kits

DECOUPLING MAT 2.0

Decoupling and waterproofing membrane



PRODUCT DESCRIPTION

DECOUPLING MAT 2.0 is a three-ply decoupling membrane used to protect ceramic floors from movements of the substrate in commercial and residential settings. It permits fast installation and protects the floor underneath the tiles from the passage of moisture and the formation or presence of cracks.

FEATURES & BENEFITS

- Waterproofing when used with sealing tapes and adequate system components
- Vapor pressure equalization layer to contain the moisture of the substrate
- Absorbs the movement of the subfloor and prevents cracks from spreading to the tile
- Lightweight, easy to carry and fast to install with standard tools
- The thin membrane enables making the anti-fracture system without increasing the total thickness
- It is applied to the substrate with a normal adhesive for tiles modified with a polymer (C2)

TECHNICAL CHARACTERISTICS

- Thickness: approximately 1.8 mm


INTENDED USE

- Indoor, outdoor
- Concrete, screeds
- Old ceramic or natural stone floors
- Fiber-cement panels, calcium silicate panels
- Plywood or particle board panels




SHELF LIFE

5 years

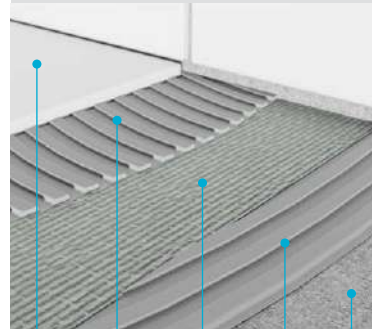


Tiles / Stone
LATICRETE adhesive for tiles
DECOUPLING MAT 2.0
LATICRETE adhesive for tiles
Support



Absorption of the movement due to cracking

The movement of cracks in the substrate or their forming after laying is not transferred to the tiles and therefore does not jeopardize stability




Vapor management

The air channels remain open, allowing the water vapor to escape and permitting installation on substrates that are not perfectly dry



Thinner system

Thanks to its shallow thickness (0.87 mm) it is ideal for renovations



Faster installation

Can be used on screeds or concrete that are damp or not completely cured, with no risk of transmitting curing or moisture related movements



Noise impact reduction


When correctly installed, the decoupling membranes can reduce the transmission of foot noise



Waterproofing

Can be used as waterproofing if sealed correctly (refer to the product data sheet for details)

TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000012010	DECOUPLING MAT 2.0	WHITE	15 m ² roll	20 rolls



The image features a close-up, high-angle view of a stack of corrugated cardboard. The fluted, wavy structure of the cardboard is the primary focus, with light and shadow highlighting its texture. A semi-transparent teal rectangular overlay is positioned on the right side of the image. Centered within this teal area is the word "ADHESIVES" in a bold, white, sans-serif font.

ADHESIVES





No matter what application: tiles, stone materials, glass mosaic, including large-sized tile installations, our adhesives are designed to meet your specific needs.

The cement-based adhesives, reactive adhesives and latexes for cement-based adhesives for laying LATICRETE® tiles offer major advantages in terms of speed and productivity during application.



CHOOSE THE RIGHT ADHESIVE

Level of performance ←

			BEST			
			 4237 LATEX ADDITIVE + 211 POWDER	 345 SUPER FLEX	 254 PLATINUM	
Classification EN 12004 C2 TE			S1	S2	S1	
GENERAL CHARACTERISTICS	Additional characteristics			 		
	Maximum thickness		15 mm	20 mm	20 mm	
SPECIFIC APPLICATIONS OR DESTINATIONS	Large format		✓	✓	✓	
	Intense traffic		✓	✓	✓	
PERMITTED APPLICATIONS AND SUBFLOORS	Swimming pool	Waterproofers				
		Outdoors	Concrete			
			Waterproofing			
	Screeds and plasters cement-based					
	Old tiles					
	Indoors	Concrete				
		Waterproofers				
		Heating substrates				
		Screeds and plasters cement-based				
		Fluid screeds ^				
		Drywall				
		Old tiles				

NOTES

- For laying moisture-sensitive natural stone, we recommend solutions that use reactive adhesives with no water in the mixture (LATAPOXY® 300 ADHESIVE, LATALASTIK, etc.).
- The rapid versions of the adhesives are available in series 345, 335 and 325.
- In the case of tiles with a side longer than 30 cm it is required to have the bed full of adhesive and the designer must evaluate the need to prescribe using an appropriate mechanical safety fastener (point 7.13.7 of the standard UNI 11493-1).
- When laying on old tiles, check they are stable and well anchored to the substrate.
- For installation on a facade, the substrate (plaster) must have adhesive bond tensile strength (tear resistance) and adhesion to the underlying support of no less than 1 N/mm² (point 7.13.7 of standard UNI 11493-1).

LEGEND




Low dust



Fiber-reinforced



Lightened



Variable mixture ratio



Antimicrobial technology

T-1100EUR-0823

BETTER			GOOD		
335 MAXI S	335 MAXI LW	335 SUPER FLEX	325 MAXI	325 HIFLEX	325 FLEX
S1 (G)	S1	S1			
20 mm	20 mm	15 mm	15 mm	10 mm	10 mm
✓	✓	✓			
✓	✓	✓			

			NO	NO	NO
*	*	*	NO	NO	NO
			**	**	**
			*	*	*

Length of longest side (cm)

≤ 30	≤ 90	
≤ 60	≤ 120	≤ 360

Use of primer

- * Pretreat the surfaces with PRIMER SUPERIOR.
- ** Referred only to plumbing under screeds.
- ^ Do not use on gypsum or anhydrite based fluid screeds without having treated them in advance with the specific primer: PRIMER PLUS or PRIMER SUPERIOR.

335 MAXI S

High-quality deformable cement-based adhesive



335 MAXI S is a high-quality deformable cement-based adhesive for thicknesses up to 20 mm. Highly flexible, multipurpose and with low dust technology. It is designed for quickly laying stone, ceramic tiles, porcelain stoneware and glass mosaic. It can be used as a thixotropic or self-wetting adhesive and is ideal for large porcelain stoneware slabs and vertical applications.

**THICKNESSES
UP TO 20 mm**

- **Low powderiness and low VOC emissions contribute to improving indoor air quality**
- **No vertical sliding slip makes it ideal for wall use**
- **Can be used in a self-wetting or thixotropic consistency**

254 PLATINUM

The latest evolution of single-component cement-based adhesives reinforced with polymers for laying tiles and stone



MICROBAN



PRODUCT DESCRIPTION

254 PLATINUM is the latest evolution of cement-based adhesives with the addition of superior quality polymers for indoor and outdoor laying of every kind of ceramic, mosaics, natural stone, marble and conglomerates that are not sensitive to moisture. It has a single component and when mixed with water it forms a deformable and thixotropic adhesive with a long open time.

FEATURES & BENEFITS

- Long open time
- Excellent for exterior and pool applications
- Ideal for bonding porcelain and glass tiles
- High adhesion and shear strength
- Creamy smooth formula - excellent workability and easy to use
- Low VOC emissions
- Available in grey or white
- Approved as a valid substitute for the two-component system 4237 LATEX ADDITIVE + 211 POWDER

TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2 TE S1
- Max particle size: ~ 0.5 mm
- Max. thickness: ~ 20 mm
- Walkability: ~ 12 hours
- Initial adhesion: ~ 2.0 N/mm²
- Adhesion after thermal aging: ~ 2.6 N/mm²
- Adhesion after freeze-thaw cycles: ~ 2.0 N/mm²
- Transverse strain: ~ 3 mm

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel, wood panels for outdoor use
- Plastic and vinyl laminates (indoor only)

CE MARKING

CE EN12004
C2 TE S1

CONSUMPTION

4 kg/m² - notched trowel 10x10 mm
7 kg/m² - notched trowel 15 mm

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001310	254 PLATINUM	GREY	25 kg/bag	48 bags
L0000000000001320	254 PLATINUM	WHITE	25 kg/bag	48 bags

4237 LATEX ADDITIVE + 211 POWDER

High-quality cement-based adhesive system, two-component, flexible, reinforced with latex, can be used in thicknesses from 3 mm up to 15 mm



PRODUCT DESCRIPTION

4237 LATEX ADDITIVE + 211 POWDER is designed to make adhesives modified with latex for laying in thin and medium layers, high strength.

This system can be used to install every kind of ceramic tile, natural stone and conglomerate and it improves performance compared to traditional materials.

FEATURES & BENEFITS

- Frost and weather resistant for indoor and outdoor use, in every kind of climate
- High adhesion and mechanical strength
- Flexible and impact resistant - classified for very heavy traffic conditions
- Proven performance - used in every kind of application for over 65 years
- Safe, economical and easy to use with low VOC emissions
- Can be used as a slurry coat

TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2 TE S1
- Max particle size: ~ 0.5 mm
- Max. thickness: ~ 15 mm
- Walkability: ~ 24 hours
- Initial adhesion: ~ 3.8 N/mm²
- Adhesion after thermal aging: ~ 4.2 N/mm²
- Adhesion after freeze-thaw cycles: ~ 3.2 N/mm²

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel



CE MARKING

CE EN12004
4237 : C2 TE S1

CONSUMPTION

5-6 kg/m² - notched trowel 10x10 mm
7-8 kg/m² - notched trowel 15 mm

SHELF LIFE

211 POWDER: 12 months
4237 LATEX ADDITIVE: 5 years




CERTIFICATIONS



ASTM

TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000006031	4237 LATEX ADDITIVE	WHITE	6.25 kg/pail	48 pails
L0000000000006030	4237 LATEX ADDITIVE	WHITE	20 kg/pail	36 rolls
L0000000000001350	211 POWDER	GREY	25 kg/bag	48 pails
L0000000000001360	211 POWDER	WHITE	25 kg/bag	48 pails

345 SUPER FLEX

Extremely high quality deformable and super flexible adhesive, for thicknesses up to 20 mm



PRODUCT DESCRIPTION

345 SUPER FLEX is a multipurpose adhesive, reinforced with polymers for high deformability. Ideal for laying large porcelain stoneware slabs and exterior, wall and floor applications.

FEATURES & BENEFITS

- Excellent performance and strength
- Prolonged pot life
- Low VOC emissions
- Low dust
- Ideal for vertical applications and for large formats
- For thicknesses up to 20 mm

TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2 TE S2
- Max particle size: ~ 0.3 mm
- Max. thickness: ~ 20 mm
- Walkability: ~ 12 hours
- Initial adhesion: ~ 2.1 N/mm²
- Adhesion after thermal aging: ~ 3.1 N/mm²
- Adhesion test Open time: ~ 2.5 N/mm²
- Transverse strain: ~ 5.6 mm

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel, wood panels for outdoor use
- Plastic and vinyl laminates (indoor only)
- Thixotropic

CE MARKING

CE EN12004
C2 TE S2

CONSUMPTION

1.5 kg/m² - notched trowel 4 mm
3 kg/m² - notched trowel 8 mm
3.5-4 kg/m² - notched trowel 10 mm
7-8 kg/m² - notched trowel 20 mm

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001390	345 SUPER FLEX	GREY	25 kg/bag	48 bags
L0000000000001400	345 SUPER FLEX	WHITE	25 kg/bag	48 bags

345 RAPID S

Extremely high quality deformable and super flexible adhesive, for thicknesses up to 30 mm



PRODUCT DESCRIPTION

345 RAPID S is a fast setting multipurpose adhesive for thin and medium bed installations. It is ideal for installations of very large sized technical porcelain stoneware.

FEATURES & BENEFITS

- Excellent performance
- Low dust
- No vertical sliding slip - ideal for vertical applications and for large formats
- Fast setting - 3 - 4 hours for grouting
- Excellent workability - easy to use

TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2F TE S2
- Max particle size: ~ 0.3 mm
- Max. thickness: ~ 30 mm
- Walkability: ~ 4 hours
- Initial adhesion: ~ 2.6 N/mm²
- Adhesion after thermal aging: ~ 3.3 N/mm²
- Adhesion test Open time: ~ 2.3 N/mm²
- Transverse strain: ~ 6.3 mm

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel, wood panels for outdoor use
- Plastic and vinyl laminates (indoor only)
- Thixotropic

CE MARKING



CONSUMPTION


~ 3.5 kg/m² - notched trowel 8 mm
4-8 kg/m² - notched trowel 15 mm

SHELF LIFE


12 months



CERTIFICATIONS



TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001430	345 RAPID S	GREY	25 kg/bag	48 bags
L0000000000001440	345 RAPID S	WHITE	25 kg/bag	48 bags

335 MAXI S

High-quality, deformable, cement-based adhesive, for thicknesses up to 20 mm



PRODUCT DESCRIPTION

335 MAXI S is a highly flexible adhesive, multipurpose with low powderiness, designed for quickly installing stone and ceramic tiles, porcelain and glass; 335 MAXI S is ideal for large format tiles and ideal for vertical applications.

FEATURES & BENEFITS

- Little dust and low VOC emissions - better indoor air quality
- Excellent workability - multi-consistency
- No vertical sliding slip
- Ideal for large-sized tiles
- Long open time
- Available in ultra white and grey

TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2 TE S1
- Max particle size: ~ 0.3 mm
- Max. thickness: ~ 20 mm
- Walkability: ~12 hours
- Initial adhesion: ~1.6 N/mm²

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel, wood panels for outdoor use

CE MARKING

CE EN12004
C2 TE S1

CONSUMPTION

4 kg/m² - notched trowel 10x10 mm
7-8 kg/m² - notched trowel 15x20 mm

SHELF LIFE


12 months



CERTIFICATIONS



TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001270	335 MAXI S	GREY	25 kg/bag	48 bags
L0000000000001280	335 MAXI S	ULTRA WHITE	25 kg/bag	48 bags

335 MAXI LW

High-quality lightened cement-based adhesive, for thicknesses up to 15 mm



PRODUCT DESCRIPTION

335 MAXI LW is a lightweight adhesive with low powderiness polymer reinforced with excellent performance and high yield. It can be used for laying porcelain stoneware tiles, ceramic tiles and stones that are not moisture sensitive. 335 MAXI LW has been formulated for fast and reliable installation of tiles and stones in many applications.

FEATURES & BENEFITS

- For applications in damp or submerged settings
- No vertical sliding slip
- Thixotropic, highly flexible
- Low dust and low VOC emissions
- Excellent workability - double consistency
- Available in ultra white and grey versions

TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2 TE S1
- Max particle size: ~ 0.3 mm
- Apparent density: ~ 800 kg/m³
- Max. thickness: ~ 15 mm
- Walkability: ~ 12 hours

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel, wood panels for outdoor use

CE MARKING

CE EN12004
C2 TE S1

CONSUMPTION

2 kg/m² - notched trowel 8 mm
3-4 kg/m² - notched trowel 15 mm

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001460	335 MAXI LW	GREY	15 kg/bag	48 bags
L0000000000001470	335 MAXI LW	ULTRA WHITE	15 kg/bag	48 bags

335 SUPER FLEX

High-quality, deformable, flexible, cement-based adhesive, for thicknesses up to 15 mm



PRODUCT DESCRIPTION

335 SUPER FLEX is a highly flexible fiber-reinforced glue. It has been formulated for fast and reliable installation of tiles, ideal for vertical applications.

FEATURES & BENEFITS

- For damp or submerged settings
- Fiber-reinforced with high flexibility
- No vertical sliding slip - ideal for wall
- Low VOC emissions
- Ideal for large formats
- For heating screeds

TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2 TE S1
- Max particle size: ~ 0.5 mm
- Max. thickness: ~ 15 mm
- Walkability: ~ 12 hours
- Initial adhesion: ~ 2.8 N/mm²
- Adhesion after thermal aging: ~ 2.9 N/mm²

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel, wood panels for outdoor use

CE MARKING

CE EN12004
C2 TE S1

CONSUMPTION


3.5-6 kg/m² - notched trowel 6x10 mm
7-8 kg/m² - notched trowel 15x20 mm

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001230	335 SUPER FLEX	GREY	25 kg/bag	48 bags
L0000000000001240	335 SUPER FLEX	WHITE	25 kg/bag	48 bags

335 RAPID

High-quality fast-acting cement-based adhesive, for thicknesses up to 15 mm



PRODUCT DESCRIPTION

335 RAPID is a flexible adhesive modified with polymer for thin and medium bed installations.

Thanks to its fast hydration it is easy to use, ideal for projects with time constraints and excellent for moisture sensitive stones.

FEATURES & BENEFITS

- Low VOC emissions
- Flexible
- Excellent workability - easy to use
- Ready for grouting in 3 hours
- For natural stones
- Ultra white - ideal for translucent marbles or marbles subject to staining

TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2 FT S1
- Max particle size: ~ 0.3 mm
- Max. thickness: ~ 15 mm
- Workability time: ~ 45 min
- Walkability: ~ 3 hours
- Initial adhesion: ~ 1.8 N/mm²

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel, wood panels for outdoor use

CE MARKING

CE EN12004
C2 FT S1

CONSUMPTION

3-6 kg/m² - notched trowel 8x10 mm
5-7 kg/m² - notched trowel 10x20 mm

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001200	335 RAPID	ULTRA WHITE	25 kg/bag	48 bags
L0000000000001201	335 RAPID MINI KIT	ULTRA WHITE	2x5 kg/pail	52 pails

335 RAPID FL

High-quality flexible deformable fast-acting cement-based adhesive, for thicknesses up to 20 mm



PRODUCT DESCRIPTION

335 RAPID FL is a fast setting flexible adhesive modified with polymers, for thin and medium bed installations. It is easy to use, self-wetting and ideal for installing large format tiles or areas subject to intense traffic.

FEATURES & BENEFITS

- Anti-dust
- Flexible and high strength
- Fluid consistency - no need for double coating
- Designed for very large formats
- For places subject to great stresses
- Ready for grouting in 3 hours

TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2F S1
- Max particle size: ~ 0.5 mm
- Max. thickness: ~ 20 mm
- Workability time: ~ 60 hours
- Walkability: ~ 6 hours
- Initial adhesion: ~ 2.9 N/mm²
- Adhesion after thermal aging: ~ 2.9 N/mm²

INTENDED USE

- Indoor, outdoor
- Floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel, wood panels for outdoor use

CE MARKING

CE EN12004
C2F S1

CONSUMPTION


3-6 kg/m² - notched trowel 8x10 mm
5-7 kg/m² - notched trowel 10x20 mm

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001500	335 RAPID FL	GREY	25 kg/bag	48 bags

325 MAXI

Medium-bed flexible cement-based adhesive, for thicknesses up to 15 mm



PRODUCT DESCRIPTION

325 MAXI is a cement-based adhesive modified with polymers, designed for fast and easy installation of ceramic, porcelain, glass tiles and stones that are not moisture sensitive.

Its unique formula features high resistance to slipping, enabling installation on vertical surfaces from the top downwards.

FEATURES & BENEFITS

- High resistance to slipping - ideal for walls and large format tiles
- Excellent workability - easy to use with a smooth creamy consistency
- Low VOC emissions
- Thixotropic
- Long open time
- Ideal for glass mosaic and stones that are not moisture sensitive
- Available in grey and ultra white - the white version contains no sand, it is ideal for glass mosaic

TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2 TE
- Max particle size: ~ 0.5 mm
- Max. thickness: ~ 15 mm
- Workability time: ~ 3 hours
- Walkability: ~ 12 hours
- Initial adhesion: ~ 2.1 N/mm²
- Adhesion after thermal aging: ~ 1.9 N/mm²

INTENDED USE

- Indoor, outdoor
- Floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel



CE MARKING

CE EN12004
C2 TE

CONSUMPTION


4-6 kg/m² - notched trowel 8x10 mm
7-8 kg/m² - notched trowel 15x20 mm

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001120	325 MAXI	GREY	25 kg/bag	48 bags
L0000000000001130	325 MAXI	ULTRA WHITE	25 kg/bag	48 bags

325 HIFLEX

Highly flexible cement-based adhesive, for thicknesses up to 10 mm



PRODUCT DESCRIPTION

325 HIFLEX is a cement-based adhesive modified with polymers, for fast and easy installation of ceramic, porcelain stoneware, glass tiles and stones that are not moisture sensitive. Its unique formula is designed for quickly installing tiles with high slip resistance. White 325 HIFLEX has no silica sand and has a smooth consistency, easy to trowel, ideal for installing glass mosaics.

FEATURES & BENEFITS

- No vertical sliding slip
- Excellent workability - easy to use
- Low VOC emissions
- Long open time
- Ideal for ceramic tiles, porcelain stoneware, glass, mosaics and stones that are not moisture sensitive
- Available in white and grey

TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2 TE
- Max particle size: ~ 0.5 mm
- Max. thickness: ~ 10 mm
- Workability time: ~ 3 hours
- Walkability: ~ 12 hours
- Initial adhesion: ~ 2.1 N/mm²
- Adhesion after thermal aging: ~ 1.9 N/mm²

INTENDED USE

- Indoor, outdoor
- Floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel

CE MARKING

CE EN12004
C2 TE

CONSUMPTION


4-6 kg/m² - notched trowel 8x10 mm
7-8 kg/m² - notched trowel 15x20 mm

SHELF LIFE


12 months



CERTIFICATIONS



TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001080	325 HIFLEX	GREY	25 kg/bag	48 bags
L0000000000001090	325 HIFLEX	ULTRA WHITE	25 kg/bag	48 bags

325 FLEX

Flexible cement-based adhesive, for thicknesses up to 10 mm



PRODUCT DESCRIPTION

325 FLEX is a flexible cement-based adhesive designed for fast and easy installation of ceramic, porcelain and stones that are not moisture sensitive.

FEATURES & BENEFITS

- No vertical sliding slip
- Excellent workability - easy to use
- Low VOC emissions
- Long open time
- Ideal for ceramic tiles, porcelain stoneware and stones that are not moisture sensitive
- Available in white and grey


TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2 TE
- Max particle size: ~ 0.5 mm
- Max. thickness: ~ 10 mm
- Workability time: ~ 3 hours
- Walkability: ~ 12 hours

INTENDED USE

- Indoor, outdoor
- Floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel

CE MARKING



CONSUMPTION

4-6 kg/m² - notched trowel 8x10 mm
7-8 kg/m² - notched trowel 15x20 mm

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001520	325 FLEX	GREY	25 kg/bag	48 bags
L0000000000001510	325 FLEX	WHITE	25 kg/bag	48 bags

325 RAPID

Fast-setting adhesive, for thicknesses up to 15 mm



PRODUCT DESCRIPTION

325 RAPID is a fast setting adhesive for thin and medium bed installations. It is ideal for projects with time constraints - grouting possible in 2 to 3 hours.

FEATURES & BENEFITS

- Low VOC emissions
- Highly flexible
- Walkable after 2-3 hours
- Ideal for porcelain stoneware and stones that are moisture sensitive

TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2 F
- Max particle size: ~ 0.5 mm
- Max. thickness: ~ 15 mm
- Workability time: ~ 30 min
- Walkability: 3 hours
- Initial adhesion: ~ 1.8 N/mm²
- Adhesion after thermal aging: ~ 1.8 N/mm²

INTENDED USE

- Indoor, outdoor
- Floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel

CE MARKING

CE EN12004
C2 F

CONSUMPTION

3-6 kg/m² - notched trowel 8x10 mm
5-7 kg/m² - notched trowel 10x15 mm

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001190	325 RAPID	GREY	25 kg/bag	48 bags

73 CRETE ADMIX + 211 POWDER

Flexible two-component cement-based adhesive system reinforced with latex



PRODUCT DESCRIPTION

73 CRETE ADMIX + 211 POWDER is a high performance cement-based adhesive system reinforced with latex specifically formulated for installing ceramic tiles, natural stone and mosaics of every kind. Mortars for laying tiles made with 73 CRETE ADMIX are more flexible and stronger than traditional cement-based adhesives.

FEATURES & BENEFITS

- Versatile - for interiors and exteriors, walls, floors and ceilings
- Excellent for use in swimming pools, fountains and water parks
- Ideal for glass and porcelain stoneware
- No water is needed - 73 CRETE ADMIX used in place of water
- Safe and easy to install
- Low VOC emissions
- High flexibility
- Highly resistant to thermal shock and the weather
- The 73 CRETE ADMIX + 211 POWDER system is IMO-MED certified and complies with EN 12004 C2 TE


TECHNICAL CHARACTERISTICS

- Classification EN 12004: C2 TE
- Max particle size: ~ 0.5 mm
- Max. thickness: ~ 15 mm
- Walkability: ~ 12 hours
- Initial adhesion: ~ 3.7 N/mm²
- Adhesion after thermal aging: ~ 3.7 N/mm²
- Adhesion after freeze-thaw cycles: ~ 3.4 N/mm²


INTENDED USE

- Indoor, outdoor
- Wall, floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel

CERTIFICATIONS



TOOLS



CE MARKING



CONSUMPTION

- 5-6 kg/m² - notched trowel 10x10 mm
- 5-6 kg/m² - notched trowel 15 mm

SHELF LIFE


- 211 POWDER: 12 months
- 73 CRETE ADMIX: 2 months



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000006040	73 CRETE ADMIX	WHITE	20 kg/pail	36 pails
L0000000000001350	211 POWDER	GREY	25 kg/bag	48 bags
L0000000000001360	211 POWDER	WHITE	25 kg/bag	48 bags

315 PLUS

Cement-based adhesive with a long open time



PRODUCT DESCRIPTION

315 PLUS is a cement-based adhesive for thin bed installations with excellent workability and a long open time.

LIMITATIONS: When used in swimming pools, cold storage rooms, prefabricated facilities, heated floors, floors subjected to heavy loads, fortify with latex to enhance performance.

Contact Technical Support for further information.

FEATURES & BENEFITS

- For indoor and outdoor use
- No vertical slip
- Excellent workability and easy to use
- Mix with latex to enhance performance; contact technical support for further information
- Available in white and grey

TECHNICAL CHARACTERISTICS

- Classification EN 12004: C1 TE
- Max particle size: ~ 0.5 mm
- Max. thickness: ~ 10 mm
- Workability time: ~ 3 hours
- Walkability: ~ 12 hours
- Initial adhesion: ~ 0.8 N/mm²
- Adhesion after thermal aging: ~ 0.8 N/mm²

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel

CE MARKING

CE EN12004
C1 TE

CONSUMPTION

4 kg/m² - notched trowel 10x10 mm
7 kg/m² - notched trowel 15 mm

SHELF LIFE


12 months



CERTIFICATIONS



TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001040	315 PLUS	GREY	25 kg/bag	48 bags
L0000000000001050	315 PLUS	WHITE	25 kg/bag	48 bags

4237 LATEX ADDITIVE + 211 POWDER




Invented in 1956,

4237 LATEX ADDITIVE, the first additive for mortar and thin-set bed adhesives, a real INNOVATION that has transformed the market of products for laying tiles and stone.

The two-component adhesive that has made the history of LATICRETE®, different to any other system on the market

LATALASTIK

Flexible epoxy-polyurethane adhesive



PRODUCT DESCRIPTION

LATALASTIK is a flexible two-component epoxy-polyurethane adhesive for quickly and safely laying all materials subject to warping caused by water absorption. Its particular water-free composition avoids the risk of irreversible stains on particularly sensitive marbles and deformation of composite marble tiles. It can be laid on porous, non-absorbent and smooth backings (such as cement-based substrates, wood, metal, ceramic, stone) ensuring a long life for the floors and cladding even if subjected to the warping that traditional cement-based adhesives cannot compensate for.

FEATURES & BENEFITS

- Epoxy-polyurethane adhesive with high elasticity - ultra-strong flexible adhesive
- With low emissions of volatile organic substances and solvent-free
- For gluing on a wide variety of substrates
- Laying on gypsum and anhydrite substrates without applying primer in advance
- For all natural stones, modular marbles and composite marble tiles with polyester resins - causes no warping of materials sensitive to water

TECHNICAL CHARACTERISTICS

- Classification EN 12004: R2 T
- Max. thickness: ~ 15 mm
- Workability time: ~ 50 min
- Walkability: ~ 12 hours
- Shear strength: ~ 3.8 N/mm²
- Shear strength after thermal aging: ~ 3.4 N/mm²
- Shear strength after immersion in water: ~ 2.9 N/mm²


INTENDED USE

- Indoor, outdoor
- Wall, floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel, wood panels, honeycomb panels
- Resilient floors, vinyl floors, vinyl adhesive residues
- Metal

CERTIFICATIONS



TOOLS



CE MARKING

CE EN12004
R2 T

CONSUMPTION

2.4-2.6 kg/m² for mosaic and small formats
3.1-3.3 kg/m² for medium formats
5-6 kg/m² for large formats, slabs of marble and stone (double coating)

CONTENTS

4.0 kg Part A + 0.44 kg Part B

SHELF LIFE

12 months



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-1418-0005-A	LATALASTIK (Part A + Part B)	WHITE	4.44 kg/pail (4.0 kg Part A + 0.44 kg Part B)	80 pails

LATAPOXY® 300 ADHESIVE

Epoxy adhesive with high chemical resistance



PRODUCT DESCRIPTION

LATAPOXY® 300 ADHESIVE is a high performance and high resistance epoxy adhesive that adheres to many surfaces, provided they are stable and clean. The adhesive spreads easily and is cleaned with water when fresh. LATAPOXY® 300 ADHESIVE is a three-component kit composed of epoxy resin, hardener and silica filler resistant to chemical agents.

FEATURES & BENEFITS

- For both dry and damp places
- Low VOC emissions
- Cleaned with water - no solvents are required for cleaning tools or finished works
- Ideal for marbles, granite, conglomerates and other moisture sensitive natural stones
- For food processing areas, commercial kitchens and restaurants
- Does not stain pale colored marble
- Adheres to metal

TECHNICAL CHARACTERISTICS

- Classification EN 12004: R2
- Max. thickness: ~ 9 mm
- Workability time: ~ 45 min
- Walkability: ~ 12 hours
- ANSI shear strength: ~ 5 MPa


INTENDED USE

- Indoor, outdoor
- Wall, floor
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel, wood panels
- Resilient floors, vinyl floors, vinyl adhesive residues
- Metal

CERTIFICATIONS



TOOLS



CE MARKING

CE EN12004
R2

CONSUMPTION

2.8 - 3.3 kg/m² - notched trowel
6 x 6 mm

CONTENTS

(1) Kit, includes:
- (2) Part A (1.0 kg)
- (2) Part B (1.9 kg)
- (2) Part C powder (8.2 kg)

SHELF LIFE

24 months



ITEM CODE NUMBER

17-0300-0001-2-M

PRODUCT NAME

LATAPOXY® 300 ADHESIVE

COLOR

WHITE

PACKAGE


11.1 kg/kit

PALLET/PCS

36 kits

LATAPOXY® 310 STONE ADHESIVE

High resistance epoxy adhesive for the "spot bonding" method of tiles and stone on vertical surfaces



PRODUCT DESCRIPTION

LATAPOXY® 310 STONE ADHESIVE is a two-component epoxy adhesive in paste formulated for spot bonding ceramic and stone slabs on vertical surfaces. LATAPOXY® 310 maintains its extraordinary thixotropy also at temperatures close to +35°C (95°F).

FEATURES & BENEFITS

- Approved for outdoor installations in accordance with ICC and IBC building standards
- Non-staining - ideal for white and light-colored marbles and other moisture sensitive natural stones
- Withstands impact and vibration
- Adhesive capacity does not deteriorate over time
- Save - solvent-free
- Low VOC emissions
- Exceptional thixotropy, does not slip if applied with thickness up to 25 mm
- Adheres to metal
- Available in rapid versions (LATAPOXY® 310 RAPID STONE ADHESIVE)

TECHNICAL CHARACTERISTICS

- Classification EN 12004: R2 T
- Max. thickness: ~ 25 mm
- Workability time: ~ 45 min
- ANSI shear strength: ~ 6.3 MPa

INTENDED USE

- Indoor, outdoor
- Wall
- Concrete, plasters and cement-based screeds
- Non-treated old ceramic tiles and natural stone
- Drywall, fiber-cement panel, wood panels
- Metal

CE MARKING

CE EN12004
R2 T

COVERAGE PER PACK 10 L

27-30 m² (adhesive thickness 3 mm)
14-16 m² (adhesive thickness 6 mm)
7-7.5 m² (adhesive thickness 12 mm)
spot bonding method

CONTENTS

5 l Part A + 5 l Part B

SHELF LIFE


24 months



CERTIFICATIONS



TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-S-310AB-NC-10	LATAPOXY® 310 STONE ADHESIVE	BEIGE	Kit (5 l Part A + 5 l Part B)	40 kits

15 PREMIUM ADHESIVE

Adhesive in paste, ready-to-use, non-flammable, made from acrylic resins, for laying indoor cladding



PRODUCT DESCRIPTION

15 PREMIUM ADHESIVE is a white adhesive in paste, ready-to-use, made from acrylic resins, designed for interior installations of ceramic, natural stone (provided it is water stable) and glass mosaic on walls.

Premixed, creamy and with excellent workability, this adhesive is for substrates such as concrete, plasters or panels made from cement, gypsum or drywall and panels made from wood conglomerates.

15 PREMIUM ADHESIVE can be used with tiles of up to 45 cm (length of longer side).

FEATURES & BENEFITS

- Premixed and ready-to-use - no professional tools needed
- Safe and easy to use - non-flammable
- Excellent characteristics of elasticity and adhesion
- No vertical sliding slip
- For a great variety of substrates

TECHNICAL CHARACTERISTICS

- Classification EN 12004: D2 TE
- Workability time: ~ 30 min
- Walkability: ~ 24 hours
- Shear strength: ~ 1.6 N/mm²

INTENDED USE

- Indoors
- Wall, floor
- Concrete, plasters and cement-based screeds
- Drywall, fiber-cement panel



CE MARKING

CE EN12004
D2 TE

CONSUMPTION

3 kg/m² - notched trowel 6 x 6 mm

SHELF LIFE


12 months



CERTIFICATIONS



TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000001476	15 PREMIUM ADHESIVE	WHITE	3 kg/pail	144 pails
L0000000000001478	15 PREMIUM ADHESIVE	WHITE	15 kg/pail	44 pails
L0000000000001479	15 PREMIUM ADHESIVE	WHITE	25 kg/pail	33 pails

HOMM





**GROUTS &
JOINT SEALANTS**



LATICRETE® products for joints and sealants are able to withstand time, wear and the weather, all of which for decades pose a challenge for installers, designers and builders.

LATICRETE sealants for joints for ceramic tiles, stone materials and glass mosaic have been developed to provide the desired characteristics and benefits such as stain resistance, antimicrobial protection and easy cleaning.

All the flexible sealants are designed for excellent performance and have protection to aid resistance to stains, molds and fungi for exterior, interior and submerged applications.



PERMACOLOR® SELECT

High performance rapid cement-based grout



PERMACOLOR® SELECT is the only high performance cement-based grout offering the exclusive patented technology of water-soluble pigments designed for every kind of installation: interior and exterior, residential and commercial, swimming pools

- Quick-setting with long workability, for use on floors and walls
- Very high performance to ensure exceptional color durability
- For all types of cladding: porcelain stoneware, ceramic tiles, natural stone and mosaics


**NO VERTICAL SAG,
NO COLOUR FADING,
NO EXPIRY.**

It is available in two versions:

- **PERMACOLOR® SELECT: for joints from 1.5 mm up to 12 mm**
- **PERMACOLOR® SELECT FINE: for joints up to 6 mm**

PERMACOLOR® SELECT

High performance rapid cement-based grout for joints from 1.5 mm to 12 mm



PRODUCT DESCRIPTION

PERMACOLOR® SELECT is a high performance rapid cement-based grout that was the first to permit coloring with pigments contained in water-soluble pods, the COLOR KIT, to be added to the white base. Easy to mix, use and clean, PERMACOLOR® SELECT is for grout joints on floors, walls and swimming pools.

FEATURES & BENEFITS

- For swimming pools, fountains and other applications in constant immersion
- Low VOC emissions - safe and easy to install
- Requires no additional treatments - contains Stonetech® Sealer Technology
- Contains Microban® anti-microbial protection - mold resistant
- Fiber-reinforced - anti-cracking and anti-shrinkage
- Fast setting – can be walked on after just 3 hours
- Single white base. The color is obtained by mixing the COLOR KIT, available in 52 colors, with water

TECHNICAL CHARACTERISTICS

- Complies with class CG2 WA as per EN 13888
- Max particle size: ~ 0.3 mm
- Workability time: ~ 60 min
- Walkability: ~ 3 hours
- Compressive strength: ~ 30.0 N/mm²
- Water absorption after 30 min: ~ 0.2 g
- Water absorption after 240 min: ~ 1.0 g

INTENDED USE

- Indoor, outdoor, swimming pool
- Wall, floor
- Residential and commercial

CE MARKING

CE EN13888
CG2 - WA

CONSUMPTION

Refer to page 75 for details

SHELF LIFE



24 months



CERTIFICATIONS



TOOLS



PERMACOLOR® SELECT FINE

High performance rapid cement-based fine grout for joints from 1 mm to 6 mm



PRODUCT DESCRIPTION

PERMACOLOR® SELECT FINE is a high performance rapid cement-based fine grout designed for extremely delicate surfaces. Technology with pigments contained in water-soluble pods, COLOR KIT, to be added to the white base. Easy to mix, use and clean, PERMACOLOR® SELECT FINE is a grout for joints on floors, walls and in swimming pools.

FEATURES & BENEFITS

- For swimming pools, fountains and other applications in constant immersion
- Low VOC emissions - safe and easy to install
- Ideal for extremely delicate surfaces such as prefinished marble
- Requires no additional treatments - contains Stonetech® Sealer Technology
- Contains Microban® anti-microbial protection - mold resistant
- Anti-shrinkage and anti-cracking
- Fast setting – can be walked on after just 3 hours
- Single white base. The color is obtained by mixing the COLOR KIT, available in 52 colors, with water

TECHNICAL CHARACTERISTICS

- Complies with class CG2 WA as per EN 13888
- Max particle size: ~ 0.3 mm
- Workability time: ~ 60 min
- Walkability: ~ 3 hours
- Compressive strength: ~ 20.7 N/mm²
- Water absorption after 30 min: ~ 0.2 g
- Water absorption after 240 min: ~ 1.0 g

INTENDED USE

- Indoor, outdoor, swimming pool
- Wall, floor
- Residential and commercial

CE MARKING



CONSUMPTION

Refer to page 75 for details

SHELF LIFE



24 months



CERTIFICATIONS



TOOLS




PERMACOLOR® SELECT




EASY TO MIX COLOR KITS AVAILABLE IN 52 BRIGHT COLORS

Exclusive **COLOR KIT** system that permits coloring with pigments contained in water-soluble pods to be mixed with the unique white neutral base.


- 1
- 2
- 3
- 4
- 5
- 6
- 7




Choose your
COLOR KIT



Melt
the pod



Mixes with the
neutral base
**PERMACOLOR®
SELECT**



And lastly:
GROUTS

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000003100	PERMACOLOR® SELECT	WHITE (base)	5.5 kg bag x 4/box	27 boxes
L0000000000003200	PERMACOLOR® SELECT FINE	WHITE (base)	3.6 kg bag x 6/box	27 boxes
--	PERMACOLOR® SELECT Base + COLOR KIT	--	5.6 kg (bag + COLOR KIT)	-
--	PERMACOLOR® SELECT FINE Base + COLOR KIT	--	3.7 kg (bag + COLOR KIT)	-
24-2603-0040-2	PERMACOLOR® SELECT COLOR KIT	03 SILK	100 g pod	-
24-2604-0040-2	PERMACOLOR® SELECT COLOR KIT	04 BLUE ARCTIC	100 g pod	-
24-2605-0040-2	PERMACOLOR® SELECT COLOR KIT	05 PASTEL BLUE	100 g pod	-
24-2606-0040-2	PERMACOLOR® SELECT COLOR KIT	06 LIMEADE	100 g pod	-
24-2607-0040-2	PERMACOLOR® SELECT COLOR KIT	07 LEMONADE	100 g pod	-
24-2608-0040-2	PERMACOLOR® SELECT COLOR KIT	08 CHERRY RED	100 g pod	-
24-2613-0040-2	PERMACOLOR® SELECT COLOR KIT	13 LICHEN	100 g pod	-
24-2614-0040-2	PERMACOLOR® SELECT COLOR KIT	14 MOSS	100 g pod	-
24-2616-0040-2	PERMACOLOR® SELECT COLOR KIT	16 SILTSTONE	100 g pod	-
24-2617-0040-2	PERMACOLOR® SELECT COLOR KIT	17 MARBLE BEIGE	100 g pod	-
24-2618-0040-2	PERMACOLOR® SELECT COLOR KIT	18 SAUTERNE	100 g pod	-
24-2622-0040-2	PERMACOLOR® SELECT COLOR KIT	22 MIDNIGHT BLACK	100 g pod	-
24-2623-0040-2	PERMACOLOR® SELECT COLOR KIT	23 ANTIQUE WHITE	100 g pod	-
24-2624-0040-2	PERMACOLOR® SELECT COLOR KIT	24 NATURAL GREY	100 g pod	-
24-2627-0040-2	PERMACOLOR® SELECT COLOR KIT	27 HEMP	100 g pod	-
24-2630-0040-2	PERMACOLOR® SELECT COLOR KIT	30 SAND BEIGE	100 g pod	-
24-2632-0040-2	PERMACOLOR® SELECT COLOR KIT	32 TURQUOISE	100 g pod	-
24-2633-0040-2	PERMACOLOR® SELECT COLOR KIT	33 BOSTON	100 g pod	-
24-2634-0040-2	PERMACOLOR® SELECT COLOR KIT	34 SANDSTONE	100 g pod	-
24-2635-0040-2	PERMACOLOR® SELECT COLOR KIT	35 MOCHA	100 g pod	-
24-2636-0040-2	PERMACOLOR® SELECT COLOR KIT	36 COPPER BEACH	100 g pod	-
24-2637-0040-2	PERMACOLOR® SELECT COLOR KIT	37 CHAMBRAY	100 g pod	-
24-2638-0040-2	PERMACOLOR® SELECT COLOR KIT	38 RIVER ROCK	100 g pod	-
24-2639-0040-2	PERMACOLOR® SELECT COLOR KIT	39 MUSHROOM	100 g pod	-
24-2640-0040-2	PERMACOLOR® SELECT COLOR KIT	40 LATTE	100 g pod	-
24-2641-0040-2	PERMACOLOR® SELECT COLOR KIT	41 KASHMIR	100 g pod	-
24-2642-0040-2	PERMACOLOR® SELECT COLOR KIT	42 PLATINUM	100 g pod	-
24-2643-0040-2	PERMACOLOR® SELECT COLOR KIT	43 CHOCOLATE TRUFFLE	100 g pod	-
24-2644-0040-2	PERMACOLOR® SELECT COLOR KIT	44 BRIGHT WHITE	100 g pod	-
24-2645-0040-2	PERMACOLOR® SELECT COLOR KIT	45 RAVEN	100 g pod	-
24-2646-0040-2	PERMACOLOR® SELECT COLOR KIT	46 QUARRY RED	100 g pod	-
24-2647-0040-2	PERMACOLOR® SELECT COLOR KIT	47 CINNAMON	100 g pod	-
24-2650-0040-2	PERMACOLOR® SELECT COLOR KIT	50 SEA GLASS	100 g pod	-
24-2652-0040-2	PERMACOLOR® SELECT COLOR KIT	52 TOAST ALMOND	100 g pod	-
24-2653-0040-2	PERMACOLOR® SELECT COLOR KIT	53 TWILIGHT BLUE	100 g pod	-
24-2655-0040-2	PERMACOLOR® SELECT COLOR KIT	55 TAWNY	100 g pod	-
24-2656-0040-2	PERMACOLOR® SELECT COLOR KIT	56 DESERT KHAKI	100 g pod	-
24-2657-0040-2	PERMACOLOR® SELECT COLOR KIT	57 HOT COCOA	100 g pod	-
24-2658-0040-2	PERMACOLOR® SELECT COLOR KIT	58 TERRA COTTA	100 g pod	-
24-2659-0040-2	PERMACOLOR® SELECT COLOR KIT	59 ESPRESSO	100 g pod	-
24-2660-0040-2	PERMACOLOR® SELECT COLOR KIT	60 DUSTY GREY	100 g pod	-
24-2661-0040-2	PERMACOLOR® SELECT COLOR KIT	61 PARCHMENT	100 g pod	-
24-2666-0040-2	PERMACOLOR® SELECT COLOR KIT	66 CHESTNUT BROWN	100 g pod	-
24-2667-0040-2	PERMACOLOR® SELECT COLOR KIT	67 AUTUMN GREEN	100 g pod	-
24-2678-0040-2	PERMACOLOR® SELECT COLOR KIT	78 STERLING SILVER	100 g pod	-
24-2681-0040-2	PERMACOLOR® SELECT COLOR KIT	81 BUTTER CREAM	100 g pod	-
24-2685-0040-2	PERMACOLOR® SELECT COLOR KIT	85 ALMOND	100 g pod	-
24-2688-0040-2	PERMACOLOR® SELECT COLOR KIT	88 SILVER SHADOW	100 g pod	-
24-2689-0040-2	PERMACOLOR® SELECT COLOR KIT	89 SMOKE GREY	100 g pod	-
24-2690-0040-2	PERMACOLOR® SELECT COLOR KIT	90 LIGHT PEWTER	100 g pod	-
24-2691-0040-2	PERMACOLOR® SELECT COLOR KIT	91 SLATE GREY	100 g pod	-
24-2692-0040-2	PERMACOLOR® SELECT COLOR KIT	92 SALTILLO	100 g pod	-

APPROXIMATE CONSUMPTION PERMACOLOR® SELECT IN KG PER 10 m ² OF SURFACE						
TILE SIZE AND THICKNESS (mm)	JOINT WIDTH (mm)					
	2	4	6	8	10	12
20x20x4	11.2					
100x100x6	3.4	6.7	10.1	13.4	16.8	20.2
75x150x7	3.9	7.8				
150x150x9	3.4	6.7				
120x240x12		8.4	12.6	16.8	21.0	25.2
200x200x9	2.5	5.0	7.6	10.1	12.6	15.1
200x200x14		7.8	11.8	15.7	19.6	23.5
300x300x10	1.9	3.7	5.6	7.5	9.3	11.2
300x600x10	1.4	2.8	4.2	5.6	7.0	8.4
450x450x10	1.2	2.5	3.7	5.0	6.2	7.5
600x600x10	0.9	1.9	2.8	3.7	4.7	5.6
600x1200x10	0.7	1.4	2.1	2.8	3.5	4.2
150x800x10	2.2	4.4				
200x800x10	1.8	3.5				
150x1500x10	2.1	4.1				
200x1500x10	1.6	3.2				
150x1700x10	2.0	4.1				
200x1700x10	1.6	3.1				
1000x1000x6	0.3	0.7	1.0			
1500x3000x6	0.2	0.3	0.5			

APPROXIMATE CONSUMPTION PERMACOLOR® SELECT FINE IN KG PER 10 m ² OF SURFACE				
TILE SIZE AND THICKNESS (mm)	JOINT WIDTH (mm)			
	2	3	4	6
20x20x4	10.4			
100x100x6	3.1	4.7	6.2	9.4
75x150x7	3.6	5.5		10.9
150x150x9	3.1	4.7	6.2	9.4
120x240x12		5.9	7.8	11.7
200x200x9	2.3	3.5	4.7	7.0
200x200x14	3.6	5.5	7.3	10.9
300x300x10	1.7	2.6	3.5	5.2
300x600x10	1.3	2.0	2.6	3.9
450x450x10	1.2	1.7	2.3	3.5
600x600x10	0.9	1.3	1.7	2.6
600x1200x10	0.7	1.0	1.3	2.0
150x800x10	2.1	3.1	4.1	
200x800x10	1.6	2.4	3.3	
150x1500x10	1.9	2.9	3.8	
200x1500x10	1.5	2.2	2.9	
150x1700x10	1.9	2.8	3.8	
200x1700x10	1.5	2.2	2.9	
1000x1000x6	0.3	0.5	0.6	
1500x3000x6	0.2	0.2	0.3	

COLORBASE FS

Cement-based grout for joints from 1 mm to 6 mm



PRODUCT DESCRIPTION

COLORBASE FS is a cement-based grout with a fine grain size, for making grout joints with glass mosaic, ceramic tiles, stone and marble. For interior and exterior applications, on floors, walls and in swimming pools.

FEATURES & BENEFITS

- Easy to use and excellent workability
- Low VOC emissions (EC1 Plus)
- Low water absorption and high abrasion resistance
- Mold resistant
- Available in 16 colors

TECHNICAL CHARACTERISTICS

- Complies with class CG2 WA as per EN 13888
- Max particle size: ~ 0.15 mm
- Workability time: ~ 30 min
- Walkability: ~ 24 hours
- Compressive strength: ~ 30.0 N/mm²
- Water absorption after 30 min: ~ 0.5 g
- Water absorption after 240 min: ~ 1.0 g

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Residential and commercial

CE MARKING

CE EN13888
CG2 - WA

SHELF LIFE


12 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000003002	COLORBASE FS	03 SILK	5 kg bag x 4/box	27 boxes
L0000000000003004	COLORBASE FS	04 ARCTIC BLUE	5 kg bag x 4/box	27 boxes
L0000000000003009	COLORBASE FS	22 MIDNIGHT BLACK	5 kg bag x 4/box	27 boxes
L0000000000003003	COLORBASE FS	23 ANTIQUE WHITE	5 kg bag x 4/box	27 boxes
L0000000000003007	COLORBASE FS	24 NATURAL GREY	5 kg bag x 4/box	27 boxes
L0000000000003000	COLORBASE FS	44 BRIGHT WHITE	5 kg bag x 4/box	27 boxes
L0000000000003006	COLORBASE FS	45 RAVEN	5 kg bag x 4/box	27 boxes
L0000000000003005	COLORBASE FS	59 ESPRESSO	5 kg bag x 4/box	27 boxes
L0000000000003008	COLORBASE FS	60 DUSTY GREY	5 kg bag x 4/box	27 boxes
L0000000000003010	COLORBASE FS	61 PARCHMENT	5 kg bag x 4/box	27 boxes
L0000000000003011	COLORBASE FS	66 CHESTNUT BROWN	5 kg bag x 4/box	27 boxes
L0000000000003016	COLORBASE FS	78 STERLING SILVER	5 kg bag x 4/box	27 boxes
L0000000000003012	COLORBASE FS	81 BUTTER CREAM	5 kg bag x 4/box	27 boxes
L0000000000003013	COLORBASE FS	85 ALMOND	5 kg bag x 4/box	27 boxes
L0000000000003014	COLORBASE FS	88 SILVER SHADOW	5 kg bag x 4/box	27 boxes
L0000000000003015	COLORBASE FS	89 SMOKE GREY	5 kg bag x 4/box	27 boxes


APPROXIMATE CONSUMPTION **COLORBASE FS** IN KG PER 10 m² OF SURFACE

TILE SIZE AND THICKNESS (mm)	JOINT WIDTH (mm)					

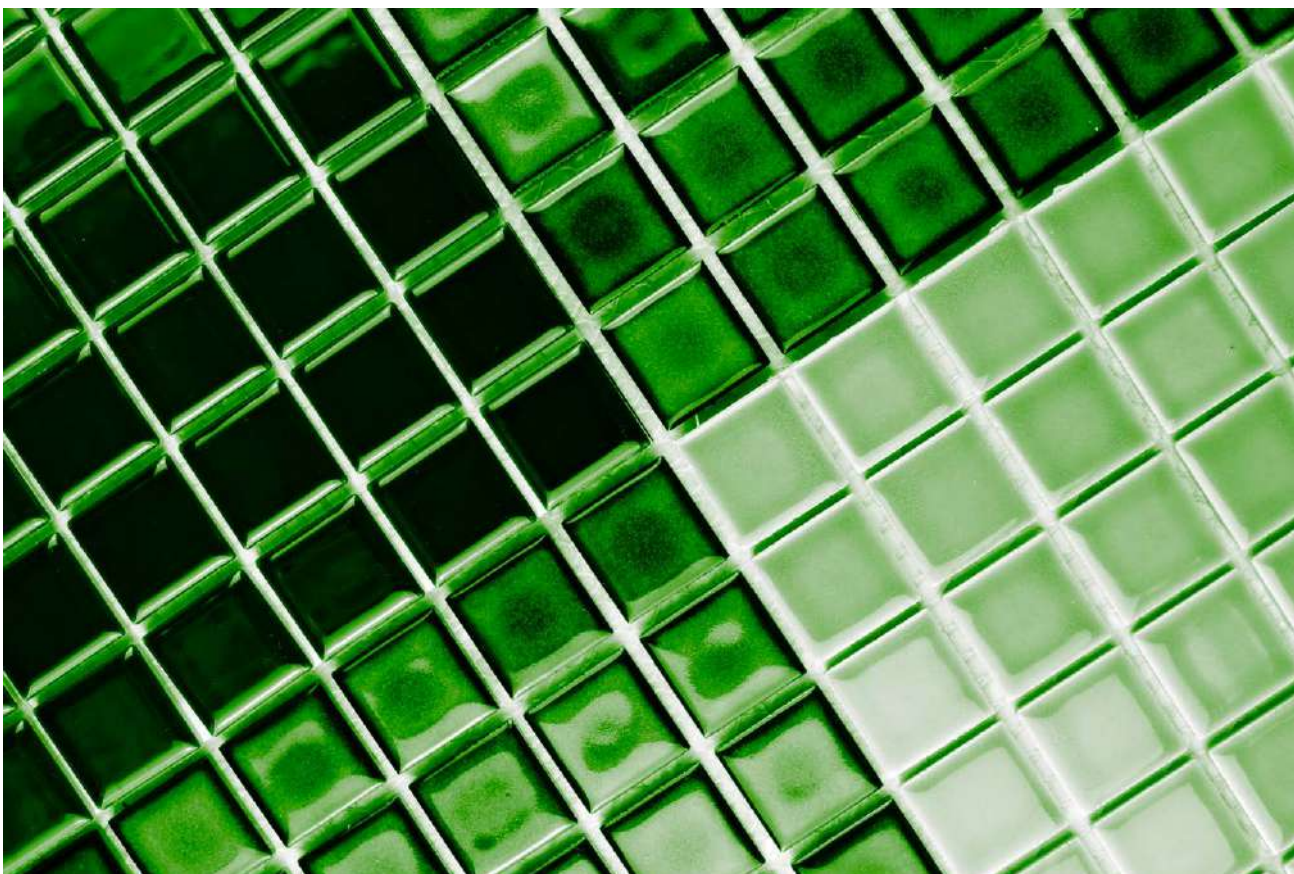

COLORBASE FL

Cement-based grout for joints from 3 mm to 15 mm



PRODUCT DESCRIPTION

COLORBASE FL is a cement-based grout for joints of from 3 to 15 mm for ceramic tiles, thin brick, stone and marble.

For interior and exterior applications, on floors and walls.

FEATURES & BENEFITS

- Easy to use and excellent workability
- Low VOC emissions (EC 1 Plus)
- Low water absorption and high abrasion resistance
- Mold resistant
- Available in 10 colors

TECHNICAL CHARACTERISTICS

- Complies with class CG2 WA as per EN 13888
- Max particle size: ~ 0.3 mm
- Workability time: ~ 30 min
- Walkability: ~ 4 hours
- Compressive strength: ~ 30.0 N/mm²
- Water absorption after 30 min: ~ 0.5 g
- Water absorption after 240 min: ~ 1.0 g

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Residential and commercial

CE MARKING

CE EN13888
CG2 - WA

SHELF LIFE


24 months 5 kg bag (aluminum)
12 months 25 kg bag (paper)



CERTIFICATIONS



TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000003300	COLORBASE FL	03 SILK	5 kg bag x 4/box	27 boxes
L0000000000003301	COLORBASE FL	23 ANTIQUE WHITE	5 kg bag x 4/box	27 boxes
L0000000000003311	COLORBASE FL	24 NATURAL GREY	25 kg/bag	48 bags
L0000000000003302	COLORBASE FL	24 NATURAL GREY	5 kg bag x 4/box	27 boxes
L0000000000003303	COLORBASE FL	44 BRIGHT WHITE	5 kg bag x 4/box	27 boxes
L0000000000003305	COLORBASE FL	45 RAVEN	5 kg bag x 4/box	27 boxes
L0000000000003306	COLORBASE FL	60 DUSTY GREY	5 kg bag x 4/box	27 boxes
L0000000000003313	COLORBASE FL	78 STERLING SILVER	25 kg/bag	48 bags
L0000000000003312	COLORBASE FL	78 STERLING SILVER	5 kg bag x 4/box	27 boxes
L0000000000003308	COLORBASE FL	81 BUTTER CREAM	5 kg bag x 4/box	27 boxes
L0000000000003309	COLORBASE FL	85 ALMOND	5 kg bag x 4/box	27 boxes
L0000000000003310	COLORBASE FL	89 SMOKE GREY	5 kg bag x 4/box	27 boxes


APPROXIMATE CONSUMPTION COLORBASE FL IN KG PER 10 m² OF SURFACE

TILE SIZE AND THICKNESS (mm)	JOINT WIDTH (mm)						
	2	3	4	5	6	8	10



LATAPOXY® 210 GROUT

Hybrid cement-epoxy grout



PRODUCT DESCRIPTION

LATAPOXY® 210 GROUT is a hybrid cement-epoxy grout designed for sealing ceramic tiles and stone on most clean solid surfaces. LATAPOXY® 210 GROUT is a kit composed of: emulsified epoxy resin, hardener and a cement-based premixed compound.

FEATURES & BENEFITS

- Easy to use - washable in water
- Good chemical resistance
- Non-toxic and non-flammable

TECHNICAL CHARACTERISTICS

- Complies with class CG2 WA as per EN 13888
- Max particle size: ~ 0.3 mm
- Workability time: ~ 60 min
- Walkability: ~ 24 hours
- Compressive strength: ~ 18.3 N/mm²
- Water absorption after 30 min: ~ 0.5 g
- Water absorption after 240 min: ~ 1.0 g

INTENDED USE

- Indoor, outdoor
- Floor
- Residential and commercial

CE MARKING



MIXING RATIO


- Part A: 3 kg resins
- Part B: 3 kg resins
- Part C: 25 kg powder

SHELF LIFE


- Part A and B liquids: 24 months
- Part C powder: 12 months



CERTIFICATIONS



TOOLS

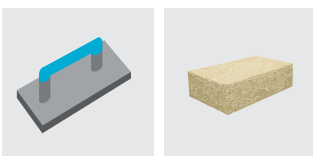

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
L0000000000008000	LATAPOXY® 210 GROUT (Part C)	GREY	25 kg/bag	48 bags
24-S-210AB-NC-04	LATAPOXY® 210 RESINS (Parts A+B)	TRANSPARENT	Kit (1 kg Part A + 1 kg Part B)	-

Color card of grouts and sealants

	SPECTRALOCK® PRO PREMIUM GROUT*	SPECTRALOCK® 2000 IG	PERMACOLOR® SELECT PERMACOLOR® SELECT FINE^	COLORBASE FS	COLORBASE FL	LATASIL™	SPECTRALOCK® PRO PREMIUM GROUT MINI KIT
Translucent	•					•	
03 Silk	•	•	•	•	•	•	•
04 Arctic Blue	•	•	•	•		•	
05 Pastel Blue	•	•	•			•	
06 Limeade	•	•	•			•	
07 Lemonade	•	•	•			•	
08 Cherry Red	•	•	•			•	
13 Lichen	•	•	•			•	
14 Moss	•	•	•			•	
16 Silstone	•	•	•			•	•
17 Marble Beige	•	•	•			•	•
18 Sauterne	•	•	•			•	•
22 Midnight Black	•	•	•			•	
23 Antique White	•	•	•	•	•	•	•
24 Natural Grey	•	•	•	•	•	•	•
27 Hemp	•	•	•			•	•
30 Sand Beige	•	•	•			•	•
32 Turquoise	•	•	•			•	
33 Boston Fern	•	•	•			•	
34 Sandstone	•	•	•			•	•
35 Mocha	•	•	•			•	•
36 Copper Beach	•	•	•			•	
37 Chambrey	•	•	•			•	•
38 River Rock	•	•	•			•	•
39 Mushroom	•	•	•			•	•
40 Latte	•	•	•			•	•
41 Kashmir	•	•	•			•	•
42 Platinum	•	•	•			•	•
43 Chocolate Truffle	•	•	•			•	•
44 Bright White	•		•	•	•	•	•

	SPECTRALOCK® PRO PREMIUM GROUT*	SPECTRALOCK® 2000 IG	PERMACOLOR® SELECT PERMACOLOR® SELECT FINE^	COLORBASE FS	COLORBASE FL	LATASIL™	SPECTRALOCK® PRO PREMIUM GROUT MINI KIT
45 Raven	•	•	•	•	•	•	•
46 Quarry Red	•	•	•			•	•
47 Cinnamon	•	•	•			•	
50 Sea Glass	•	•	•			•	•
52 Toasted Almond	•	•	•			•	•
53 Twilight Blue	•	•	•			•	•
55 Tawny	•	•	•			•	
56 Desert Khaki	•	•	•			•	•
57 Hot Cocoa	•	•	•			•	•
58 Terra Cotta	•	•	•			•	•
59 Espresso	•	•	•	•		•	•
60 Dusty Grey	•	•	•	•	•	•	•
61 Parchment	•	•	•	•		•	•
66 Chestnut Brown	•	•	•	•		•	•
67 Autumn Green	•	•	•			•	•
78 Sterling Silver	•	•	•	•	•	•	•
81 Butter Cream	•	•	•	•	•	•	•
85 Almond	•	•	•	•	•	•	•
88 Silver Shadow	•	•	•			•	•
89 Smoke Grey	•	•	•	•	•	•	•
90 Light Pewter	•	•	•			•	•
91 Slate Grey	•	•	•			•	•
92 Salinillo	•	•	•			•	•

*DAZZLE™ can be mixed with any color of SPECTRALOCK PRO PREMIUM GROUT.


^Available in all the standard colors.



Grout and Sealant Color Guidelines: Grout and sealant color samples are guides only. LATACRETE® does not warrant color matching to this color chart or any color guide produced. Actual shade and texture will depend on job site conditions, lighting, installation techniques, and types/colors of tile or stone used. They may vary from this grout color chart, grout color channel kits, and grout color swatches on product packaging. Verify actual appearance and compatibility with a test area before installing. Blend grouts with different control numbers. No claims for color shade variations will be honored.

SPECTRALOCK® PRO PREMIUM GROUT

High performance anti-stain three-component epoxy grout for joints from 1.5 mm to 12 mm



MICROBAN

PRODUCT DESCRIPTION

SPECTRALOCK® PRO PREMIUM GROUT is a high performance epoxy grout featuring extraordinary color uniformity and durability along with ease of use.

FEATURES & BENEFITS

- Ideal for submerged applications - for swimming pools, fountains and water features
- High stain resistance
- Thixotropic formula for walls and floors
- Strong, long-lasting and resistant to cracking
- Even color - three-component, lets you regulate the consistency
- Maintenance free and does not fade
- Ideal for installations with broad temperature ranges
- Meets the requirements of ANSI A118.3, ISO 13007-3 RG and EN 13888 RG
- Available in 52 colors, plus 5 other DAZZLE™ finishes (Part D)
- Available in 3 formats to meet the needs of your project

TECHNICAL CHARACTERISTICS

- Complies with class RG as per EN 13888
- Max particle size: ~ 0.3 mm
- Workability time: ~ 80 min
- Walkability: ~ 24 hours
- Compressive strength: ~ 50.0 N/mm²
- Water absorption after 240 min: ~ 0.05 g

INTENDED USE

- Indoor, outdoor, swimming pool
- Wall, floor
- Residential and commercial

CE MARKING



CONSUMPTION

Refer to page 84

CONTENTS

- (1) FULL Kit 5.2 kg pail, includes:
- (1) Part A (~ 0.6 kg)
 - (1) Part B (~ 0.6 kg)
 - (1) Part C powder (4.1 kg)
 - (1) Set of gloves
 - (1) Sponge and felt
 - (2) Bags of powder detergent

- (1) MINI Kit 2.4 kg pail, includes:
- (2) Parts A (0.14 kg)
 - (2) Parts B (0.14 kg)
 - (2) Parts C powder (0.91 kg)
 - (4) Bags of powder detergent

- (1) COMMERCIAL Unit box size 21.2 kg, includes:
- (4) Parts A (~ 0.6 kg)
 - (4) Parts B (~ 0.6 kg)
 - (4) Parts C powder (4.1 kg)
 - (8) Bags of powder detergent


SHELF LIFE

Part A and B liquids: 24 months
Part C powder: no limit

CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
KIT 12XX PREMIUM	SPECTRALOCK® PRO PREMIUM GROUT (Full Kit)	See color chart on page 81	5.2 kg/kit	-
24-12XX-52MKIT -SPE-E*	SPECTRALOCK® PRO PREMIUM GROUT (Mini Kit)	See color chart on page 81	2.4 kg/kit	-
24-S-225P4-NS-03	SPECTRALOCK® PRO PREMIUM GROUT COMMERCIAL UNIT (Part A + Part B)	WHITE	4.8 kg	-
24-12XX-0409-2	SPECTRALOCKR PRO PREMIUM GROUT COMMERCIAL UNIT (Part C)	See color chart on page 81	4 x 4.1 kg	-

SPECTRALOCK® PRO PREMIUM TRANSLUCENT GROUT

Translucent and anti-stain three-component epoxy grout



MICROBAN



PRODUCT DESCRIPTION

Translucent version of SPECTRALOCK® PRO PREMIUM GROUT, an epoxy sealant mortar combining a long life and dirt resistance with extreme ease of use.

FEATURES & BENEFITS

- Translucent - lets light through
- Ideal for submerged applications - for swimming pools, fountains and water features
- For many types of tiles
- Strong, long-lasting and resistant to cracking

TECHNICAL CHARACTERISTICS

- Complies with class RG as per EN 13888
- Max particle size: ~ 0.3 mm
- Workability time: ~ 80 min
- Walkability: ~ 24 hours
- Compressive strength: ~ 55.0 N/mm²
- Water absorption after 240 min: ~ 0.05 g

INTENDED USE

- Indoor, outdoor, swimming pool
- Wall, floor
- Residential and commercial

CE MARKING

CE EN13888
RG

CONSUMPTION


Refer to page 84

CONTENTS

- (1) Kit 5.08 kg pail includes:
- (1) Part A (0.32 kg)
 - (1) Part B (0.66 kg)
 - (1) Part G glass beads (4.1 kg)
 - (1) Set of gloves
 - (1) Sponge
 - (2) Bags of powder detergent

SHELF LIFE


Part A and B liquids: 24 months
Part G glass beads: no limit

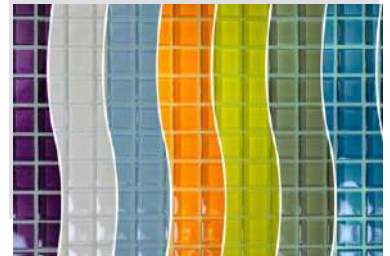

CERTIFICATIONS



TOOLS




ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE
24-S-218P1-NS-02	SPECTRALOCK® PRO PREMIUM TRANSLUCENT GROUT	TRANSLUCENT	5.08 kg/kit

APPROXIMATE CONSUMPTION **SPECTRALOCK® PRO PREMIUM GROUT** IN KG PER 10 m² OF SURFACE

TILE SIZE AND THICKNESS (mm)	JOINT WIDTH (mm)					
	2	3	4	5	6	7


APPROXIMATE CONSUMPTION **SPECTRALOCK® 2000 IG** IN KG PER 10 m² OF SURFACE

TILE SIZE AND THICKNESS (mm)	JOINT WIDTH (mm)					
	2	3	4	5	6	7

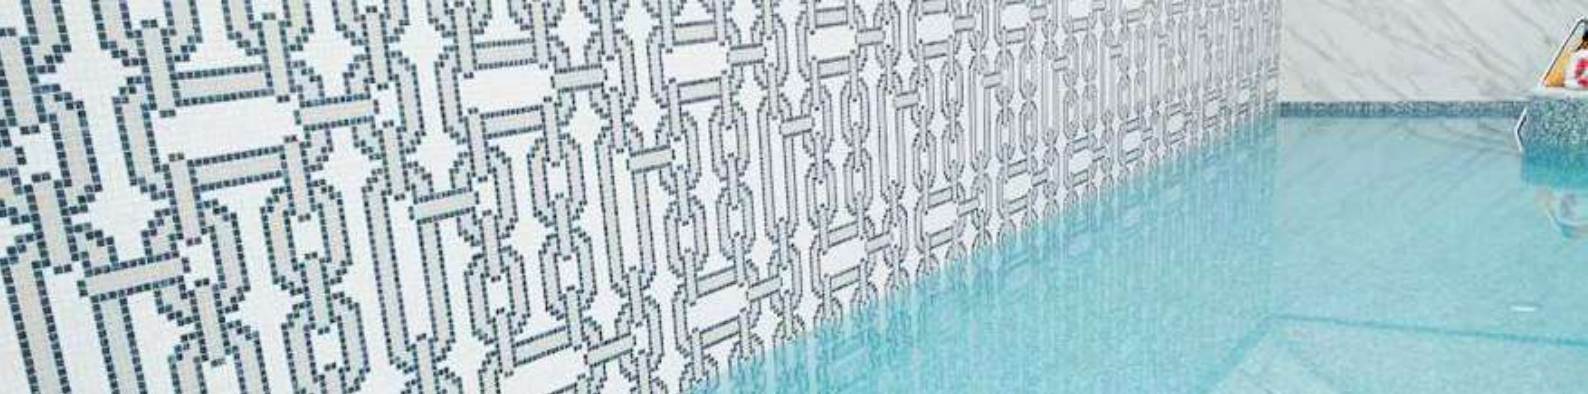

SPECTRALOCK® DAZZLE™

Fluorescent metallic grout finish



PRODUCT DESCRIPTION

SPECTRALOCK® DAZZLE adds metallic or fluorescent effects to the epoxy sealant SPECTRALOCK® PRO PREMIUM GROUT.

FEATURES & BENEFITS





- For swimming pool applications
- Available in 4 metallic colors and one with a fluorescent effect

INTENDED USE

- Indoor, outdoor, swimming pool
- Wall, floor
- Residential and commercial

CONTENTS


Part D: 195 g

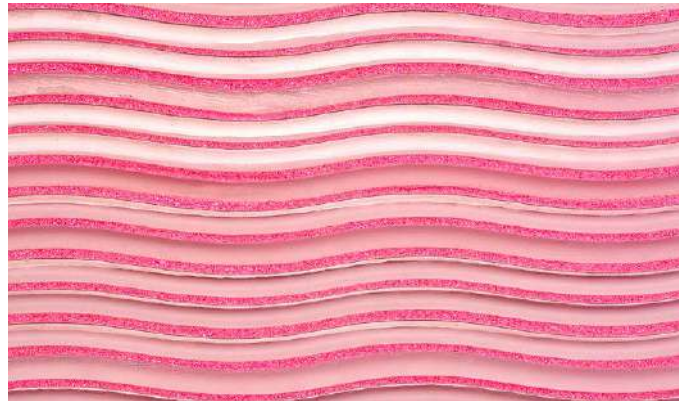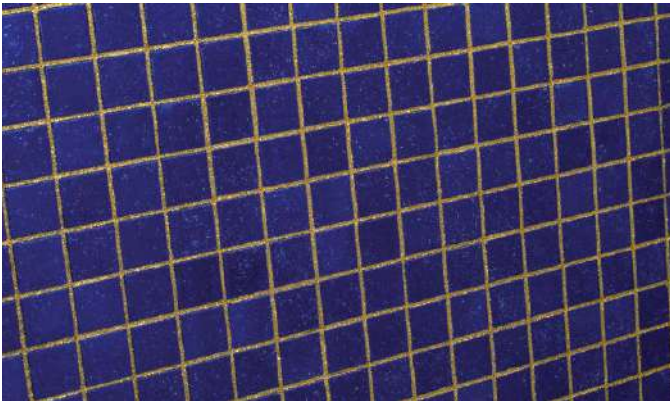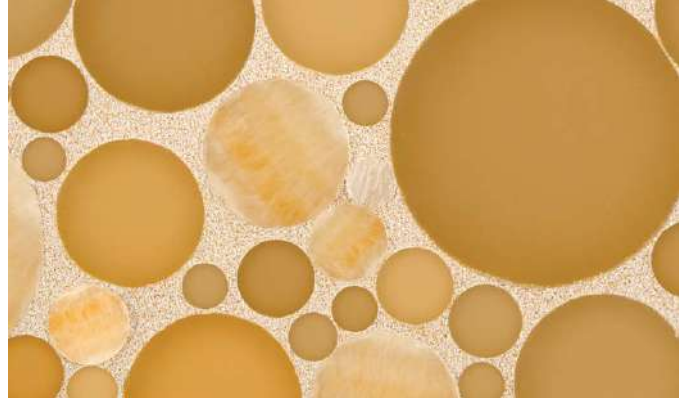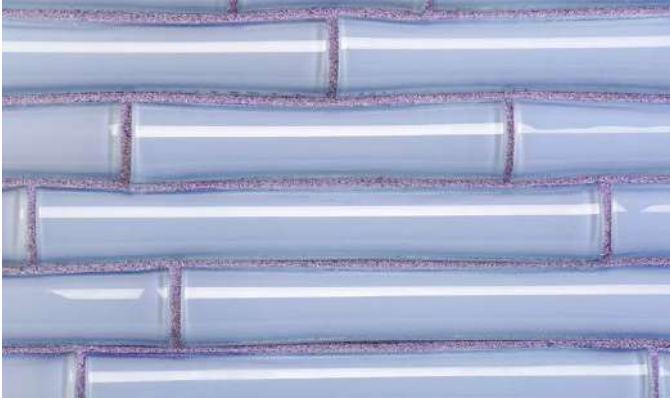

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-1295-0102-2	SPECTRALOCK® DAZZLE™	GOLD	jar	-
24-1296-0102-2	SPECTRALOCK® DAZZLE™	SILVER	jar	-
24-1297-0102-2	SPECTRALOCK® DAZZLE™	COPPER	jar	-
24-1298-0102-2	SPECTRALOCK® DAZZLE™	MOTHER OF PEARL	jar	-
24-1299-0102-2	SPECTRALOCK® DAZZLE™	GLOW IN THE DARK	jar	-

SPECTRALOCK® 2000 IG

Three-component epoxy sealant particularly suited for industrial settings highly resistant to chemical agents



MICROBAN

PRODUCT DESCRIPTION

SPECTRALOCK® 2000 IG is an epoxy sealant highly resistant to chemical agents, recommended for sealing joints of ceramic tiles of every type.

SPECTRALOCK® 2000 IG combines high mechanical strength, durability and extraordinary chemical resistance to the most common corrosive substances, detergents, foods and beverages.

CE MARKING

CE EN13888
RG

SHELF LIFE

Part A and B liquids: 24 months
Part C powder: no limit

CONTENTS

- (1) Kit 11.2 kg pail includes:
- (2) Parts A (0.52 kg)
 - (2) Parts B (0.98 kg)
 - (2) Parts C powder (4.1 kg)
 - (2) Bags of powder detergent
 - (2) Sponges
 - (1) Set of gloves



FEATURES & BENEFITS

- High chemical resistance
- Excellent temperature resistance - ideal for cold storage rooms
- Equipped with antimicrobial technology
- Highly resistant to bacteria
- Washable with water
- Low VOC emissions (EC1 Plus) - better indoor air quality
- Rapid polymerization, also at low temperatures
- Exceeds ANSI 118.3 (Epoxy) and ANSI 118.5 (Furan)
- Available in 51 colors (not available in 44 BRIGHT WHITE)


INTENDED USE

- Indoor, outdoor, swimming pool
- Wall, floor
- Residential, industrial (dairies, meat processing plants, pharmaceutical industries, distilleries, laboratories, computer rooms, breweries, hospitals, veterinary clinics, kennels), commercial (industrial kitchens, restaurants and pizzerias, fish stores, restrooms, fast food restaurants, butchers, supermarkets, laboratories)

CERTIFICATIONS



TOOLS

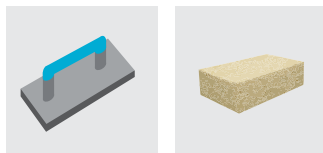


ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
2000-SL0001-XX*	SPECTRALOCK® 2000 IG	See color chart on page 81	11.2 kg/kit	48 kits

*XX to indicate the color code



LATASIL™

High performance single-component elastomeric universal silicone sealant with fungicide



PRODUCT DESCRIPTION

LATASIL™ is a silicone sealant with neutral reticulation, designed to be used with ceramic tiles and stone.

FEATURES & BENEFITS

- Universal sealant - ideal for natural stone, sanitary areas, swimming pools, * façades, cold storage rooms and more besides
- Superior adhesion, especially on stone, metals and glass
- Antimicrobial and fungicidal - inhibits the onset of mold and growth of bacteria
- Low VOC emissions - safe for the environment and for health,
- Excellent weatherability, resistance to aging, UV radiation and chemical agents
- Available in all the 53 LATICRETE** colors offered in Europe

TECHNICAL CHARACTERISTICS

- Complies with EN 15651 parts 1,2,3 and 4
- Skin forming time: ~ 15 min
- Setting speed: ~ 2 mm/24 hours
- Elastic modulus: ~ 0.35 MPa
- Shore A hardness: ~ 28
- Temperature resistance: -60°C to +180°C
- Capability for movement: ~ 25%

INTENDED USE

- Indoor, outdoor, swimming pool
- Wall, floor
- Can be used for building and facade elements such as door frames, windows, facade panels, panels, slabs, edges, profiles and elements made of pre-cast concrete, stone, masonry, metal, glass, wood, coated and anodized aluminum, stainless steel, PVC and composite material.
- Antibacterial sealant for ventilation and air-conditioning systems, cold rooms and cleanrooms, laboratories, hospital rooms, hygiene, pharmaceutical, food and other critical hygiene rooms

CE MARKING



15651-1
F-EXT-INT-CC 25LM

15651-2
G-CC 25LM

15651-3
S-XS1

15651-4
PW-EXT-INT-CC 25LM

SHELF LIFE


12 months

COLORS

Available in 53 colors



CERTIFICATIONS



TOOLS



* LATASIL PRIMER is recommended in all LATASIL applications, but is essential in immersion.


** See next page

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
LATASI0000000	LATASIL™	00 TRANSLUCENT**	310 ml cartridge x 12/box	-
LATASI0000003	LATASIL™	03 SILK	310 ml cartridge x 12/box	-
LATASI0000004	LATASIL™	04 BLUE ARCTIC**	310 ml cartridge x 12/box	-
LATASI0000005	LATASIL™	05 PASTEL BLUE**	310 ml cartridge x 12/box	-
LATASI0000006	LATASIL™	06 LIMEADE**	310 ml cartridge x 12/box	-
LATASI0000007	LATASIL™	07 LEMONADE**	310 ml cartridge x 12/box	-
LATASI0000008	LATASIL™	08 CHERRY RED**	310 ml cartridge x 12/box	-
LATASI0000013	LATASIL™	13 LICHEN**	310 ml cartridge x 12/box	-
LATASI0000014	LATASIL™	14 MOSS**	310 ml cartridge x 12/box	-
LATASI0000016	LATASIL™	16 SILTSTONE**	310 ml cartridge x 12/box	-
LATASI0000017	LATASIL™	17 MARBLE BEIGE	310 ml cartridge x 12/box	-
LATASI0000018	LATASIL™	18 SAUTERNE	310 ml cartridge x 12/box	-
LATASI0000022	LATASIL™	22 MIDNIGHT BLACK	310 ml cartridge x 12/box	-
LATASI0000023	LATASIL™	23 ANTIQUE WHITE	310 ml cartridge x 12/box	-
LATASI0000024	LATASIL™	24 NATURAL GREY	310 ml cartridge x 12/box	-
LATASI0000027	LATASIL™	27 HEMP**	310 ml cartridge x 12/box	-
LATASI0000030	LATASIL™	30 SAND BEIGE	310 ml cartridge x 12/box	-
LATASI0000032	LATASIL™	32 TURQUOISE**	310 ml cartridge x 12/box	-
LATASI0000033	LATASIL™	33 BOSTON**	310 ml cartridge x 12/box	-
LATASI0000034	LATASIL™	34 SANDSTONE**	310 ml cartridge x 12/box	-
LATASI0000035	LATASIL™	35 MOCHA	310 ml cartridge x 12/box	-
LATASI0000036	LATASIL™	36 COPPER BEACH**	310 ml cartridge x 12/box	-
LATASI0000037	LATASIL™	37 CHAMBRAY**	310 ml cartridge x 12/box	-
LATASI0000038	LATASIL™	38 RIVER ROCK**	310 ml cartridge x 12/box	-
LATASI0000039	LATASIL™	39 MUSHROOM**	310 ml cartridge x 12/box	-
LATASI0000040	LATASIL™	40 LATTE**	310 ml cartridge x 12/box	-
LATASI0000041	LATASIL™	41 KASHMIR**	310 ml cartridge x 12/box	-
LATASI0000042	LATASIL™	42 PLATINUM	310 ml cartridge x 12/box	-
LATASI0000043	LATASIL™	43 CHOCOLATE TRUFFLE**	310 ml cartridge x 12/box	-
LATASI0000044	LATASIL™	44 BRIGHT WHITE	310 ml cartridge x 12/box	-
LATASI0000045	LATASIL™	45 RAVEN	310 ml cartridge x 12/box	-
LATASI0000046	LATASIL™	46 QUARRY RED**	310 ml cartridge x 12/box	-
LATASI0000047	LATASIL™	47 CINNAMON**	310 ml cartridge x 12/box	-
LATASI0000050	LATASIL™	50 SEA GLASS**	310 ml cartridge x 12/box	-
LATASI0000052	LATASIL™	52 TOAST ALMOND**	310 ml cartridge x 12/box	-
LATASI0000053	LATASIL™	53 TWILIGHT BLUE**	310 ml cartridge x 12/box	-
LATASI0000055	LATASIL™	55 TAWNY**	310 ml cartridge x 12/box	-
LATASI0000056	LATASIL™	56 DESERT KHAKI**	310 ml cartridge x 12/box	-
LATASI0000057	LATASIL™	57 HOT COCOA**	310 ml cartridge x 12/box	-
LATASI0000058	LATASIL™	58 TERRA COTTA**	310 ml cartridge x 12/box	-
LATASI0000059	LATASIL™	59 ESPRESSO**	310 ml cartridge x 12/box	-
LATASI0000060	LATASIL™	60 DUSTY GREY	310 ml cartridge x 12/box	-
LATASI0000061	LATASIL™	61 PARCHMENT	310 ml cartridge x 12/box	-
LATASI0000066	LATASIL™	66 CHESTNUT BROWN	310 ml cartridge x 12/box	-
LATASI0000067	LATASIL™	67 AUTUMN GREEN**	310 ml cartridge x 12/box	-
LATASI0000078	LATASIL™	78 STERLING SILVER	310 ml cartridge x 12/box	-
LATASI0000081	LATASIL™	81 BUTTER CREAM	310 ml cartridge x 12/box	-
LATASI0000085	LATASIL™	85 ALMOND	310 ml cartridge x 12/box	-
LATASI0000088	LATASIL™	88 SILVER SHADOW	310 ml cartridge x 12/box	-
LATASI0000089	LATASIL™	89 SMOKE GREY	310 ml cartridge x 12/box	-
LATASI0000090	LATASIL™	90 LIGHT PEWTER	310 ml cartridge x 12/box	-
LATASI0000091	LATASIL™	91 SLATE GREY**	310 ml cartridge x 12/box	-
LATASI0000092	LATASIL™	92 SALTILLO**	310 ml cartridge x 12/box	-

** Colors available only to order, not in stock. Contact us for minimum sales quantities, price and procurement lead times.

LATASIL™ PRIMER

Waterproof single-component primer, resistant to moisture and continuous immersion in water



PRODUCT DESCRIPTION

Applied on surfaces, it protects them and makes them perfectly compatible with LATASIL™ sealant increasing adhesion and durability in every intended use.

FEATURES & BENEFITS

- UN-approved packing, equipped with safety seal
- Single-component and ready-to-use - easy to apply with a brush or roller
- Fast drying - LATASIL™ can be applied within ~ 60 minutes (at ambient temperature)
- It forms a highly resistant and non-porous membrane, protects against moisture and contact with water - ideal for all applications constantly immersed in water, such as: swimming pools, fountains and baths
- It stops surface absorption and ensures an excellent adhesion bridge for LATASIL™ - good for laying stone
- The bond's duration over time is not affected by water

INTENDED USE

- Indoor, outdoor, swimming pool
- Wall, floor
- Porous and non-absorbent surfaces




SHELF LIFE

12 months

DRYING

Apply LATASIL™ sealant within ~ 60 minutes (at room temperature)

TOOLS

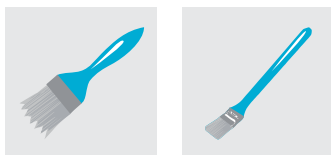

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-9118-0601-2-NO	LATASIL™ PRIMER	TRANSPARENT	250 ml	-

POLYPROFIL

Closed cell polyethylene foam profile



PRODUCT DESCRIPTION

POLYPROFIL is a round profile of closed cell polyethylene foam intended to be used before elastomeric sealants (such as LATASIL™) to form the third wall in joints or cracks to be closed with sealants or fillers.

FEATURES & BENEFITS

- Preformed and ready for use
- Compressible, it easily adapts to the joint
- Easy to cut

PROFILE

Profile diameter 10 mm

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
PF10	POLYPROFIL	GREY	roll 1500 m	-



TILE, STONE & SURFACE CARE



The PROTECTORS are a select range of sealants with a natural appearance in specific water- or solvent-based solutions for every kind of porous stone and surface.

The CLEANERS are a range of specialized solutions for daily and heavy-duty cleaning, designed to clean and remove stains without damaging the surface of tiles or stone.

The ENHANCERS offer an all-in-one sealant that protects, tones and intensifies the precious natural color of porous surfaces.



PROTECTION AGAINST ALL STAINS

FOR POROUS SURFACES




PROTECTORS, CLEANERS
AND ENHANCERS

A LINE OF INNOVATIVE AND
EASY-TO-APPLY PRODUCTS

Specially formulated for tiles, natural stone,
mortar and cement-based grout

STONETECH® BULLETPROOF® SEALER

A high-quality protector designed to provide the greatest water-oil repellent anti-stain protection



PRODUCT DESCRIPTION

This professional grade protector is an excellent water repellent on every kind of natural stone, stoneware, clinker and grouts for joints, with medium-high absorption indoor and outdoor applications and it does not alter the original color of the material.

A better performing and safer alternative to solvent-based protectors, STONETECH® BULLETPROOF® SEALER is the best for you and the environment.

Available in large volumes to order. Contact us for minimum order quantities and delivery times.

FEATURES & BENEFITS

- Provides the greatest protection against stains
- Excellent for use in high-traffic or frequently used areas such as false ceilings, back splashes, entryways, floors and walls
- Alters neither the transpirability nor the original color of the material
- The water-based formula is better for you and the environment

TECHNICAL CHARACTERISTICS

- pH: ~ 6.5

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Absorbent natural stone, ceramic tiles, masonry and cement-based grouts



CONSUMPTION

~ 0.1 l/m²

BASE

Water

VOC CONTENT

1 g/l

SHELF LIFE


24 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-D15130588-1	STONETECH® BULLETPROOF® SEALER	COLORLESS	1 l x 12/box	40 boxes
24-D15130595-5	STONETECH® BULLETPROOF® SEALER	COLORLESS	5 l x 4/box	32 boxes

STONETECH® HEAVY DUTY EXTERIOR SEALER

A penetrating protector offering advanced protection against stains and weather resistance on absorbent surfaces



SOLVENT BASED
À BASE DE SOLVANT



PRODUCT DESCRIPTION

STONETECH® HEAVY DUTY EXTERIOR SEALER is a penetrating solvent-based protector that offers high protection for natural stone, masonry and mortar. Designed specifically to face the challenges of outdoor applications, STONETECH® HEAVY DUTY EXTERIOR SEALER minimizes efflorescence and repels water.

FEATURES & BENEFITS

- Advanced protection against stains
- Protects natural stone, masonry and mortar
- Minimizes efflorescence and is water repellent
- Resistant to weather
- Solvent-based formula
- For outdoor use

TECHNICAL CHARACTERISTICS

- pH: ~ 9 - 11
- Curing time: ~ 48 hours
- Putting into service: ~ 5 hours

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Sidewalks, yards and walkways
- Kitchen and bathroom tops, worktops, showers
- Granite, travertine, slate, sandstone, split stone
- Concrete, concrete self-locking blocks

CONSUMPTION

~ 20 g/m²

BASE


Solvent

VOC CONTENT


724 g/l

SHELF LIFE

24 months

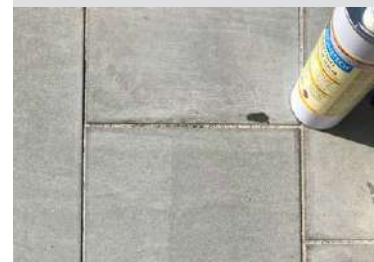

TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-D15064868-1	STONETECH® HEAVY DUTY EXTERIOR SEALER	COLORLESS	1 l x 12/box	40 boxes
24-D15064858-5	STONETECH® HEAVY DUTY EXTERIOR SEALER	COLORLESS	5 l x 4/box	32 boxes

STONETECH® CONCRETE SEALER

Sealant and hardener for concrete that creates a strong protective surface



PRODUCT DESCRIPTION

STONETECH® CONCRETE SEALER penetrates concrete to seal, densify and harden the surface and reduce the absorption of water.

STONETECH® CONCRETE SEALER forms no surface films nor alters natural appearance.

FEATURES & BENEFITS

- Powerful water-based sealant for concrete
- Seals and protects the surface
- No VOC emissions - safe for the environment and for health, odorless
- Ideal for concrete worktops, cement floors and walls

TECHNICAL CHARACTERISTICS

- pH: ~ 13
- Abrasion resistance (ASTM C779): ~ +225%
- Wet or dry static friction coefficient: > 0.6
- Moisture absorption reduction in 24 hours (ASTM C624): ~ 81%

INTENDED USE

- Indoor, outdoor
- Wall, floor
- Medium to heavy traffic areas, warehouses, distribution centers, food processing plants, stores, restaurants, sports arenas and stadiums, concrete worktops
- Concrete



CONSUMPTION

~ 0.32 l/m²

BASE

Water

VOC CONTENT

0 g/l

SHELF LIFE


24 months



CERTIFICATIONS




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-8-04-153-1183	STONETECH® CONCRETE SEALER	COLORLESS	1 l x 12/box	40 boxes
8-04-153-1183-0	STONETECH® CONCRETE SEALER	COLORLESS	5 l x 4/box	32 boxes

STONETECH® REVITALIZER® CLEANER & PROTECTOR

Two products in one: recommended for daily cleaning and at the same time for protection and reinforcement

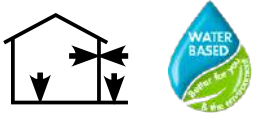

PRODUCT DESCRIPTION

STONETECH® REVITALIZER® CLEANER & PROTECTOR keeps natural stone and grout looking as bright as new.

This water-based and low VOC is ideal for false ceilings, back splashes, walls, floors and more besides.

FEATURES & BENEFITS

- Two products in one - recommended for daily cleaning and at the same time for protection
- Protects against stains
- Delicate water-based formula
- Simplifies cleaning surfaces
- Has a pleasant citrus aroma

TECHNICAL CHARACTERISTICS

- pH: ~ 6-7

INTENDED USE

- Indoors
- Wall, floor
- Natural stone, marble, granite, quartzite, travertine, sandstone, split stone
- Cement-based grout



BASE

Water

VOC CONTENT

27 g/l

DILUTION

Ready-to-use

SHELF LIFE


24 months



CERTIFICATIONS




TOOLS

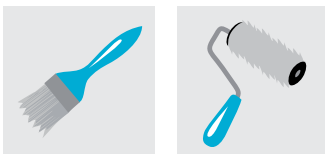

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-D14608351-1	STONETECH® REVITALIZER® CLEANER & PROTECTOR	COLORLESS	1 l x 12/box	40 boxes
24-D14608351-5	STONETECH® REVITALIZER® CLEANER & PROTECTOR	COLORLESS	5 l x 4/box	32 boxes

STONETECH® STONE & TILE CLEANER

A detergent with a neutral pH formula designed to clean everyday stains, dirt and grease



PRODUCT DESCRIPTION

Unlike other household detergents that are highly acidic and aggressive, STONETECH® STONE & TILE CLEANER is water based and has a neutral pH, but ensures thorough, non-aggressive cleaning.

FEATURES & BENEFITS

- Daily detergent - cleans everyday dirt and stains
- Excellent for daily use on false ceilings, back splashes, walls, floors and more besides
- Neutral pH formula - cleans and degreases surfaces without damaging natural stone, tiles and mortar
- Better indoor air quality
- Can be diluted for normal and frequent cleaning or used neat for extraordinary cleaning

TECHNICAL CHARACTERISTICS

- pH: ~ 8

INTENDED USE

- Indoor, outdoor
- Walls, floors
- Natural stone, porcelain stoneware and ceramic tiles including grouting



BASE

Water

VOC CONTENT

25 g/l

DILUTION

Normal cleaning:
1 l water: 50 ml


Intense cleaning:
1 l water: 200-500 ml



CERTIFICATIONS




TOOLS

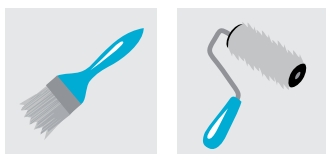

ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-D15182925-1	STONETECH® STONE & TILE CLEANER	COLORLESS	1 l x 12/box	40 boxes
24-D15182925-5	STONETECH® STONE & TILE CLEANER	COLORLESS	5 l x 4/box	32 boxes

STONETECH® KLENZALL™ CLEANER

High strength alkaline cleaner to remove organic dirt and oily residues



PRODUCT DESCRIPTION

STONETECH® KLENZALL CLEANER is a concentrated alkaline degreaser and cleaner made to remove organic dirt and greasy and oily residues from natural stone, tiles, masonry and grout.

It cleans, degreases and prepares surfaces for new treatments. It has low VOC emissions.

FEATURES & BENEFITS

- For natural stone, tiles, masonry and grout
- To remove organic dirt and greasy and oily residues
- Cleans, degreases and prepares the surface for the new treatment
- Does not damage stone
- Alkaline water-based formula
- Can be used neat for extraordinary cleaning or diluted for frequent cleaning

TECHNICAL CHARACTERISTICS

- pH: 12
- Form: liquid
- Color: from colorless to amber

INTENDED USE

- Bathroom and Kitchen Tops, Walls, Floors
- Natural stone, Granite, Marble, Clinker, Ceramic tiles, Porcelain stoneware, Cement-based grout, Brick masonry

BASE

Water

CONTENUTO VOC

31 g/l

DILUIZIONE

Normal cleaning:
10 l water: 100-300 ml


Intense cleaning:
4-10 l water: 1 l



CERTIFICATIONS



TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-D 12446928-1	STONETECH® KLENZALL™ CLEANER	COLORLESS	1 l x 12/box	40 boxes
24-D 12446928-5	STONETECH® KLENZALL™ CLEANER	COLORLESS	5 l x 4/box	32 boxes

STONETECH® CLEANER ACID

Acid-based detergent for removing remains of cement-based grout



PRODUCT DESCRIPTION

STONETECH® CLEANER ACID is a fast acid-based detergent for removing remains of cement-based grout on ceramic surfaces. Ideal for efflorescence and limescale.

FEATURES & BENEFITS

- Can be used on acid-resistant tiles and stone, masonry and grout
- Ideal for removing efflorescence and limescale
- Can be used neat for extraordinary cleaning or diluted for frequent cleaning (at most: 1 part of detergent with 2 parts of water)

TECHNICAL CHARACTERISTICS

- pH: ~ 1

INTENDED USE

- Indoor, outdoor
- Walls, floors
- Porcelain stoneware, ceramic tiles, clinker

BASE

Water (with water-soluble solvents)

VOC CONTENT

365 g/l

DILUTION

Ready-to-use

SHELF LIFE

24 months




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-D14304000-1	STONETECH® CLEANER ACID	COLORLESS	1 l x 12/box	40 boxes

STONETECH® MOLD & MILDEW STAIN REMOVER

A powerful ready-to-use special detergent specifically formulated to remove molds and fungi

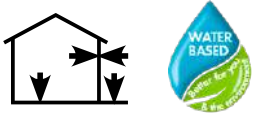

PRODUCT DESCRIPTION

STONETECH® MOLD & MILDEW STAIN REMOVER is a powerful special detergent formulated to remove molds, fungi and even algae from natural stone, tiles, masonry and mortar. It rapidly dissolves the unpleasant stains of molds and fungi without deteriorating or damaging the surface.

FEATURES & BENEFITS

- Eliminates unpleasant stains of molds and fungi
- For natural stone, tiles, masonry and mortar
- Does not deteriorate stone or mortar
- Formulated for an even distribution and adhesion on vertical surfaces without dripping
- No VOC emissions - better indoor air quality

TECHNICAL CHARACTERISTICS

- pH: ~14

INTENDED USE

- Indoor, outdoor
- Walls, floors
- Porcelain stoneware, ceramic tiles, clinker, cement- and epoxy-based grout, natural stone

BASE

Water

VOC CONTENT

0 g/l

DILUTION

Ready-to-use

SHELF LIFE

24 months




CERTIFICATIONS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-D14822802-1	STONETECH® MOLD & MILDEW STAIN REMOVER	COLORLESS	750 ml x 12/box	

STONETECH® EPOXY GROUT HAZE & COATING STRIPPER

Fast-acting gel that dissolves epoxy mortar and epoxy cladding



PRODUCT DESCRIPTION

STONETECH® EPOXY GROUT HAZE & COATING STRIPPER is a fast-acting gel that in just a few minutes dissolves stubborn epoxy remains on vertical and horizontal surfaces.

It works both immediately after installation and several days later.

FEATURES & BENEFITS

- Eliminates epoxy mortar in 15 minutes or less
- Safely removes epoxy mortar and epoxy cladding
- Fast-acting, non-drip gel, ideal for vertical and horizontal applications
- Water-based formula
- Slight smell, no vapors
- No methylene chloride

TECHNICAL CHARACTERISTICS

- pH: ~ 2.5 (+/- 0.5)

INTENDED USE

- Indoor, outdoor
- Walls, floors
- Porcelain stoneware, ceramic tiles, clinker, natural stone

BASE

Water

VOC CONTENT

380 g/l

DILUTION

Ready-to-use

SHELF LIFE

24 months




TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-D15006321-1	STONETECH® EPOXY GROUT HAZE & COATING STRIPPER	COLORLESS	1 l x 12/box	40 boxes

STONETECH® RESTORE™ ACIDIC CLEANER

Controlled action acid detergent, cleaner and descaler for removing efflorescence, remains of cement, limescale, whitewash and rust



PRODUCT DESCRIPTION

STONETECH® RESTORE™ ACIDIC CLEANER is a strong detergent with a controlled action for tiles, acid-resistant stones, masonry and grouts.

Quickly renews the surface making it look like new. This detergent, which gives off no harmful vapors while acting, also cleans off hardened soap foam and light remains of grout.

FEATURES & BENEFITS

- Strong detergent with a controlled action for tiles, acid-resistant stones, masonry and grouts
- Removes efflorescence, remains of cement, limescale, whitewash and surface rust
- Renews and brightens surface appearance
- Water-based acid formula
- Gives off no harmful vapors while acting - better indoor air quality

TECHNICAL CHARACTERISTICS

- pH: ~ 0.5 (+/- 0.5)

INTENDED USE

- Indoor, outdoor
- Walls, floors
- Porcelain stoneware, ceramic tiles, clinker, cement- and epoxy-based grout, natural stone acid resistant

CERTIFICATIONS



TOOLS



BASE

Water

VOC CONTENT

0 g/l

DILUTION

Normal cleaning:
1 l water: 50 ml

Intense cleaning:
1 l water: 200-500 ml

SHELF LIFE


24 months



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-D14446083-1	STONETECH® RESTORE™ ACIDIC CLEANER	COLORLESS	1 l x 12/box	40 boxes
24-D14446083-5	STONETECH® RESTORE™ ACIDIC CLEANER	COLORLESS	5 l x 4/box	32 boxes

STONETECH® ENHANCER PRO™ SEALER

Enhancer and sealant that intensifies surface color, offering the greatest protection of the surface from stains



SOLVENT BASED
À BASE DE SOLVANT



PRODUCT DESCRIPTION

STONETECH® ENHANCER PRO™ SEALER tones and intensifies the rich natural color of porous surfaces without altering the finish and penetrates deeply to protect it against stains.

FEATURES & BENEFITS

- Intensifies and tones the color of natural stone with medium-high absorption, terracotta and cement-based grout
- Greatest protection from stains with a "wet effect" - no shine
- Resistant to weather and UV radiation
- Easy to apply, solvent-based formula

INTENDED USE

- For indoor and outdoor use, Bathroom and Kitchen Tops, Countertops, Walls.
- Hewn stone, Travertine, Limestones, Granite, Prefinished marble tiles, Prefinished stone tiles. Sandstone, Grout for joints

BASE

Solvent

VOC CONTENT

< 675 g/l

PH

4.5



Before
Dull appearance



After
Deeper tones

TOOLS



ITEM CODE NUMBER	PRODUCT NAME	COLOR	PACKAGE	PALLET/PCS
24-D12446631-1	STONETECH® ENHANCER PRO™ SEALER	COLORLESS	1 l x 12/box	40 boxes
24-D12446631-5	STONETECH® ENHANCER PRO™ SEALER	COLORLESS	5 l x 4/box	32 boxes

ECO-FRIENDLY COMMITMENT

At LATICRETE®, we are committed to providing innovative, sustainable and safe products to ensure a better quality of life for future generations. To support our efforts in safety and transparency, we offer GREENGUARD certifications, GEV EMICODE certifications, test reports, material safety data sheets (MSDS), etc., all available on the product pages of our Website.



“GREEN” CERTIFICATIONS

As the leading manufacturer of tile and stone installation systems, LATICRETE® offers products that have been tested and certified independently to the highest “green” standards with low VOC emissions in both commercial and residential building.


GUARANTEED SYSTEMS

LATICRETE® offers the most complete guarantee on its products: LATICRETE tile and natural stone installation systems are covered by the LATICRETE TEN-YEAR warranty. With over 65 years of successful installations, you can rely on LATICRETE for your tile and stone installation needs.

COMPLETE SYSTEMS

A wide range of products with low VOC emissions (adhesives, substrates, waterproofing agents, grouts, smoothing compounds, self-leveling compounds, epoxy-based adhesives and mortars). LATICRETE® products contribute to eco-sustainability.

OUR PRODUCTS HELP OBTAIN LEED CREDITS.

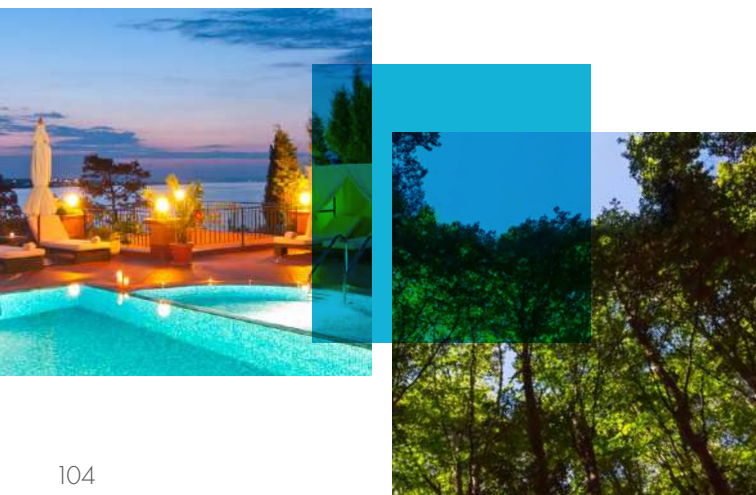

TECHNICAL SUPPORT

For over 65 years, LATICRETE® is the point of reference in the high performance construction materials industry for architects and construction professionals worldwide. We have been pioneers and always on the cutting edge. Our wide range of products offers superior quality and value.

We are entirely dedicated to innovation, growth and a construction site approach with complete installation systems.

LATICRETE CAMP

TECHNICAL SUPPORT, TRAINING AND INSTRUCTION

Let our experience, solutions and technical support assist you in your next project, no matter what the application.

LATICRETE® offers technical training programs that have been specifically developed for installers, distributors and all the players involved in our industry. Contact us today to schedule a training course, where you can:

- Broaden your knowledge on how to select and advise on the most suitable materials
- Increase your knowledge of the products LATICRETE
- Find out about the commercial definitions, performance requirements and industry standards
- Learn to resolve and avoid problems with using our products
- Take part in practical product demonstrations
- LATICRETE technical training centers in Europe are located in Italy and Norway. We are also happy to coordinate training courses directly at the headquarters of our customers.

SOCIAL MEDIA

Follow LATICRETE® Europe on social media and be the first to find out the news about our products!

We'll keep you up-to-date on:

- News from the industry and the market
- The secrets of a perfect installation
- Coming events on technical training
- Promotions

Let yourself be captivated by the world of LATICRETE.



DEDICATED TECHNICAL SERVICE,
CONTACT US BY EMAIL

technicalservices@laticreteurope.com

Follow us!



@laticreteurope



@Laticrete-Europe-srl



@laticreteurope





ROOTED IN INNOVATION, GROWING FOR EXCELLENCE

OUR BRAND PROMISES



INNOVATIVE



COMMITTED TO
SUSTAINABILITY



ENABLING
ICONIC DESIGN





TRUSTED
FOR LIFE



BEST INSTALLER
EXPERIENCE



OUR CUSTOMERS
ARE OUR FAMILY

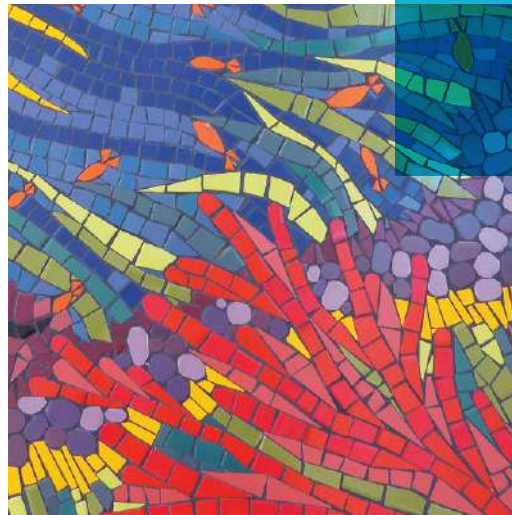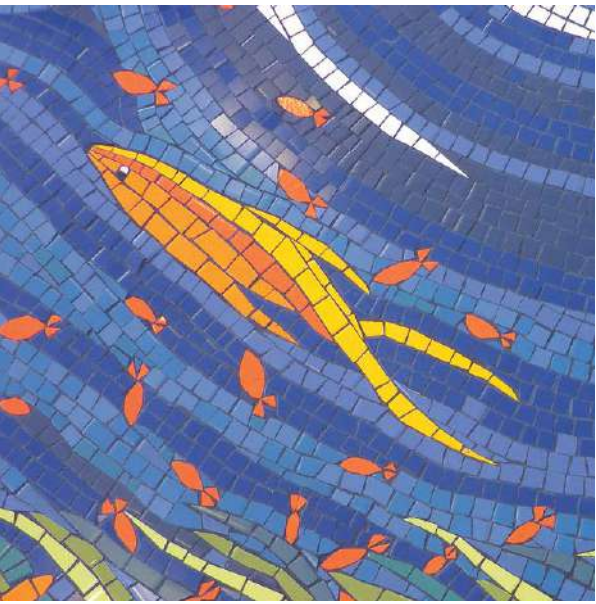

OUR VALUES

The core principles, in line with our brand promises, that guide the conduct and actions of our team as members of our LATICRETE® family.

WHAT WE SHARE, WHILE BEING DIFFERENT

OUR DIVERSITY IS OUR STRENGTH.

At LATICRETE® we share common values that inspire us to grow together while respecting each colleague's uniqueness.

A great professional life experience

Our values are both a need and an aspiration. We make them a reality in our attitudes, behavior and actions. Every member of the LATICRETE family has the job of ensuring that our values are experienced every day.

TRUST & INTEGRITY
PASSION & COMMITMENT
INNOVATION
CUSTOMER CENTRICITY
GROWING TOGETHER
CARING

The link between all generations within LATICRETE

Our values are gifts we have received from our "founding" generation. We are enriching these values to inspire new talents that are joining us in the LATICRETE adventure.

Our values inspire and motivate our employees to strive for excellence and are close to our clients through our brand promises. Thanks to them, LATICRETE is stronger, more attractive and we are all more successful.

REFERENCES AND PROJECTS

1999 – PETRONAS TWIN TOWERS, KUALA LUMPUR, MALAYSIA



2008 – OPERA HOUSE, OSLO, NORWAY




2011 – MARINA BAY SANDS INFINITY POOL, "POOL IN THE SKY"



2008 – THE BEIJING NATIONAL AQUATICS CENTRE (THE "WATER CUBE"), BEIJING, CHINA



2015 – MARRIOTT PARAGRAPH HOTEL, BLACK SEA BATUMI, GEORGIA

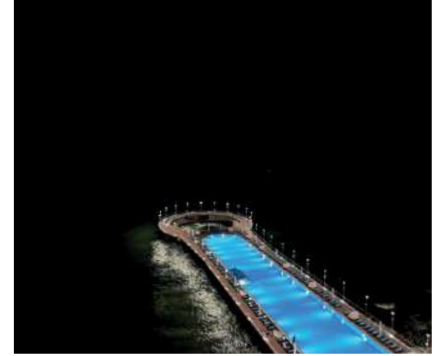

2016 – THE RITZ-CARLTON SPA & POOL



2017 – VOSSABADET INDOOR SWIMMING CENTRE, VOSS, NORWAY



2018 – ART-DECO STYLE SWIMMING POOL AT THE NED HOTEL, LONDON, UNITED KINGDOM



- 1. Contractual Provisions:** These general terms and conditions, subject to any amendments or modifications agreed upon in writing, govern all sales contracts between us and the purchaser, therefore both the contract concluded with order acceptance and any future contracts related to the supply of the products of our company ordered with subsequent separate commissions. Changes in the general terms and conditions of sale, transactions and allowances, even if made by our Agents, shall be binding for us only after our confirmation in writing and, in any case, limited to the contracts to which they refer.
- 2. Scope of Supply:** We shall supply only the services, materials and quantities specified in our order confirmation or in other written communication sent by us. The details outlined in the order confirmation shall prevail in any case of inconsistent details from any other offer or order. Partial execution of an order without prior confirmation does not indicate that we have approved the entire order, but rather partial approval for the goods delivered. In this case, receipt of the goods shall be considered acceptance by the purchaser of the new contractual proposal.
- 3. Order Confirmation:** If in our order confirmation there are any differences in the single items of which it is composed in relation to the agreements or orders, the purchaser must challenge these discrepancies by registered letter sent within ten (10) days of receiving the order confirmation, otherwise the purchaser shall accept the order as indicated in the order confirmation.
- 4. Deliveries:** The goods, even if sent freight-paid or free delivered to the buyer's premises, travel at the risk and responsibility of the purchaser. All our responsibility ends upon delivery to the carrier, against whom the purchaser, after making the appropriate checks, shall make any necessary claims and complaints.
- 5. Delivery Terms:** The deadline for the delivery of the goods must be mutually acceptable to both parties. Except for the inclusion of particular clauses, it must be considered purely indicative and not binding. When changes are made to the contract, the delivery date may be extended for a period equal to what was originally agreed to. Any event of force majeure may suspend the delivery deadline for its entire duration. If by reason of force majeure the contract cannot be executed within 60 days of the date agreed upon, both parties shall be entitled to withdraw from the contract. In this event, the declaration of withdrawal must be sent to the counterparty by registered letter with return receipt within ten (10) days following the expiration of the aforementioned 60 days, mutually excluding reciprocal rights to indemnity or compensation.
- 6. Payments:** The place of payment is at our headquarters in Castelnuovo Rangone, even in the case of issuing bank drafts or receipts, or the issuance of promissory notes. Any deviation to the aforementioned shall be valid only if approved by us in writing. A delay in payment, even partial, of our invoices beyond the stipulated due date shall result in the immediate application of default interest, calculated at the official discount rate increased by 6 points. Furthermore, the non-payment or delayed payment of invoices, for whatever reason, shall give us the right, without prejudice to any other action, to demand advance payment for any remaining supply, or to consider the contract temporarily suspended or even permanently terminated, and to cancel any other pending orders in progress, without the purchaser being able to make any claims for compensation or indemnification.
- 7. Solve et repete:** Except for nullity, annulment and termination of the contract, no exception may be invoked by the purchaser in order to delay or avoid payment.
- 8. Ownership:** If payment must be made, in whole or in part, after delivery, as required by contractual agreement, any delivered products remain our property until receipt of the full payment of the price.
- 9. Warranty:** Subject to the conditions and limitations stated below, LATICRETE Europe S.r.l a socio unico ("LATICRETE Europe") warrants that its products will be free from manufacturing defects and will not break down or deteriorate under normal usage for a period of one (1) year from the date of purchase when installed in accordance with the written specifications of LATICRETE Europe and industry standard guidelines. Our materials are guaranteed to comply with the Construction Products Regulation (EU) No. 305/2011 and the European Norms (EN) standards currently in force. LATICRETE Europe is not responsible for any defects and / or faults found on PRODUCTS that are not due to the quality of the PRODUCTS themselves but instead due to their improper use by the Purchaser and/or their assignees. In particular, LATICRETE Europe shall not accept any claims or complaints in connection with the situations described above. To make a claim under this limited warranty (for any claims and complaints), it is necessary to notify LATICRETE Europe in writing, solely at our registered headquarters of Castelnuovo Rangone (MO), within thirty (30) days of the discovery of the alleged manufacturing defect. At the discretion of LATICRETE Europe, it may be required, as a condition of this limited warranty, to provide proof of product purchase and use. Any claims made on the material do not give the right to the Purchaser to suspend or delay, in whole or in part, the payment within the agreed terms, in accordance with the above Article 7. Refer to the warranties (www.latcrete.eu): DS 230.13EU: 1 year of product warranty. Contact technical service for additional information (technicalservices@latcreteeurope.com).
- 10. Returns:** Upon written request of the purchaser and approval confirmation from LATICRETE Europe S.r.l a socio unico, product packages that are intact, undamaged and not yet expired can be returned to the seller's warehouse at the expense of the customer. The returned goods shall be invoiced at 25% of the purchase price. Returns cannot be made more than 15 days after delivery.
- 11. Disputes:** Any dispute relating to the conclusion, performance and interpretation of this contract is under the exclusive and absolute jurisdiction of the Court of Modena.
- 12. Minimum sales quantities:** LATICRETE® adhesives, screeds and cement-based waterproofing products all have minimum order requirements (600 kg). Please contact customer service for details.

Sales terms and conditions are subject to change without notice

Valid from August 2023

YOUR IDEAL PARTNER

IN
INSTALLATION
PROJECTS



**COMPLETE SYSTEMS:
PREPARATION | APPLICATION | FINISHING**



Globally Proven Construction Solutions

www.laticrete.com



LATICRETE Europe S.r.l. a socio unico - Via Paletti, snc, 41051
Castelnuovo Rangone MO, Italia - +39 059 535540