


GROUTS AND SEALANTS LINE





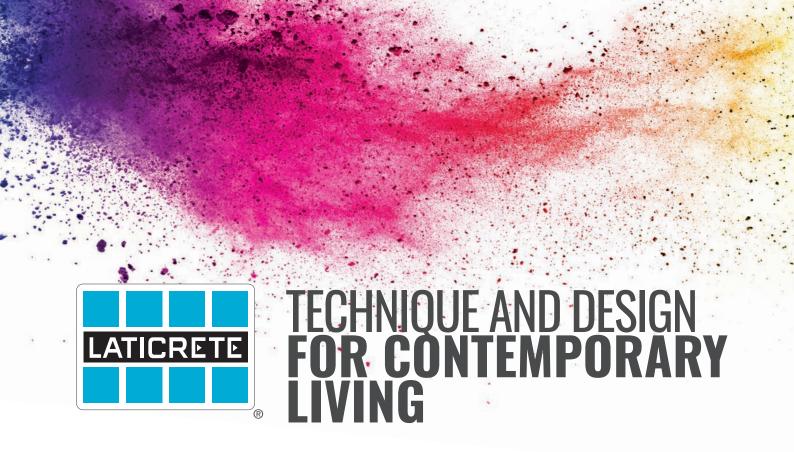

The perfect synthesis of technology and design for today's living. Over 40 colours to meet every design need.



SPECTRALOCK® PRO PREMIUM GROUT | SPECTRALOCK® PRO PREMIUM TRANSLUCENT GROUT | SPECTRALOCK® 2000 IG PERMACOLOR® SELECT | PERMACOLOR® SELECT FINE | PERMACOLOR® (NEW) | COLORBASE FS (NEW) | COLORBASE FL (NEW) LATASIL™ | LATASIL™ AC (NEW)





Package: 5.5 kg bag Unit of sale: box of 4 bags









MICROBAN[®]

NO VERTICAL SAG, NO FADING, NO EXPIRY.

PERMACOLOR® SELECT

Rapid setting cement-based grout for joints from 1.5 mm up to 12 mm

PERMACOLOR® SELECT is a high performance rapid setting cement-based grout that was the first to permit colouring with COLOR KIT — water-soluble pigments, to be added to the white base. Easy to mix, use and clean, PERMACOLOR SELECT is for joints on floors, walls and swimming pools.

- For swimming pools, fountains and other applications in constant immersion
- Requires no additional treatments contains STONETECH® sealer technology
- Contains MICROBAN® anti-microbial protection mould resistant
- · Fibre reinforced crack and shrink resistant
- Rapid setting ready for foot traffic in as little as 3 hours
- Single white base. The colour is obtained by mixing the COLOR KIT, available in 40 colours, with water
- Max grain size: ~ 0.3 mm
- Pot life: ~ 60 min
- Foot traffic: ~ 3 hours
- Available in 40 colours





Package: 3.6 kg bag Unit of sale: box of 4 bags











PERMACOLOR® SELECT FINE

High performance rapid cement-based fine grout for joints from 1 mm to 6 mm

PERMACOLOR® SELECT FINE is a high performance rapid cementbased fine grout designed for extremely delicate surfaces. Technology with pigments contained in water-soluble pods, COLOR KIT, to be added to the white base. Easy to mix, use and clean, PERMACOLOR SELECT FINE is a grout for joints on floors, walls and in swimming pools.

FEATURES & BENEFITS

- For swimming pools, fountains and other applications in constant immersion
- · Low VOC emissions safe and easy to install
- Ideal for extremely delicate surfaces such as prefinished marble
- Requires no additional treatments contains Stonetech® Sealer Technology
- Contains Microban® anti-microbial protection mould resistant
- Anti-shrinkage and anti-cracking
- Rapid setting ready for foot traffic in as little as 3 hours
- Single white base. The colour is obtained by mixing the COLOR KIT, available in 40 colours, with water
- Complies with class CG2 WA as per EN 13888
- Max grain size: ~ 0.15 mm
- Pot life: ~ 60 min
- Foot traffic: ~ 3 hours

EASY TO MIX COLOR KIT AVAILABLE **IN 40 BRIGHT COLOURS**

Exclusive **COLOR KIT** system that permits colouring with pigments contained in water-soluble pods to be mixed with the unique white neutral















Package: 2.5 kg bag Unit of sale: box of 4 bags











PERMACOLOR®

High-performance rapid cement-based grout for joints up to 10 mm

PERMACOLOR® SELECT FINE is a high-performance rapid setting cement-based ultra-fine grout for joints up to 10 mm. Easy to mix, use and clean, PERMACOLOR is for joints on floors, walls and swimming pools.

- For swimming pools, fountains and other applications in constant immersion
- Low VOC emissions safe and easy to install
- Requires no additional treatments contains STONETECH® Sealer Technology
- Contains MICROBAN® anti-microbial protection mould resistant
- · Fibre reinforced crack and shrink resistant
- Rapid setting ready for foot traffic in as little as 3 hours
- Exclusive Water Dispersion Technology for colour durability and aesthetics
- Max grain size: ~ 0.3 mm
- Pot life: ~ 60 min
- Foot traffic: ~ 3 hours
- Available in 20 colours



Package: 5 kg and 20 kg bag Unit of sale:

- box of 4 bags of 5 kg each
- 20 kg bag



COLORBASE FS

Cement-based fine grout for joints from 1 to 8 mm

COLORBASE FS is a cement-based grout with a fine grain size, for making grout joints with glass mosaic, ceramic tiles, stone and marble. For interior and exterior applications, on floors and walls.

- Complies with class CG2 WA as per EN 13888
- · Easy to use and excellent workability
- Low VOC emissions (EC1 Plus)
- With very low water absorption and high abrasion resistance
- Mould resistant
- Max grain size: ~ 0.15 mm
- Pot life: ~ 30 min
- Foot traffic: ~ 24 hours
- Available in 16 colours







Package: 25 kg bag



COLORBASE FL

Cement-based coarse grain grout for joints from 3 to 30 mm

COLORBASE FL is a cement-based grout for joints of from 3 to 30 mm for ceramic tiles, thin brick, stone and marble. For interior and exterior applications, on floors and walls.

- Easy to use and excellent workability
- Low VOC emissions (EC1 Plus)
- With very low water absorption and high abrasion resistance
- Mould resistant
- Max grain size: ~ 0.5 mm
- Pot life: ~ 90 min
- Foot traffic: ~ 6 hours
- · Available in 10 colours





Package: 3.2 kg pail (Part A 0.35 kg – Part B 0.35 kg – Part C 2.5 kg)



MICROBAN

SPECTRALOCK® PRO PREMIUM GROUT

Waterproof three-component epoxy grout

SPECTRALOCK® PRO PREMIUM GROUT Three-component epoxy grout with ultra-long pot life for joints from 1.5 to 12 mm in ceramic tiles, mosaics and natural stone, waterproof, stainproof, adjustable consistency, oxide-free, EN 13888 RG, patented technology.

- Ideal for submerged applications: swimming pools, fountains and water features
- High stain resistance
- Thixotropic formula for walls and floors
- Three-component, lets you regulate the consistency
- · Maintenance free and does not fade
- Ideal for installations with broad temperature ranges
- Max grain size: ~ 0.3 mm
- Pot life: ~ 80 min
- Foot traffic: ~ 24 hours
- · Available in 40 colours









Package: 3.2 kg pail (Part A 0.35 kg – Part B 0.35 kg – Part C 2.5 kg)



MICROBAN[®]

SPECTRALOCK® PRO PREMIUM TRANSLUCENT GROUT

Translucent and anti-stain threecomponent epoxy grout

Translucent version of SPECTRALOCK® PRO PREMIUM GROUT, an epoxy sealant mortar combining a long life and dirt resistance with extreme ease of use.

- Translucent lets light through
- Ideal for submerged applications for swimming pools, fountains and water features
- For many types of tiles
- Strong, long-lasting and resistant to cracking
- Complies with class RG as per EN 13888
- Compressive strength: ~ 55.0 N/mm2
- Water absorption after 240 min: ~ 0.05 g
- Max grain size: ~ 0.3 mm
- Pot life: ~ 80 min
- Foot traffic: ~ 24 hours





Package: 11.2 kg pail (Part A 2x0.52 kg Part B 2x0.98 kg Part C powder 2x4.1 kg)




MICROBAN[®]

Three-component epoxy grout particularly suited for industrial settings highly resistant to chemical agents

SPECTRALOCK® 2000 IG is an epoxy grout highly resistant to chemical agents, recommended for sealing joints of ceramic tiles of every type.

SPECTRALOCK® 2000 IG combines high mechanical strength, durability and extraordinary chemical resistance to the most common corrosive substances, cleaners, foods and beverages.

- High chemical resistance
- Excellent temperature resistance ideal for cold storage rooms
- Equipped with antimicrobial technology
- · Highly resistant to bacteria
- Washable with water
- Low VOC emissions (EC1) better indoor air quality
- Fast curing, even cures at low temperature
- Exceeds ANSI 118.3 (Epoxy) and ANSI 118.5 (Furan)
- Available in 40 colours

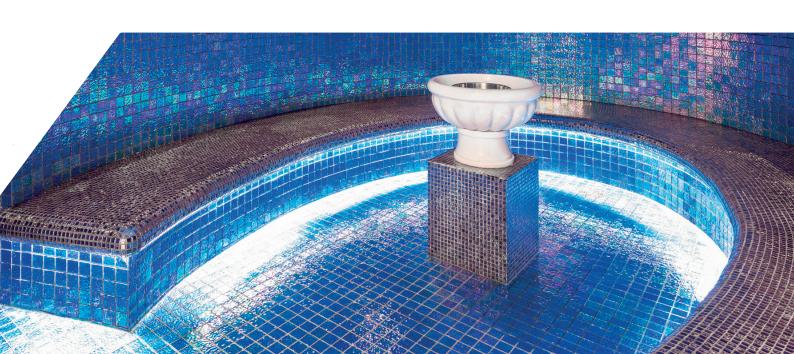





LATASIL[™]

High performance single-component elastomeric universal silicone sealant with fungicide

LATASIL™ is a silicone sealant with neutral curing, designed to be used with ceramic tiles and stone.

Package: 310 ml cartridge. Unit of sale: box of 12 cartridges

FEATURES & BENEFITS

- Complies with EN 15651 parts 1,2,3 and 4
- Curing time: ~ 15 min
- Setting speed: ~ 2 mm/24 hours
- Universal sealant ideal for natural stone, sanitary areas, swimming pools,* façades, cold storage rooms and more besides
- Superior adhesion, especially on stone, metals and glass
- Antimicrobial and fungicidal inhibits the onset of mould and growth of bacteria
- Low VOC emissions safe for the environment and for health,
- Excellent weatherability, resistance to ageing, UV radiation and chemical agents





LATASIL™ AC

Acetic sealant with a low elastic modulus for ceramic tiles and bathroom fixtures

LATASIL AC™ is a silicone sealant with acetic curing, low module, bactericide and fungicide, for ceramic tiles and bathroom fixtures



Package: 310 ml cartridge.

Unit of sale: box of 12 cartridges

- · Superior adhesion, bactericide and fungicide
- · Ideal for ceramic tiles, glass, clinker, bathroom fixtures, aluminium, anodised aluminium, plastic and painted surfaces
- Easy to extrude and smooth
- Skin forming time: approximately 20 min
- Curing speed: approximately 3 mm / 24 hours
- Tensile strength: approximately 0.7 N/mm²
- Extension to break: approximately 250%





GROUTS AND SEALANTS LINE COLOURS

364		CDLCLD VI UCK®	CDECTRAL OCK®	DEDMACOLOD®	PERMACOLOR®	PERMACOLOR®	COLORBASE FS		LATASIL™	LATASIL™AC
3		SPECTRALOCK® PRO PREMIUM GROUT	2000 IG	SELECT	SELECT FINE	PERMAGULUR®	COLORBASE 12	COLORBASE FL	TAIA2IL	LAIASIL'"AU
	03 Silk	•	•	•	•		•			•
	04 Arctic Blue	•	•	•	•					
	05 Pastel Blue	•	•	•	•					
	16 Siltstone	•	•	•	•					
i.	17 Marble Beige	•	•	•	•	•			•	•
	18 Sauterne	•	•	•	•	•				•
	22 Midnight Black	•	•	•	•	•	•			•
	23 Antique White	•	•	•	•		•	•		•
	24 Natural Grey	•	•	•	•	•	•*	•		•
	27 Hemp	•	•	•	•	•				
	30 Sand Beige	•	•	•	•	•	•			•
	33 Boston Fern	•	•	•	•		•			
	35 Mocha	•	•	•	•					•
	37 Chambray	•	•	•	•					
	38 River Rock	•	•	•	•	•				
	39 Mushroom	•	•	•	•					
	40 Latte	•	•	•	•	•				
	41 Kashmir		•	•	•					
	42 Platinum	•	•	•	•	•	•*			•
	43 Chocolate Truffle	•	•	•	•		•			
	44 Bright White	•	•	•	•	•	•*		•	•
	45 Raven	•	•	•	•	•	•*		•	•
	50 Sea Glass	•	•	•	•					
	52 Toasted Almond	•		•	•					
	53 Twilight Blue	•	•	•	•	•				
	55 Tawny	•	•	•	•					
	56 Desert Khaki	•	•	•	•	•				
	58 Terra Cotta	•	•	•	•		•			
	59 Espresso	•	•	•	•		•			
	60 Dusty Grey	•	•	•	•	•	•			•
	61 Parchment	•	•	•	•	•	•		•	•
	66 Chestnut Brown	•	•	•	•		•			•
	78 Sterling Silver	•	•	•	•	•	•	•	•	•
	81 Butter Cream	•	•	•	•		•	•		•
	85 Almond	•	•	•	•	•	•	•		•
	88 Silver Shadow	•	•	•	•	•	•			•
	89 Smoke Grey	•	•	•	•	•	•*	•	•	•
	90 Light Pewter	•	•	•	•	•				•
	91 Slate Grey	•	•	•	•					
	92 Saltillo	•	•	•	•					
	00 Translucent									•

^{* 20} kg format available

The grouts and sealants colour card is given merely as a guide. LATICRETE® Europe Srl does not warrant colour matching to this colour chart or to any colour guide produced. Actual shade and texture will depend on the product used, job site conditions, lighting, installation techniques and the colour and nature of the coating. Perform an application test outside the work and assess colour suitability after drying. No claims for colour shade variations will be honoured.

YOUR CHISSION



For the Builders of a Better World™







Laticrete Europe S.r.l. a socio unico - Via Paletti, snc, 41051 Castelnuovo Rangone MO, Italy +39 059 535540