



**LATICRETE®  
SYSTEM**

**ALL THE  
EXCELLENCE  
IN ONE  
SYSTEM**

**SWIMMING POOLS  
& SPAS**

For the Builders of a Better World™



# LATICRETE® SYSTEM

LATICRETE®, a leader in the field of complete solutions for the installation of ceramic tiles, marble and natural stone, presents its system, guaranteed for 10 years, for swimming pools: LATICRETE® SYSTEM – SWIMMING POOLS & SPAS. This certified and guaranteed system is the apex of the experience and reliability offered by LATICRETE® within the framework of constantly submerged installations, successfully used all over the world.



## Fast and Easy Installation

LATICRETE® products ensure fast and easy installation, helping to reduce work times and increase overall productivity.



## Chemical Resistance

LATICRETE® grouts and epoxy adhesives ensure greater chemical resistance than traditional cement-based products, making them ideal for applications in swimming pools and similar environments.



## Proven Reliability

Over 65 years of success in constructions made worldwide by LATICRETE® are synonymous with duration and excellent quality, also under water and in places subject to continual stress.



## Superior Adhesive Strength

Thanks to the advanced technology of our cements reinforced with polymers and epoxy adhesives, our solutions offer superior adhesive strength to the sector standard (EN, ANSI), ensuring reliable bonding over time.





The LATICRETE®  
SWIMMING POOLS & SPAS System is the ideal choice  
when you want

# Reliability Quality and Complete Support

## FOR PROJECTS FOR SWIMMING POOLS AND SPAS

LATICRETE® offers the necessary certainty and peace of mind to obtain outstanding results for every project.



**LATICRETE® offers a ten-year warranty on all its installation systems, guaranteeing quality and duration over time.**

Consult the warranty methods for more details.



**Just One Supplier, Many Solutions:**

Having access to a vast range of essential materials (substrates, waterproof membranes, adhesives for tiles, grouts) – provided by a single reliable supplier – not only simplifies managing materials, but also ensures perfect integration and compatibility between system components.



**Our team of experts is available to provide customised consultation and custom application details for your specific needs.**

For your greater peace of mind on site, our technicians are ready to assist you directly on the field, whenever and wherever necessary.



## 8510 BONDING ADMIX + 211 POWDER

- Versatile - a single product for interior, exterior and submerged applications
- Improved workability and easy to use
- Low VOC content
- Can be used directly on steel
- Ideal for use on ships and swimming pools before waterproofing

## HYDRO BAN®

- Ready-to-use - it is applied quickly with a brush and roller
- Fast setting - allows performing seal tests after just 2 hours
- Inhibits the onset of mould and bacteria thanks to the antimicrobial protection Microban®
- Antifracture for shrinkage cracking and non-structural cracks of up to 3mm
- Does not require using reinforcement fabric
- Safe - it contains no solvents and is non-flammable
- Adheres directly to metal and PVC pipes
- Permits direct bonding of ceramic tiles, stone and marble

## LATAPOXY® WATERPROOFING FLASHING MORTAR

- Three-component epoxy waterproofing membrane. Designed to be used to waterproof seams, gaps or joints between different types of substrates, metal and PVC pipes.
- Fast-acting
- High adhesion and flexibility
- Easy to apply with a trowel
- Adheres to metal, PVC, gutters
- For waterproofing points of contact between different materials (steel-concrete)

## 335 MAXI S

- Little dust and low VOC emissions - better indoor air quality
- Excellent workability - multi-consistency
- Non-sag good for vertical applications
- Ideal for large-sized tiles
- Long open time
- Available in ultra white and grey

## Alternatively it is possible to use

### 4237 LATEX ADDITIVE + 211 POWDER

Invented in 1956, it is the first two-component cement-based thin-layer system.

- For indoor and outdoor use
- High adhesion and mechanical strength
- Frost and weather resistant
- Flexible and impact resistant
- Low VOC emissions

### SPECTRALOCK® PRO PREMIUM GROUT

- Ideal for submerged applications - for swimming pools, fountains and water features
- High stain resistance
- Thixotropic formula for walls and floors
- Strong, long-lasting and resistant to cracking
- Even colour - three-component, lets you regulate the consistency
- Maintenance free and does not fade
- Ideal for installations with broad temperature ranges
- Meets the requirements of ANSI A118.3, ISO 13007-3 RG and EN 13888 RG

### LATASIL™ PRIMER

- Waterproof, single-component primer
- For indoor and outdoor use
- Ready-to-use
- Rapid drying
- It forms a highly resistant and non-porous membrane

### LATASIL™

- Universal sealant - ideal for natural stone, sanitary areas, swimming pools, façades, cold storage rooms and more besides
- Superior adhesion, especially on stone, metals and glass
- Antimicrobial and fungicidal - inhibits the onset of mould and growth of bacteria
- Low VOC emissions - safe for the environment and for health,
- Excellent weatherability, resistance to ageing, UV radiation and chemical agents



## SUBSTRATE PREPARATION

### 8510 BONDING ADMIX + 211 POWDER

8510 BONDING ADMIX is a concentrated latex additive designed to be used with 211 POWDER to create a high performing levelling and smoothing compound. Designed for submerged applications directly in contact with steel.

This product has a low VOC content.



## WATERPROOFING

### HYDRO BAN®

### LATAPOXY® WATERPROOFING FLASHING MORTAR

HYDRO BAN® is a thin waterproofing membrane that does not require the use of reinforcement fabric of synthetic fibre, not even near corners and edges.

HYDRO BAN® is a single-component polymer made from self-setting liquid synthetic rubber that after completely curing forms a highly flexible continuous membrane. It adheres directly onto many backings.

LATAPOXY® WATERPROOFING FLASHING MORTAR is a three-component epoxy product designed specifically to be applied with a trowel like a waterproofing membrane.





## GROUTING

### SPECTRALOCK® PRO PREMIUM GROUT

SPECTRALOCK® PRO PREMIUM GROUT is a high performance epoxy grout featuring extraordinary colour uniformity and durability along with ease of use.




## SEALING

### LATASIL™ PRIMER + LATASIL™

LATASIL™ Waterproof single-component primer, resistant to moisture and continuous immersion in water.

LATASIL™ is a silicone sealant with neutral curing, designed to be used with ceramic tiles and stone.

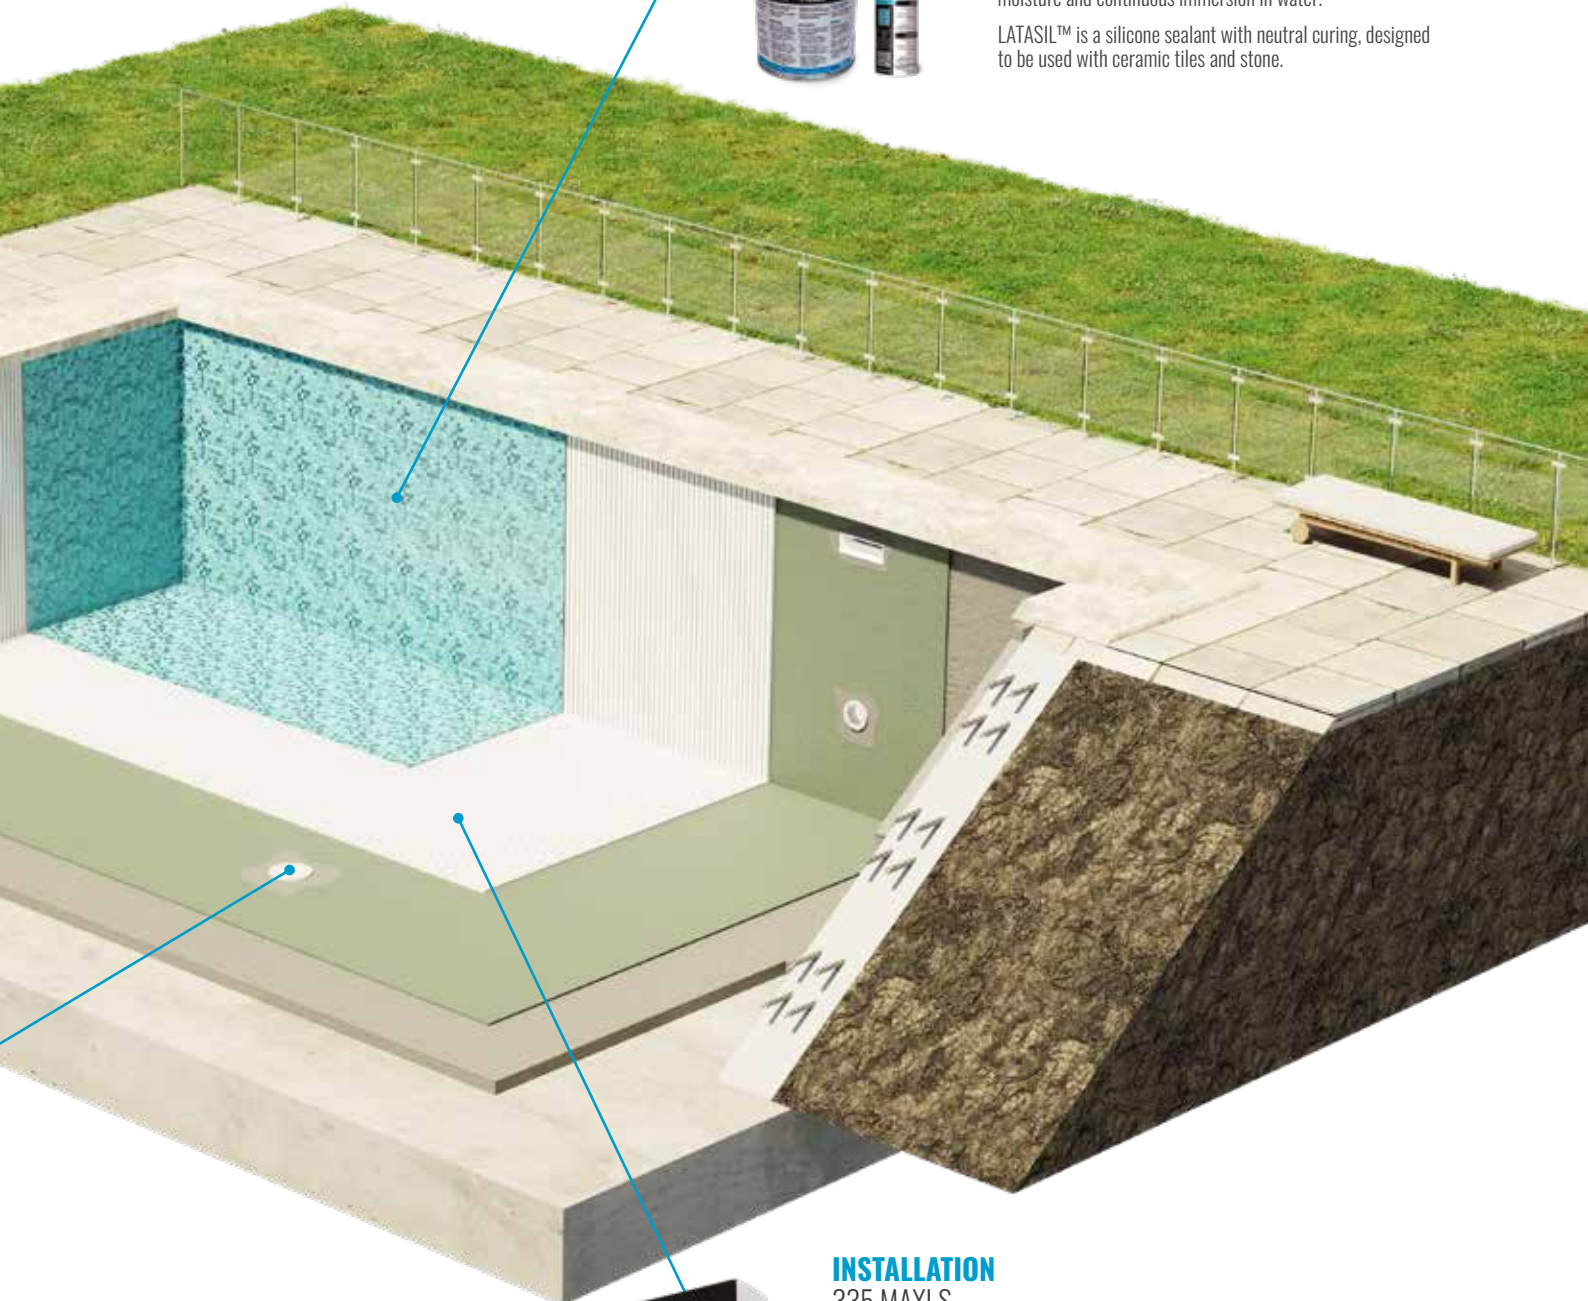

## INSTALLATION

### 335 MAXI S

335 MAXI S is a highly flexible adhesive, multipurpose with low dust, designed for quickly installing stone and ceramic tiles, porcelain and glass; 335 MAXI S is ideal for large format tiles and ideal for vertical applications.

Alternatively:  
4237 LATEX ADDIVITE + 211 POWDER  
two-component, cement-based, flexible system reinforced with latex for thicknesses from 3 mm up to 15 mm.



# YOUR CHOICE OUR MISSION



For the Builders of a Better World™



Laticrete Europe S.r.l. a socio unico - Via Paletti, snc, 41051  
Castelnuovo Rangone MO, Italy +39 059 535540