




**For the Builders
of a Better World™**

Admix and Primer

Admix and Primer is a latex primer for use with Self-levelling products. Product is for interior use only

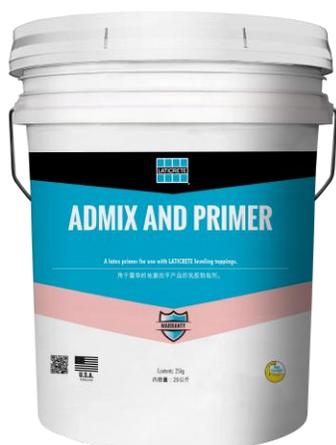

FEATURES/BENEFITS

- Easy to use
- Reduces pinholes
- Allows for proper hydration of self-leveling underlayment & overlayment
- Increases bond strength

MANUFACTURER

LATICRETE (Malaysia) Sdn Bhd
#18-08, Faber Tower 2, Jalan Desa
Bahagia, Taman Desa,
58100 Kuala Lumpur, Malaysia
Tel: +603 7989 9188 Fax: +603 7972
0331
Internet: <https://ma.laticrete.com>

SUITABLE SUBSTRATES

- | | |
|----------------------|------------------------|
| ▪ Concrete | ▪ Cement Terrazzo |
| ▪ Cement Mortar Beds | ▪ Ceramic Tile & Stone |
| ▪ Concrete Masonry | ▪ Cement Backer Board* |

* Consult manufacturer for specific installation recommendations and to verify acceptability for exterior use

USES

A re-emulsifiable bonding agent designed to be used with self-leveling underlayment and overlayment

PACKAGING / COLOUR

20ℓ/pail, 36 per pallet

Approximate Coverage

20L of Admix and Primer yield approximately 160m² per coat

Shelf Life

Factory sealed containers of this product are guaranteed to be of first quality for two (1) years if stored off the ground at temperatures > 0°C and < 40°C

Limitations

- Interior Use Only
- Do not install when surface temperature is below 8°C or when ambient temperature is expected to be below 10°C during placement or before material takes final set
- Adhesives/mastics, mortars and grouts for ceramic tile, pavers, brick and stone are not replacements for waterproofing membranes. When a waterproofing membrane is required, use HYDRO BAN

Cautions

Consult MSDS for more information

- During cold weather, protect finished work from traffic until fully cured
- Keep out of reach of children

INSTALLATION**Surface Preparation**

All surfaces should be between 8°C and 35°C structurally sound, clean and free of all dirt, oil, grease, loose peeling paint, concrete sealers or curing compounds. Remove all dust by vacuuming. Skim coat existing ceramic tile or stone with a Latex Thin-Set mortar

Application

Instructions for use as a primer for self-leveling applications: Use Admix and Primer with every application. Shake thoroughly before using. Pour, mop, or spray primer onto the surface. Apply an even thickness to the prepared substrate using a bristle broom. Make sure to work into the substrate, removing any puddles or thick areas. Allow the primer to dry to a clear film (~30 to 45mins depending on the site conditions) before application of underlayment. Very dry or porous slabs will require double priming if diluted with water

Cleaning

Clean tools with water while primer is fresh

AVAILABILITY AND COST**Availability**

LATICRETE materials are available worldwide

For distributor information, call:

Telephone: +603 7989 9188

Fax: +603 7972 0331

For online distributor information, visit LATICRETE at <https://ma.laticrete.com>

Cost

Contact a LATICRETE distributor in your area

WARRANTY

LATICRETE (Malaysia) Sdn Bhd warrants that Admix and Primer is free from manufacturing defects and will not break down, deteriorate or disintegrate under normal usage for a period of one (1) year from date of purchase subjected to terms and conditions stated

† United States Invention Patent No.: 6,881,768 (and other Patents)

TECHNICAL SERVICE/CONTACT

Technical Assistance

Information is available by calling:

LATICRETE (Malaysia) Sdn Bhd
#18-08, Faber Tower 2, Jalan Desa Bahagia,
Taman Desa, 58100 Kuala Lumpur,
Malaysia
Telephone: +603 7989 9188
Fax: +603 7972 0331
Email: enquiry@laticrete.com.my

Technical and safety literature

To acquire technical and safety literature,
please visit our website at
<https://ma.laticrete.com>