




Waterproofing/Anti-Fracture Fabric

Waterproofing/Anti-Fracture Fabric is a thin, flexible non-woven fabric designed for use specifically with latex based membranes. The Waterproofing/ Anti-Fracture Fabric adds strength to load-bearing waterproofing membranes specifically for the special requirements of ceramic tile, stone and brick installations. A self-curing liquid rubber polymer and the Waterproofing/Anti-Fracture Fabric are quickly applied to form a flexible, seamless membrane that bonds to a wide variety of substrates.

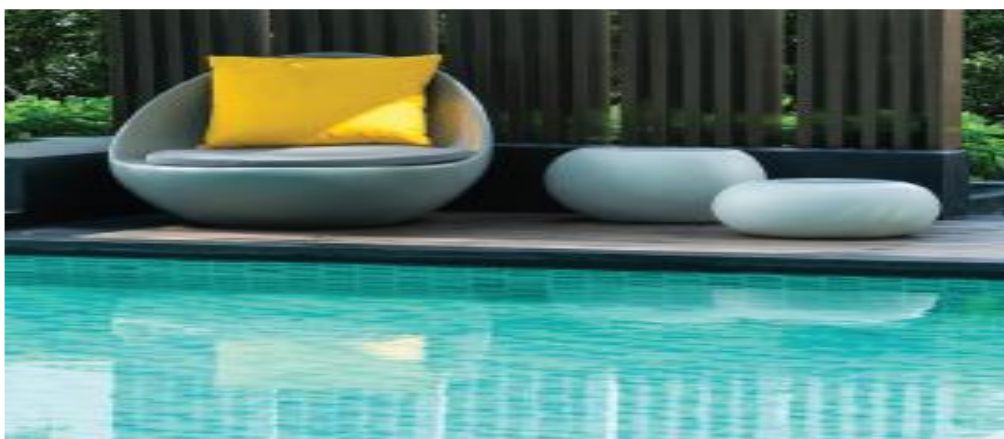

FEATURES/BENEFITS

- Required for use with 9235 Waterproofing Membrane, full fabric applications and Blue 92 Anti-Fracture Membrane
- Required for use with HYDRO BARRIER™ in coves, corner and changes of plain for waterproofing applications
- Can be used with HYDRO BAN®, Air & Water Barrier, WATERTIGHT™ Floor N' Wall Waterproofing & Crack Isolation or 9237 Waterproofing Membrane for added strength
- Interior and exterior use
- Vertical and horizontal surfaces (including ceilings)
- Provides added strength to installation areas with added stress

USES

- See 9235 Datasheet for more information on suitable uses

MANUFACTURER



Made in USA for;

LATICRETE Middle East LLC.
 P.O. Box. 86028, Ras Al Khaimah
 United Arab Emirates
 Toll Free (with in UAE): 8005632
 Telephone: + 971 7 244 6396
 Fax: + 971 7 244 5915
 Website: www.laticrete.me

PACKAGING

- 300 ft² (27.8 m²) roll fabric 38" (965 mm wide)
- 75 ft (23 m) long roll fabric 6" (150 mm wide)

Suitable Substrates

See data sheets for the specific membrane being used for suitable substrates.

Approximate Coverage

See data sheets for the specific latex-based Membrane.

Shelf Life

Factory sealed containers of this product are guaranteed to be of first quality for two (2) years if stored at temperatures >32°F (0°C) and 110°F (43°C).

Limitations

- For installation over Glass Mat Gypsum Exterior Sheathing Panels use Air & Water Barrier only. Refer to DS661.0 & 661.5 for specific installation instructions.
- Do not use with a membrane as a primary roofing membrane over occupied space
- Do not use with a membrane over expansion joints, structural cracks or cracks with vertical differential movement
- Do not use with a waterproofing membrane over cracks >1/8" (3 mm) in width
- Do not use with a waterproofing membrane as a vapor barrier (especially in steam rooms)
- Not for use with a membrane directly over OSB, particle board, luan, Masonite®, or hardwood floors unless specifically stated as a suitable application in the membrane data sheet.
- Do not expose unprotected membranes to sun or weather for
 - >30 days
- Do not expose membranes to negative hydrostatic pressure, excessive vapor transmission, rubber solvents or ketones
- Membranes must be covered with ceramic tiles, stone, brick, concrete, screeds, terrazzo or other traffic-bearing course, unless otherwise noted in specific membrane data sheet. Use protection board for temporary cover.
- Obtain approval by local building code authority before using waterproofing membrane in shower pan applications.
- Do not install a membrane directly over single layer wood floors, plywood tubs/showers/fountains or similar constructs

Cautions

- Protect from traffic or water until fully cured
- Consult specific membrane MSDS for more safety information.

TECHNICAL DATA**Standards/ Certifications**

This product has been certified for Low Chemical Emissions (ULCOM/GG UL2818) under the UL GREENGUARD Certification Program. For Chemical Emissions. For Building Materials, Finishes and Furnishings (UL 2818 Standard) by UL Environment.

Applicable Standards

- ANSI A118.10
- ANSI A118.12
- Germany Tile Association (ZDB) 02–1988
- FHA4900.1 Section 615.5
- Federal Specification TT-C–00555

See the individual membrane data sheets for specific technical data.

Approvals

Go to www.laticrete.com / www.laticrete.me or see the individual data sheets for specific product approvals.

INSTALLATION

Refer to data sheet of specific latex-based membrane for installations instructions.

AVAILABILITY AND COST**Availability**

LATICRETE and LATAPOXY® materials are available worldwide. For Distributor information, call: + 971 7 244 6396

Cost

Contact a LATICRETE Distributor in your area.

WARRANTY

The supplier warrants that the product will not deteriorate under normal conditions and use. The warranty validity of one (1) year.

Contact Technical Support for further information.

MAINTENANCE

LATICRETE products are of high quality designed to achieve lasting installations and avoid maintenance, however performance and durability may depend on properly maintaining products, depending of the cleaning products used.

TECHNICAL SERVICES

Information is available by calling the LATICRETE Technical Service

Telephone: + 971 7 244 6396

Technical and Safety Literature

To acquire technical and safety literature, please visit our website at

www.laticrete.me

www.laticrete.com

Warning

The information and the instructions in the data sheet, although based on knowledge gained through years of applications, are indicative. LATICRETE® unable to directly control the installation conditions and modalities of application of products, do not assume any liability arising from their implementation. Those who want to use the LATICRETE products must conduct adequate tests to determine the site specifications. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation method and site conditions.
