




# Round Edge Profiles Made of Texture Coated Aluminum (RO4)

DS-65363-0425

**Globally Proven  
Construction Solutions**

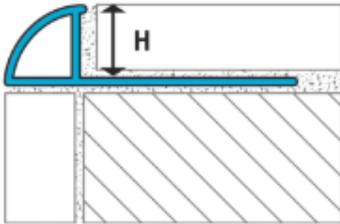

## 1. PRODUCT NAME

Round Edge Profiles Made of Texture Coated Aluminum (RO4)

## 2. MANUFACTURER



Made in Germany for;

**LATICRETE Middle East LLC.**

P.O. Box 86028, Ras Al Khaimah

United Arab Emirates

Toll Free (with in UAE): 8005632

Telephone: +971 7 244 6396

Fax: +971 7 244 5915

Web: [www.laticrete.me](http://www.laticrete.me)

## 3. PRODUCT DESCRIPTION

Round Edge Profiles Made of Color Coated Aluminum are designed for use as both edge protection against chipping and cracking of the unfinished tile edge and as a decorative element for wall and countertop applications. A special powder coating process creates pieces with a slight texture and an attractive matte appearance. Color finishes may be selected to either create a visual contrast and focal point against the tile or to blend into the overall installation allowing the tile itself to remain the focus. Serving as both a functional and decorative piece, the round design creates the finishing touch to any tile installation. Suitable for residential and commercial projects, they can be used indoors and outdoors as an alternative to traditional tile trim. Suitable for residential and commercial projects, they can be used indoors and outdoors as an alternative to traditional tile trim.

## Uses

- Wall applications
- Countertop applications

## Advantages

- May be used for wall or countertop installations
- Creates a clean, professional appearance
- Protect the tile from chipping and cracking
- May be used as a decorative or design element
- Delineate transitions between materials of the same height
- Protects users from sharp edges and corners
- Alternative to traditional tile trim

## Suitable Substrates

- LATICRETE Profiles & Trims are compatible with LATICRETE Adhesive & Mortar products (Refer to the applicable adhesive and mortar data sheet for complete installation instructions and suitable substrates.)

## Limitations

- Not suitable for use in areas subject to high chemical exposure such as swimming pools, commercial kitchens, industrial applications, etc.
- Normal wear and tear of profiles after installation is expected. As such, scratches, dents, corrosion, and/or discoloration resulting from typical use are not considered product defects.

## Cautions


- Follow all tool manufacturer's directions, warning, and safety procedures when cutting and/or trimming profiles
- Cut edges may be sharp. Use caution when handling profiles.

## 4. TECHNICAL DATA

### Applicable Standard

Aluminum 6060 in accordance with DIN EN 755-1 (extruded Aluminum)

## Physical Properties

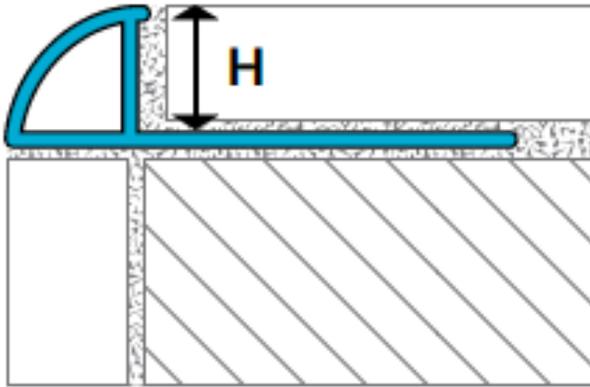

- DKH - Desert Khaki
- HEM - Hemp
- HOC - Hot Cocoa
- TEC - Terra Cotta
- QUR - Quarry Red
- CBR - Chestnut Brown
- ESP - Espresso
- MOC - Mocha
- AUG - Autumn Green
- TWB - Twilight Blue
- PLA - Platinum
- SLG - Slate Grey
- FRO - Frosty
- MIN - Mink
- SIS - Silver Shadow
- STE - Steamship
- SMG - Smoke Grey
- STS - Sterling Silver
- NAG - Natural Grey
- SAS - Sandstone
- DUG - Dusty Grey
- RAV - Raven
- MIB - Midnight Black

Property	Specification
Height	1/4" - 9/16" 6 mm - 15 mm)
Length	8'-2.5" or 10' (2.5 m or 3.0 m)
Nominal Thickness	1/16" (1.5 mm)
Hardness	70 - 80 HB
Melting point (approximate)	1220° F (660° C)

### Available Finishes:

- MBL - Matte Black
- MBW - Matte Brilliant White
- GRG - Greige
- IVO - Ivory
- LAN - Light Anthracite
- STG - Stone Grey

### Available Grout Corresponding Finishes:

- BRW - Bright White
- SAU - Sauterine
- FOS - Fossil
- IRO - Iron
- LIP - Light Pewter
- SIL - Silk
- ANW - Antique White
- WAL - Walnut
- BUC - Butter Cream
- TAL - Toasted Almond
- MBE - Marble Beige
- LAT - Latte
- PAR - Parchment
- SAB - Sand Beige

## Working Properties

### Round Edge Profiles - Typical Uses by Material & Finish

	Floors	Walls	Countertops	Stair
Aluminum		X	X	
Anodized Aluminum		X	X	
Color Coated Aluminum		X	X	
Texture Coated Aluminum		X	X	
Stainless Steel 304	X	X	X	X
Stainless Steel 316	X	X	X	X
Brass		X	X	
PVC		X	X	

Specifications subject to change without notification. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.

## 5. INSTALLATION

### Selecting the Correct Size Profile

Careful selection of the profile size is critical to ensuring the functionality and appearance of the final installation. Profiles should be selected based on the

size of the accompanying tile. Use a profile equal in height or slightly larger than the tile thickness to allow for the profile and tile to sit flush relative to one another when fully installed. Allow for additional space for adhesive when used in combination with large and heavy format tiles.

### **Cutting Aluminum Profiles**

Always refer to the cutting tool manufacturer's instructions, cautions, and requirements prior to cutting profiles. Use appropriate safety equipment and personal protective equipment (PPE) as instructed by the manufacturer of the cutting tool.

Prior to installing the tile, make sure the profiles, corners, and connectors are accurately measured and dry-fitted. Measure and mark the profile to the correct length before cutting. Aluminum profiles may be cut with any of the following tools:

- A miter box and hacksaw with a bimetal blade and the highest teeth per inch (TPI)
- A variable speed angle grinder set to the lowest speed and equipped with a suitable non-ferrous cutting wheel.
- A chop saw or miter saw with a suitable non-ferrous blade.

Once cut, inspect the cut end and use a file to remove any burrs that may have formed during the cutting process. If necessary, the mounting leg may be trimmed using metal or tin snips to avoid interference or overlapping of adjacent profile pieces.

### **Installing Profiles**

All Round Edge Profiles have available inside and outside corners in corresponding sizes and finishes. When using corners as part of the installation ensure that they are accounted for when measuring and cutting. To install corners, begin by placing a small amount of tile adhesive into the end of the profile that will be receiving the corner to help hold it in place while positioning. Insert the corner piece into the end of the profile. The corner should push in easily without the need for excessive force.

Apply tile adhesive with a margin or notched trowel to the area where the profile will be installed. Firmly press the profile into the adhesive, allowing the adhesive to flow through octagonal cutouts in the mounting leg. Adjust and straighten the profile if necessary.

Using an appropriate notched trowel and adhesive for the tile to be installed, add more adhesive over the mounting leg and surface fully embedding the mounting leg of the profile. Press the tile firmly into the adhesive to

achieve full coverage, ensuring the profile and tile are aligned and flush. Leave a 1/16" to 1/8" gap between the profile and tile for grouting. Continue tiling the rest of the area.

Immediately after installing the profiles and tile, clean the surface of the profile to remove any residual adhesive or cement material with clean fresh water and a sponge or microfiber cloth. Aluminum is sensitive to alkaline materials and failure to clean the profile surface can lead to staining or discoloration (oxidation spots) which can be very difficult to remove.

## **6. AVAILABILITY AND COST**

### **Availability**

LATICRETE® materials are available worldwide.

For distributor information,

please contact us by email at: [enquiry@laticrete.me](mailto:enquiry@laticrete.me) or, visit [www.laticrete.me](http://www.laticrete.me)

Contact a LATICRETE® closer distributor to obtain complete information and cost.

## **7. WARRANTY**

The supplier warrants this product will not deteriorate under normal conditions and use, the warranty validity of one (1) year. The product subject to the terms and conditions stated in the LATICRETE® Product Warranty. Please consult our technical support for further information.

## **8. MAINTENANCE**

Aluminum profiles require no special maintenance or care but should be periodically cleaned to maintain their appearance. Clean profiles using fresh clean water and a soft sponge or microfiber cloth, a neutral pH cleaner such as STONETECH® Stone & Tile Cleaner may also be used. If cleaning agents are used, they must be free of hydrochloric and/or hydrofluoric acids. Do not use any abrasive cleaning products as they can scratch or mar the decorative surface.

## 9. TECHNICAL SERVICES

### Technical assistance

For information contact us by email at: [enquiry@laticrete.me](mailto:enquiry@laticrete.me)  
Technical and safety literature To obtain technical and safety literature, please visit our website at: [www.laticrete.me](http://www.laticrete.me)

### Warning:

The information and the instructions in the data sheet, although based on knowledge gained through years of applications, are indicative. LATICRETE® unable to directly control the installation conditions and modalities of application of products, do not assume any liability arising from their implementation. Those who want to use the LATICRETE® products must conduct adequate tests to determine the site specifications. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation method and site conditions.