




Globally Proven  
Construction Solutions

## STONETECH® Epoxy Grout Haze Cleaner

STONETECH Epoxy Grout Haze Cleaner is a fast-acting, water-based liquid designed to safely remove epoxy grout haze from vertical and horizontal tile, concrete and stone surfaces.

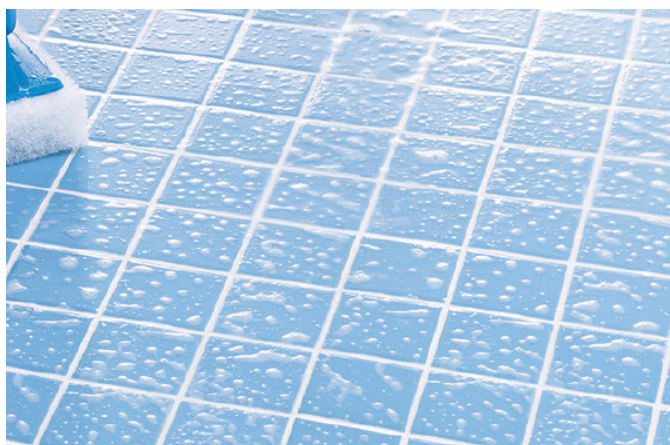

FEATURES/BENEFITS	USES
<ul style="list-style-type: none"> <li>▪ Eliminates epoxy grout haze in 10 minutes or less</li> <li>▪ Safely removes epoxy grout haze</li> <li>▪ Water-based formula</li> <li>▪ Fast-acting - great for vertical and horizontal applications</li> <li>▪ Low odor and non-flammable</li> </ul>	<ul style="list-style-type: none"> <li>▪ All natural-stone surfaces, including slate, marble, granite, ceramic and porcelain tiles</li> <li>▪ Interior and exterior</li> <li>▪ Countertops</li> <li>▪ Backsplashes</li> <li>▪ Floors and Walls</li> </ul>
MANUFACTURER	RECOMMENDED SURFACES
<p><b>LATICRETE Middle East LLC.</b> P.O. Box. 86028, Ras Al Khaimah United Arab Emirates Telephone: + 971 7 244 6396 Fax: + 971 7 244 5915 Internet: <a href="http://www.laticrete.me">www.laticrete.me</a></p>	<p><b>Natural stone, tile, masonry surfaces such as:</b> Granite, Marble, Limestone, Bluestone, Travertine, Sandstone, Slate Flagstone, Quartzite, Concrete, Saltillo, Quarry tile , Ceramic tile, Porcelain tile</p> <p>Not intended for use on surfaces other than stone, tile and masonry.</p>

## Packaging

- Gallon (3.8 L), 4 units per case
- 20 L Pail / 36 per pallet
- 1 ℓ Bottle, 10 Bottles per case

## Approximate Coverage\*

1 U.S. gal. (3.8 L) 7.43 to 18.6 m<sup>2</sup>

\* Coverage will vary depending on density, porosity, texture, surface absorption, time that solution is left on surface, application method and severity of the problem.

## Shelf Life

Factory sealed containers of this product are guaranteed to be of first quality for two (2) years if stored at temperatures 10°C and 32°C.

## Storage and Handling Instructions

CAUTION: MAY CAUSE EYE IRRITATION. Avoid contact with eyes. KEEP OUT OF THE REACH OF CHILDREN. Do not freeze or store above 38 °C. Do not mix with other chemicals.

## Cautions

Consult SDS for more safety information.

- Skin contact: Wash with plenty of water. If skin irritation or rash occurs: Get medical advice/attention. Take off contaminated clothing and wash it before reuse.
- Eye contact: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a poison center/doctor.

## TECHNICAL DATA

### Physical Properties

Form	Liquid
Appearance	Clear liquid
Odor	Typical

## INSTALLATION

### Surface Preparation

Read entire label before using. Use only as directed. Test in a small inconspicuous area to determine ease of application and desired results. Be sure all surfaces to be cleaned are swept or vacuumed to remove loose debris. Ensure work area is well-ventilated during application and until surface is dry. Keep children and pets out of the area until surface use resumes. Avoid contact with surfaces not intended to be treated. Avoid applying in direct sunlight. Should not be used in extreme temperatures.

## Directions

1. SHAKE WELL BEFORE USING. Do not dilute before applying.
2. Liberally apply an even coat of STONETECH® Epoxy Grout Haze Cleaner over the area with a paint brush, mop or paint pad. DO NOT APPLY WITH A SPRAYER. Immediately remove product from unintended surfaces with a wet cloth to prevent potential damage to those surfaces.
3. Do not let product dry on the surface. If it starts to dry, add more to keep surface wet.
4. Agitate surface with a nylon scrub brush or pad after testing a small area first to make sure that brush or pad will not scratch stone. Surface can be wet with water to enable easier removal of epoxy grout haze or coating.
5. Wipe up residual with clean, dry cloth or wet mop. A wet/dry vacuum can be used for larger area.
6. Rinse surface well with clean water.
7. More than one application may be required, repeat steps 1 through 7 when necessary.

SURFACE TRAFFIC MAY BEGIN AFTER 2 – 3 HOURS OR WHEN SURFACE IS DRY.

## AVAILABILITY AND COST

### Availability

LATICRETE® materials are available worldwide.

### For distributor information,

please contact us by email at:

[enquiry@laticrete.me](mailto:enquiry@laticrete.me) or, visit [www.laticrete.me](http://www.laticrete.me)

### Cost

Contact a LATICRETE® closer distributor to obtain complete information and cost.

## WARRANTY

The supplier warrants this product will not deteriorate under normal conditions and use, the warranty validity of one (1) year. The product subject to the terms and conditions stated in the LATICRETE® product warranty. Please consult our technical support for further information.

## MAINTENANCE

Highly alkaline, acidic, ammoniated, abrasive cleaners are not necessary for daily maintenance and may also degrade the sealer, adversely affecting stain resistance. Engineered stone, tile and natural stone routine cleaning

---

with neutral pH cleaners such as STONETECH Epoxy Grout Haze Cleaner ready to use is recommended.

Please note: Prior to using any cleaning material on a tile, stone, etc. installation, test a discrete area or scrap piece of tile to insure desired results. For additional information, please refer to the TDS 262 Stone and Tile Care Guide.

## TECHNICAL SERVICES

### Technical assistance

For information contact us by email at:

[enquiry@laticrete.me](mailto:enquiry@laticrete.me)

### Technical and safety literature

To obtain technical and safety literature, please visit our website at: [www.laticrete.me](http://www.laticrete.me)

**Warning:** The information and the instructions in the data sheet, although based on knowledge gained through years of applications, are indicative. LATICRETE® unable to directly control the installation conditions and modalities of application of products, do not assume any liability arising from their implementation. Those who want to use the LATICRETE® products must conduct adequate tests to determine the site specifications. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation method and site conditions.

---