



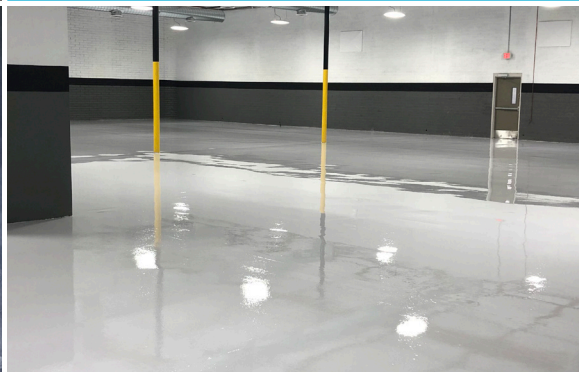

SPARTACOTE® Surface Build

Multi-purpose self-leveling epoxy

NEW

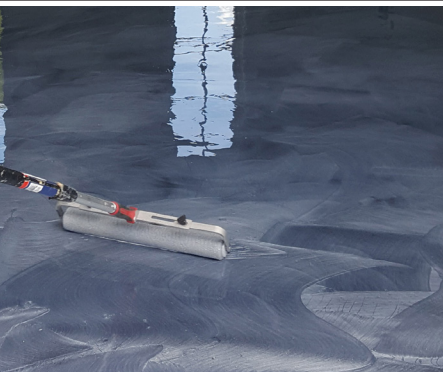

Data Sheet 36644



FEATURES	BENEFITS
Multi-purpose self-leveling epoxy	Eliminates the need to carry and stock multiple epoxies, simplifying ordering, reducing inventory carrying costs and adding greater field flexibility
Improved leveling and working properties	Easy to work with, reducing the number of surface defects and creating a better overall finish
Simple 2 to 1 mix ratio	Easy to field mix; reducing mixing errors and job site waste
Excellent durability	Resistant to stains and spills while having great toughness and wear resistance
Low VOC, low odor	Ideal for interior and occupied areas

Color

- Clear or field tintable with SPARTACOTE Universal Pigments

Packaging

- 5 gal (18.9 L) Kit
 - Part A: 3.3 gal (12.5 L) in a 6 gal (22.7 L) pail
 - Part B: 1.7 gal (6.4 L) in a 3.5 gal (13.2 L) pail

Approximate Coverage

- 80 - 160 ft²/gal (2.0 - 3.9 m²/L)

Suitable Substrates

- Concrete
- Tile
- Existing epoxy flooring

Industries:



- Healthcare
- Education
- Residential
- Manufacturing
- Hotels & Hospitality



SPARTACOTE® Surface Build

Epoxi autonivelante multiuso

NUEVO

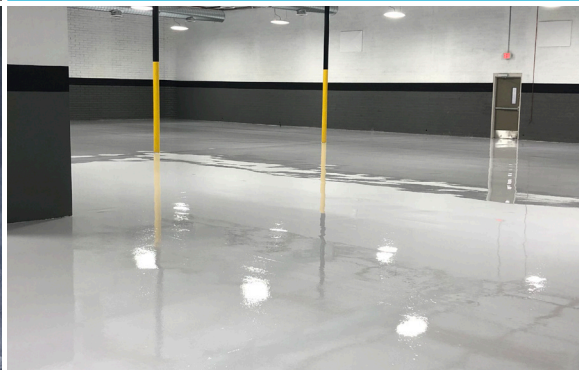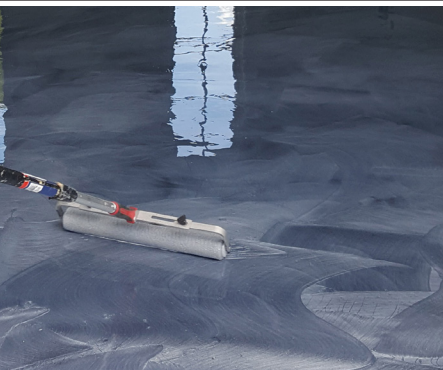

Especificación 36644



CARACTERÍSTICAS	VENTAJAS
Epoxi autonivelante multiuso	Elimina la necesidad de transportar y almacenar múltiples epoxis, lo que simplifica los pedidos, reduce los costos de mantenimiento de inventario y agrega una mayor flexibilidad en el campo
Propiedades mejoradas de nivelación y trabajo	Fácil de trabajar, reduce la cantidad de defectos superficiales y crea un mejor acabado general
Proporción de mezcla simple de 2 a 1	Fácil de mezclar en el campo; menos errores de mezcla y de desperdicio en el lugar de trabajo
Excelente durabilidad	Resistente a las manchas y a los derrames, además de tener una gran dureza y resistencia al desgaste
Bajo en COV, olor suave	Ideal para áreas interiores y ocupadas

Color

- Transparente o coloreable en el campo con los pigmentos universales SPARTACOTE

Presentación

- Kit de 5 gal (18,9 L)
 Parte A: 3,3 gal (12,5 L) en un balde de 6 gal (22,7 L)
 Parte B: 1,7 gal (6,4 L) en un balde de 3,5 gal (13,2 L)

Rendimiento aproximado

- 80 - 160 pies²/gal (2,0 - 3,9 m²/gal)

Sustratos adecuados

- Concreto
- Azulejos
- Pisos de epoxi existentes

Industrias:

- Cuidados médicos
- Educación
- Residencial
- Fabricación
- Hoteles y hospedajes