



LATICRETE PHILIPPINES, INC.

Product Selection Catalog



BUILD BETTER TOGETHER WITH *LATICRETE*

YOUR ONE-STOP-SHOP FOR
CONSTRUCTION SOLUTIONS

- STAIN-PROOF GROUT
- TILE & STONE ADHESIVE
- WATERPROOFING MEMBRANES
- SKIM COAT
- SELF-LEVELING
- TILE & STONE CARE SYSTEMS
- CONCRETE CONSTRUCTION CHEMICALS
- DECORATIVE FINISHES
- EPOXY ADHESIVE

Globally Proven Construction Solutions



Scan for more information



LATICRETE PHILIPPINES, INC.

Globally Proven Construction Solutions



ROOTED IN INNOVATION,
GROWING FOR EXCELLENCE

OUR BRAND PROMISES



INNOVATIVE



COMMITTED TO
SUSTAINABILITY



ENABLING
ICONIC DESIGNS



TRUSTED FOR
LIFE



BEST INSTALLER
EXPERIENCE



OUR CUSTOMERS
ARE OUR FAMILY

ADHESIVES & MORTARS

305 Tile Adhesive 317 Mortar	05
325 FLEX	06
335 HIFLEX	07
254 Platinum	08
4237 Thin-Set Mortar Additive + 211 Crete Filler Powder	09
LATAPOXY® 300 Adhesive	10
LATAPOXY® 310 Stone Adhesive	11

THICK BED MORTARS & SCREEDS

3701 Mortar Admix + 226 Thick Bed Mortar	13
278 Mortar Admix 282 Mortar Admix	14
S/R Mortar	15

WALL FINISHES

Lataskim 418 Lataskim 419	17
-----------------------------	----

WATERPROOFING

Hydro Ban® Hydro Barrier™	19
Rayshield Heat Reflective	20
Vapex	21
Hydropel	22
Root Lock H2Opel	23

GROUT

NEW SPECTRALOCK® NS Grout	25-27
SPECTRALOCK® PRO Grout	28
SPECTRALOCK® DAZZLE™	29
1776 Grout Enhancer 1600 Unsanded Grout	30
Grout Color Selection	31

FLOOR AND STONE CARE

STONETECH® KlenzAll™	33
STONETECH® Restore™	34
STONETECH® Stone & Tile Cleaner STONETECH® Enhancer Pro™	35
STONETECH® BulletProof® STONETECH® Heavy Duty Sealer	36
STONETECH® Heavy Duty Exterior STONETECH® Impregnator Pro	37

COMPANY PROFILE

38-39

PROJECT HIGHLIGHTS

40-41



Burj Khalifa, a LATICRETE® project, is the tallest structure and building in the world since its topping out in late 2008.



ADHESIVES ADHESIVES & MORTARS & MORTARS

Choose LATICRETE® adhesives and mortars to ensure installations go faster, easier, and with predictable results time after time.

LATICRETE® adhesives and mortars have re-set the standard for industry performance. From high-strength construction epoxy adhesive to thinset or thick bed mortar, LATICRETE® adhesives are custom-formulated to deliver speed and efficiency on the entire range of applications.

305 TILE ADHESIVE

DRY SET ADHESIVE



317 MORTAR

POLYMER-MODIFIED THIN BED ADHESIVE



LATICRETE® 305 Tile Adhesive is a bagged cementitious powder to be mixed with water for installing ceramic tile and porcelain using the thin-set method of interior installation.

LATICRETE® 317 Mortar is a bagged cementitious powder, to be mixed with either water or latex admixture for installing ceramic tile and porcelain using the thin-set method of installation. Applicable also for exterior use, application with mosaic, or stone tiles, and/ or use in heavy traffic areas.

FEATURES/USES

- Dual-purpose — for walls and floors
- Easy to use — peanut butter consistency
- Consistent quality
- Proven performance
- Interior applications on floors and walls, over masonry, concrete, mortar beds, cement plaster

PACKAGING & COLOR

- 25 kg bag (Grey)

APPROXIMATE COVERAGE

7.4 to 8.8 m² with 6 mm x 6 mm square notch trowel.

*Coverage will vary depending on trowel notch size, type and size of tile and substrate.

STANDARDS / CERTIFICATIONS

- ANSI A118.1-1999
- EN12004

FEATURES/USES

- Dual-purpose — for walls and floors
- Smooth, easy-to-trowel formula
- Consistent quality
- Proven performance

PACKAGING & COLOR

- 25 kg (Grey / White)

APPROXIMATE COVERAGE

7.4 to 8.8 m² with 6 mm x 6 mm square notch trowel.

*Coverage will vary depending on trowel notch size, type and size of tile and substrate.

STANDARDS / CERTIFICATIONS

- ANSI A118.4 American National Standard Specifications for Dry-Set Cement Mortar
- BS EN 1346
- BS EN 1348



This product has been certified green under the UL GREENGUARD Certification Program and Singapore Green Building Council.

325 FLEX

PREMIUM TILE ADHESIVE



LATICRETE® 325 FLEX is a high-performance, polymer-modified, cementitious thin-set powder that is to be mixed only with water and applied using the thin-set method of installation. It is designed for interior and exterior, floor and wall installation of all types of ceramic tiles and natural stones over concrete and variety of substrates.

FEATURES/USES

- Bonds to most substrates
- Water- and heat-resistant
- Ready to use, just mix with water
- Long open time
- Strong bond and durable

PACKAGING & COLOR

- 25 kg (Grey / White)

APPROXIMATE COVERAGE

8.0 to 8.5 m² with 6 mm x 6 mm square notch trowel.

*Coverage will vary depending on trowel notch size, type and size of tile and substrate.

STANDARDS / CERTIFICATIONS

- ANSI A118.4 American National Standard Specifications for Dry-Set Cement Mortar
- BS EN 1346
- BS EN 1348
- BS EN 1308



This product has been certified green under the Singapore Green Building Council.

335 HIFLEX

FLEXIBLE CEMENTITIOUS TILE ADHESIVE



LATICRETE® 335 HIFLEX is a high-performance, polymer-modified, flexible cement-based adhesive that is to be mixed only with water using the thin-set method of installation. It is designed for interior and exterior; floor and wall installation of all types of ceramic tiles and natural stones over concrete and variety of substrates.

FEATURES/USES

- High adhesion
- Flexible
- Water- and heat-resistant
- Ready to use, just mix with water
- Long open time
- Strong bond and durable

PACKAGING & COLOR

- 25 kg (Grey / White)

APPROXIMATE COVERAGE

8.0 to 8.5 m² with 6 mm x 6 mm square notch trowel.

*Coverage will vary depending on trowel notch size, type and size of tile and substrate.

STANDARDS / CERTIFICATIONS

- ANSI A118.4 American National Standard Specifications for Dry-Set Cement Mortar
- BS EN 1346
- BS EN 1348
- BS EN 1308
- BS EN 12002



This product has been certified green under the Singapore Green Building Council.

254 PLATINUM

POLYMER-MODIFIED THIN BED ADHESIVE



The ultimate one-step, polymer-fortified, thin-set mortar for interior and exterior installation of ceramic tile, stone, quarry tile, pavers, and brick. 254 Platinum, designed to just mix with water, has a long open time with unsurpassed adhesion and workability. 254 Platinum is a LATICRETE® approved substitute for LATICRETE® 211 Powder mixed with LATICRETE® 4237 Latex Additive.

Excellent for exterior and underwater applications as well as providing superior bond to exterior-glue plywood (interior use only) and concrete. The ultimate thin-set for porcelain and glass tiles.

FEATURES/USES

- Exceeds ANSI A118.4 Shear Bond Strength Requirements and ANSI A118.11
 - Conforms to ISO 13007 with a classification of C2TES1P1
 - Ultimate adhesion for porcelain and glass tiles
 - Incredible bond to exterior-glue plywood and concrete*
 - Superior for exterior and submerged applications
 - High shear bond strength
 - Smooth and creamy formula
- * Refer to Technical Data Sheet for its limitations

PACKAGING & COLOR

- 25 kg (Grey / White)

APPROXIMATE COVERAGE

7.5 m² with 6mm x 6mm square notch trowel

*Coverage will vary depending on trowel notch size, type, and size of tile and substrate.

STANDARDS / CERTIFICATIONS



This product has been certified green under the UL GREENGUARD Certification Program

4237 THIN SET MORTAR ADDITIVE

THIN-SET ADDITIVE

211 CRETE FILLER POWDER

POLYMER-MODIFIED THIN BED ADHESIVE



LATICRETE® 4237 Thin Set Mortar Additive is a specially-designed latex additive for use with LATICRETE® 211 Crete Filler Powder, a factory-prepared blend of carefully selected raw materials, Portland cement, and graded aggregates. Combine these two to make a high-strength thin-set mortar bed (up to 3mm thick), or a medium mortar bed (up to 15 mm thick). For installing all types of ceramic tile, natural stone, mosaic, and agglomerate. LATICRETE® 4237 Thin Set Mortar Additive is also used with Portland cement to make slurry bond coats for mortar beds and with thin set mortars to give improved performance and longer open time.

FEATURES

- Superior bond strength: 250% greater than ANSI A118.4
- Flexible and shock-resistant; rated for extra-heavy traffic conditions
- Weather- and frost-resistant; for interior and exterior use in all types of climates
- Proven performance; used in all types of applications for over 60 years
- Safe, economical, and easy-to-use; non-hazardous, non-flammable
- Recommended for wet and dry areas
- Premixed — no jobsite blending of powders required
- Safe, economical, and easy to use; non-hazardous, non-flammable
- High-strength formula — meets and exceeds national and international standards
- Versatile — wet and dry areas, walls, floors, and ceilings
- Excellent for use in swimming pools, fountains, and water features

PACKAGING & COLOR

- 4237 Thin Set Mortar Additive: (20 L pail / 210 L drum)
- 211 Crete Filler Powder: 23 kg bag (Grey & White)

APPROXIMATE COVERAGE

23 kg bag of 211 Crete Filler Powder with 6.5 to 7.1 L of 4237 Thin-Set Mortar Additive will yield a coverage of 7.4 to 8.8 m² with 6 mm x 6 mm square notch trowel.

*Coverage will vary depending on trowel notch size, type and size of tile and substrate.

STANDARDS / CERTIFICATIONS

- ANSI A118.4 American National Standard Specifications for Dry-Set Cement Mortar
- BS EN 1346, BS EN 1348, BS EN 1308, BS EN 12002

This product has been certified green under the UL GREENGUARD Certification Program and Singapore Green Building Council.



LATAPOXY® 300 ADHESIVE

FULL BEDDING EPOXY ADHESIVE



LATAPOXY® 300 Adhesive is a chemical-resistant, epoxy adhesive that will bond to most stable, clean surfaces. This adhesive spreads easily and cleans with water while fresh. LATAPOXY® 300 Adhesive is a factory-proportioned kit consisting of epoxy resin, hardener, and chemical-resistant silica filler. LATAPOXY® 300 Adhesive can be used in interior and exterior (see Technical Data Sheet for its capacities) walls and floors, wet and dry areas.

FEATURES/USES

- Bonds to most substrates
- Water-cleanable
- No flammable solvents required to clean tools or finished work
- Ideal for installing moisture-sensitive marble and agglomerate tiles
- Ideal for the installation of resin-backed tile, mosaics, stone, and agglomerates
- Non-staining on white and light-colored marble
- High bond strength
- Maximum chemical resistance

For use in heavy-duty, commercial, and chemical-resistant installations in food-processing areas, commercial kitchens, restaurants, etc.

Note: The Tile Council of North America recommends the use of epoxy adhesives and grouts for thin-set installations on suspended concrete slabs and for floors and walls where chemical resistance is required.

PACKAGING & COLOR

- 11.3 kg set / full pail

APPROXIMATE COVERAGE

LATAPOXY® 300 Epoxy Adhesive can cover 30 to 35 sq. ft./2.8 to 3.3 m² with a 6 x 6 mm square notch trowel

STANDARDS / CERTIFICATIONS

- ANSI A118.3, American National Standard Specifications for Chemical Resistant, Water-Cleanable Tile-Setting and Grouting Epoxy Adhesive
- EN 1346
- EN 12003



This product has been certified green under the UL GREENGUARD Certification Program.

LATAPOXY® 310 STONE ADHESIVE

SPOT BONDING EPOXY ADHESIVE



LATAPOXY® 310 Stone Adhesive is a two-component, high-strength epoxy adhesive formulated for spot-bonding or fixing method of tile and stone installations on vertical surfaces. LATAPOXY® 310 Stone Adhesive maintains its non-sag consistency at high temperatures up to 35°C.

FEATURES/USES

- Bonds to most substrates
- Fast permanent bond
- Easy to use — 1:1 mixing ratio by volume
- Non-staining — ideal for white and light colored marbles, other stones, and tiles
- Withstands shock and vibration
- Durable, permanent bond will not deteriorate over time
- Safe — no solvents
- Non-sag even when applied up to 1" (25 mm) thick
- Approved by the following building code bodies for exterior installations: BOCA, ICBO, SBCCI, ICC
- Use for spot-bonding marble, granite, and large format ceramic tile on walls and overheads, interior or exterior, dry or wet applications
- Adhesive for bonding masonry, precast concrete, and stone panels
- Ideal for fireplace surroundings, elevators, and stair risers
- Adhesive for fabricating granite, marble, and other stone
- Adhesive for bedding and fastening marble, granite, and other stone slabs on walls and wainscoting

PACKAGING

FULL Unit: 10 kg set:

- 5 kg Part A pail
- 5 kg Part B pail

MINI Unit: 1 kg set:

- 500 g Part A pail
- 500 g Part B pail

APPROXIMATE COVERAGE

LATAPOXY® 310 Stone Adhesive can cover 20 to 21 m² of tile or stone surface area with a 10 kg set, and around 50 cm² with a 1 kg set, if only 10% of the total surface area using five equal spots with 3 mm thickness on a flat wall.

STANDARDS / CERTIFICATIONS

- ANSI A118.3, American National Standard Specifications for Chemical Resistant, Water -Cleanable, Tile-Setting and Grouting Epoxy Adhesive
- EN 13007-1



This product has been certified green under the UL GREENGUARD Certification Program.

THICK BED MORTARS THICK BED MORTARS & SCREEDS & SCREEDS

LATICRETE® has a variety of thick-bed mortars and screed products for use in interior and exterior installations in both residential and commercial applications. Choose from thick-bed mortars for the smallest of jobs, to pumpable mortar beds for large-scale veneer projects. Add 3701 Mortar Admix to all LATICRETE® thick-bed mortars for an economical and easy way to increase bond and compressive strength.

Thick-bed mortar products from LATICRETE® can also be used to create bonded, un-bonded, floating or heated screeds to bring the installation surface for the flooring to the design height, and provide a surface suitable for installing the specified flooring.



3701 MORTAR ADMIX

226 THICK BED MORTAR

THICK-BED MORTARS & SCREEDS



3701 Mortar Admix is a latex admixture that enhances cement mixes like thin-set mortars and cement grouts. It improves their properties and makes installations of ceramic tile, brick, and natural stone easier and more reliable.

226 Thick Bed Mortar is a pre-blended mixture of Portland cement, aggregates, and raw materials. It works together with 3701 Mortar Admix to create a strong latex Portland cement mortar.

FEATURES

- Interior and exterior installations
- Shock, chemical, and frost resistant
- Increased bond and compressive strength
- Water-resistant; suitable for submerged applications
- Superior flexibility
- "Extra Heavy Service" rating per TCNA performance levels (RE: ASTM C627 Robinson Floor Test)
- Premixed — no jobsite blending of powders required
- Safe — non-flammable; safe to store and mix
- Economical — saves time and money
- Easy to use — no special tools required
- Versatile — wet and dry areas, walls, floors, ceilings, interior and exterior
- High-strength Formula
- "Extra Heavy Service" rating per TCNA performance levels (RE: ASTM C627 Robinson Floor Test)

PACKAGING

- 20 L pail; 36 pails per pallet
- 27 kg bag; 56 bags per pallet

APPROXIMATE COVERAGE

27kg of 226 Thick Bed Mortar (floor screed) when mixed with - 2.7 L - 3.1 L of 3701 Mortar Admix/ Latex, yielding approximately 0.8 to 0.9m² at 20 mm thick.

STANDARDS / CERTIFICATIONS

(3701 Mortar Admix + 226 Thick BedMortar)

These products have been certified green under the UL GREENGUARD Certification Program.



278 MORTAR ADMIX THICK-BED MORTARS & SCREEDS



LATICRETE® 278 Mortar Admix is a special latex additive for tile grouts, thin-set mortars, and cement mortar beds. A simple and economical way to make permanent, problem free installation.

FEATURES/USES

- Cleans easily with water
- Safe, non-flammable, non-hazardous
- Used in place of water, LATICRETE® 278 Mortar Admix improves the working and physical properties of any cement mix and provides an economical and easy way to make permanent, trouble-free installations of ceramic tile, brick, and natural stone

PACKAGING & COLOR

- 278 Mortar Admix: (4 L Unit)

APPROXIMATE COVERAGE

- 4 L unit: covers approx. 0.64 m² at 20 mm thickness with LATICRETE® Thick Bed Mortar
- 20 L Pail: yields approx. 6.7 m² at 20 mm thickness with LATICRETE® Thick Bed Mortar

STANDARDS / CERTIFICATIONS

- ASTM C109
- BS 13892

282 MORTAR ADMIX THICK-BED MORTARS & SCREEDS



LATICRETE® 282 Mortar Admix is a special latex additive for tile grouts, thin-set mortars, and cement mortar beds. A simple and economical way to make permanent, problem-free installations.

FEATURES/USES

- Cleans easily with water
- Safe, non-flammable, non-hazardous
- Easy application
- Used in place of water, LATICRETE® 282 Mortar Admix improves the working and physical properties of any cement mix and provides an economical and easy way to make permanent, trouble-free installations of ceramic tile, brick, and natural stone

PACKAGING & COLOR

- 282 Mortar Admix: (20 L pail; 210 L drum)

APPROXIMATE COVERAGE

A 210 L drum of LATICRETE® 282 Mortar Admix will yield a coverage of about 67m² per 20 mm thick when mixed with LATICRETE® Thick Bed Mortar.

STANDARDS / CERTIFICATIONS

- ASTM C109
- ASTM C413
- ASTM C348
- BS 13892

This product has been certified green under the Singapore Green Building Council.



S/R MORTAR

THICK-BED MORTARS & SCREEDS



LATICRETE® S / R Mortar is a polymer-fortified blend of carefully selected polymers, Portland cement, and graded aggregates. LATICRETE® S / R Mortar does not require the use of latex admix; you only need to add water to produce a thick bed mortar with exceptional strength. It is especially intended for medium to thick screed or for improving the surfaces of concrete before tiling and levelling to specific ceiling height.

FEATURES/USES

- Polymer-fortified — no need for latex additives
- Premixed — no job site blending of powders required
- Economical — saves time and money
- Pumpable for large scale projects

PACKAGING & COLOR

- 40 kg bag

APPROXIMATE COVERAGE

A 40 kg bag will cover 22 to 25 m² at 1 mm thickness

STANDARDS / CERTIFICATIONS

- ASTM C109/109M:2013
- ASTM C348:2008
- BS EN1015-12:2000
- BS EN 13412:2006
- BS 4551:2005+A2:2003
- ASTM C413:2001(2012)
- Cuthiho ring
- ASTM C1437:2013
- BS EN 1015-9:1999(Method A)
- BS EN 1015-11:1999
- BS EN 1015-12:2000
- HDB's Test Method for Prepacked Mortar
- BS EN 1015-18:2002
- ASTM C531:2000(2012)
- ADM/C&B/001:2013
- ADM/C&B/002:2010

WALL FINISHES WALL FINISHES WALL FINISHES

LATICRETE® is a leading manufacturer of high-quality building materials, including wall finishes. LATICRETE® wall finishes are designed to provide a smooth, durable, and attractive finish for a wide range of interior and exterior wall surfaces.

LATICRETE® wall finishes offer a high-quality solution for anyone looking to finish interior or exterior walls. With their superior performance properties, aesthetic appeal, and versatility, Laticrete wall finishes are an excellent choice for any construction project.



LATASKIM 418

WALL FINISHES

LATASKIM 419

WALL FINISHES



LATICRETE® LATASKIM 418 is a high-quality, polymer-fortified cementitious skim coat with excellent water retention, adhesion, and workability properties.

LATICRETE® LATASKIM 419 is a high quality, polymer-fortified cementitious skim coat with excellent water retention, adhesion, and workability properties.

FEATURES/USES

- High bond and compressive strength
- Economical
- No primer required
- Interior installations

FEATURES/USES

- High bond and compressive strength
- Economical
- No primer required
- Versatile — one product for interior and exterior installations

PACKAGING & COLOR

- 20 kg bag
- White / Gray

PACKAGING & COLOR

- 20 kg bag
- White / Gray

APPROXIMATE COVERAGE

A 20 kg bag will cover 16 m² at 1 mm thickness

APPROXIMATE COVERAGE

A 20 kg bag will cover 16 m² at 1 mm thickness

STANDARDS / CERTIFICATIONS

- BS EN 1015-12
- BS EN 1015-11
- ASTM C531

STANDARDS / CERTIFICATIONS

- BS EN 1015-12
- BS EN 1015-11
- ASTM C531



WATERPROOFING **WATERPROOFING** WATERPROOFING

LATICRETE® waterproofing products provide protection for floors and walls for applications ranging from occasionally wet, to continuous water submersion as in showers or pools. Choose from liquid waterproofing membranes which can be applied for both waterproofing and as a crack isolation membrane / anti fracture, or waterproofing sheet membranes which allow for a quick, easy waterproof installation.

HYDRO BAN® WATERPROOFING MEMBRANE



LATICRETE® HYDRO BAN® Waterproofing Membrane is a thin, load-bearing waterproofing/crack isolation membrane. A single-component self-curing liquid rubber polymer that forms a flexible, seamless waterproofing membrane. LATICRETE® HYDRO BAN® bonds directly to a wide variety of substrates.

FEATURES/USES

- Bonds directly to metal and PVC plumbing fixtures
- Thin, only 0.5 mm to 0.8 mm thick when cured
- Equipped with anti-microbial technology
- Install tile, brick, and stone directly onto membrane

PACKAGING

- 3.8 L pail
- 20 L pail

APPROXIMATE COVERAGE

- A 20 L pail of LATICRETE® Hydro Ban® Waterproofing Membrane yields approximately 24 m² per 2 coats, while a 3.8 L pail of Hydro Ban® can cover approximately 4.56 m² per 2 coats.

STANDARDS / CERTIFICATIONS

- ASTM D412
- ASTM D4541
- ASTM C836
- ASTM D2240
- DIN 1048



This product has been certified green under the UL GREENGUARD Certification Program and Singapore Green Building Council.

HYDRO BARRIER™ WATERPROOFING MEMBRANE



LATICRETE® Hydro Barrier™ Waterproofing Membrane is a liquid-applied, self-curing liquid rubber polymer that can be easily applied to form a flexible, seamless, waterproofing anti-fracture membrane. LATICRETE® Hydro Barrier™ can be used on interior and exterior, horizontal or vertical surfaces, and is approved by IAPMO for use as shower pan liner.

FEATURES/USES

- Thin, only 0.5 to 0.8 mm thick when cured
- Lighter color for ease of inspection
- Safe—no solvents and non-flammable
- Install tile, brick, and stone directly onto membrane

PACKAGING

- 3.8 L pail
- 20 L pail

APPROXIMATE COVERAGE

- A 20 L pail of LATICRETE® Hydro Barrier™ Waterproofing Membrane yields approximately 24 m² per 2 coats, while a 3.8 L pail of Hydro Barrier™ can cover approximately 4.56 m² per 2 coats.

STANDARDS / CERTIFICATIONS

- ASTM D412
- ASTM D4541
- ASTM C836
- ASTM D2240
- DIN 1048



This product has been certified green under the Singapore Green Building Council.

RAYSHIELD HEAT REFLECTIVE WATERPROOFING MEMBRANE



LATICRETE® Rayshield Heat Reflective Waterproofing Membrane is a one-component, liquid-applied waterproofing membrane that provides excellent reflectance and elastomeric properties for exposed applications. Ideal for use on all new and old rooftops, terraces and balconies, floors, and walls.

FEATURES/USES

- Reduces heat transmission
- Able to accommodate movement and bridge cracks up to 3 mm
- Excellent resistance to ultraviolet rays
- Reduces dirt pick up
- Foot trafficable when cured
- High adhesion strength
- Interior and exterior

PACKAGING

- 3.8 L pail
- 20 L pail

APPROXIMATE COVERAGE

- A 20 L pail of LATICRETE® Rayshield Heat Reflective Waterproofing Membrane yields approximately 24 m² per 2 coats, while a 3.8 L pail of Rayshield Heat Reflective Waterproofing Membrane can cover approximately 4.56 m² per 2 coats.

STANDARDS / CERTIFICATIONS

- ASTM D2370
- ASTM E96
- ASTM D2240
- ASTM E154
- ASTM C836
- ASTM G154



This product has been certified green under the Singapore Green Building Council.

VAPEX WATERPROOFING MEMBRANE



LATICRETE® Vapex Membrane is a versatile and easy-to-use, exposed waterproofing membrane that provides excellent flexibility and protection of substrates from water penetration and ultra violet rays. Ideal for use on all rooftops, terraces and balconies, floors, and walls.

FEATURES/USES

- Easy to install—applies like paint
- Protects substrates from water damage
- Excellent resistance in high and low temperatures
- Excellent adhesion on substrates even without use of primer
- Able to bridge cracks up to 3 mm
- Interior and exterior
- Rooftops and roof terraces
- Balconies
- Over existing metal roofs

PACKAGING

- 3.8 L pail
- 20 L pail

APPROXIMATE COVERAGE

- A 20 L pail of LATICRETE® Vapex Waterproofing Membrane yields approximately 24 m² per 2 coats, while a 3.8 L pail of Vapex Waterproofing Membrane can cover approximately 4.56 m² per 2 coats.

STANDARDS / CERTIFICATIONS

- ASTM D2370
- ASTM D2240
- ASTM C836
- ASTM E96
- ASTM E154
- ASTM G154

HYDROPEL WATERPROOFING MEMBRANE



LATICRETE® Hydropel Waterproofing Membrane is a two-component, cementitious, seamless, polymer-modified waterproofing membrane that cures to form a tough and flexible membrane to protect all concrete and masonry surfaces against the ingress of water and moisture.

FEATURES/USES

- No primer required on the substrate before application
- Can be applied on damp—not moist—substrates
- Non-toxic, ideal for potable water uses
- Install tile, brick, and stone directly onto membrane
- Safe—no solvents and non-flammable
- Excellent bond on the substrates and good adhesion under water impact
- Smooth and creamy
- Easy to apply
- Good climate resistance
- Recommended for wall and floor in wet areas such as toilets, bathrooms, and kitchens
- For cellar walls
- Balconies and terraces
- Sewers
- Grain silos
- Surface protection for structural concrete (as protection against CO₂, chlorides, sulphate, and humidity)

PACKAGING

- 1 set (36 kg / set) consists of:
1 bag of powder (22 kg)
1 pail of liquid (14 L)

APPROXIMATE COVERAGE

- A 36 kg set of LATICRETE® Hydropel Waterproofing Membrane can yield approximately 32.3 m² with 2 coats.

STANDARDS / CERTIFICATIONS

- ANSI A118.10, American National Standard Specifications for Load-Bearing, Bonded, Waterproof Membranes for Thin-set Ceramic Tile and Dimension Stone Installation
- ASTM D412
- ASTM D4541
- ASTM D2240
- ASTM C836



This product has been certified green under the Singapore Green Building Council.

ROOTLOCK WATERPROOFING MEMBRANE



LATICRETE® Root Lock Membrane is a one-component, strong, and durable liquid-applied waterproofing membrane that cures into a flexible, high-adhesion membrane, which provides a green solution for planter and landscaping applications. It contains special fillers to prevent roots from puncturing through the membrane.

FEATURES/USES

- Excellent resistance in high and low temperatures
- Excellent adhesion on substrates even without use of primer
- Resistance to puncturing, tearing, and wearing
- Double usage as a waterproofing and root resistance membrane
- Interior and exterior
- Swimming pools, fountains, and water features
- Spas and hot tubs
- Planter boxes

PACKAGING

- 20 L pail

APPROXIMATE COVERAGE

A 20 L pail of LATICRETE® Root Lock Membrane yields approximately 24 m² per 2 coats.

STANDARDS / CERTIFICATIONS

- ASTM D2240
- ASTM C836
- ASTM D412
- ASTM E96/E96M
- DIN 4062

This product has been certified green under the Singapore Green Building Council.



H2OPEL WATERPROOFING MEMBRANE



LATICRETE® H2OPEL Waterproofing Membrane is a two-component, flexible, polymer-modified membrane designed to protect substrates like concrete and masonry from the ingress of water vapor or moisture.

FEATURES/USES

- No primer required on the substrate before application
- Can be applied on damp — not moist — substrates
- Non-toxic, ideal for potable water uses
- Install tile, brick, and stone directly onto membrane
- Smooth and creamy; easy to apply
- Good climate resistance
- Recommended for wall and floor in wet areas such as toilets, bathrooms, and kitchens

PACKAGING


- 1 set (3.8 kg / set) consists of: 2.1 kg of powder, 1.7 L liquid
- 1 set (36 kg / set) consists of: 1 bag of powder (22 kg), 1 pail of liquid (14 L)

APPROXIMATE COVERAGE

- A 36 kg set of LATICRETE® H2OPEL Waterproofing Membrane can yield approximately 32.3 m² with 2 coats, while a 3.8 kg set can cover approximately 3.4 m² with 2 coats.

STANDARDS / CERTIFICATIONS

- ASTM C836
- ASTM D4541
- ASTM D2240
- ASTM D412

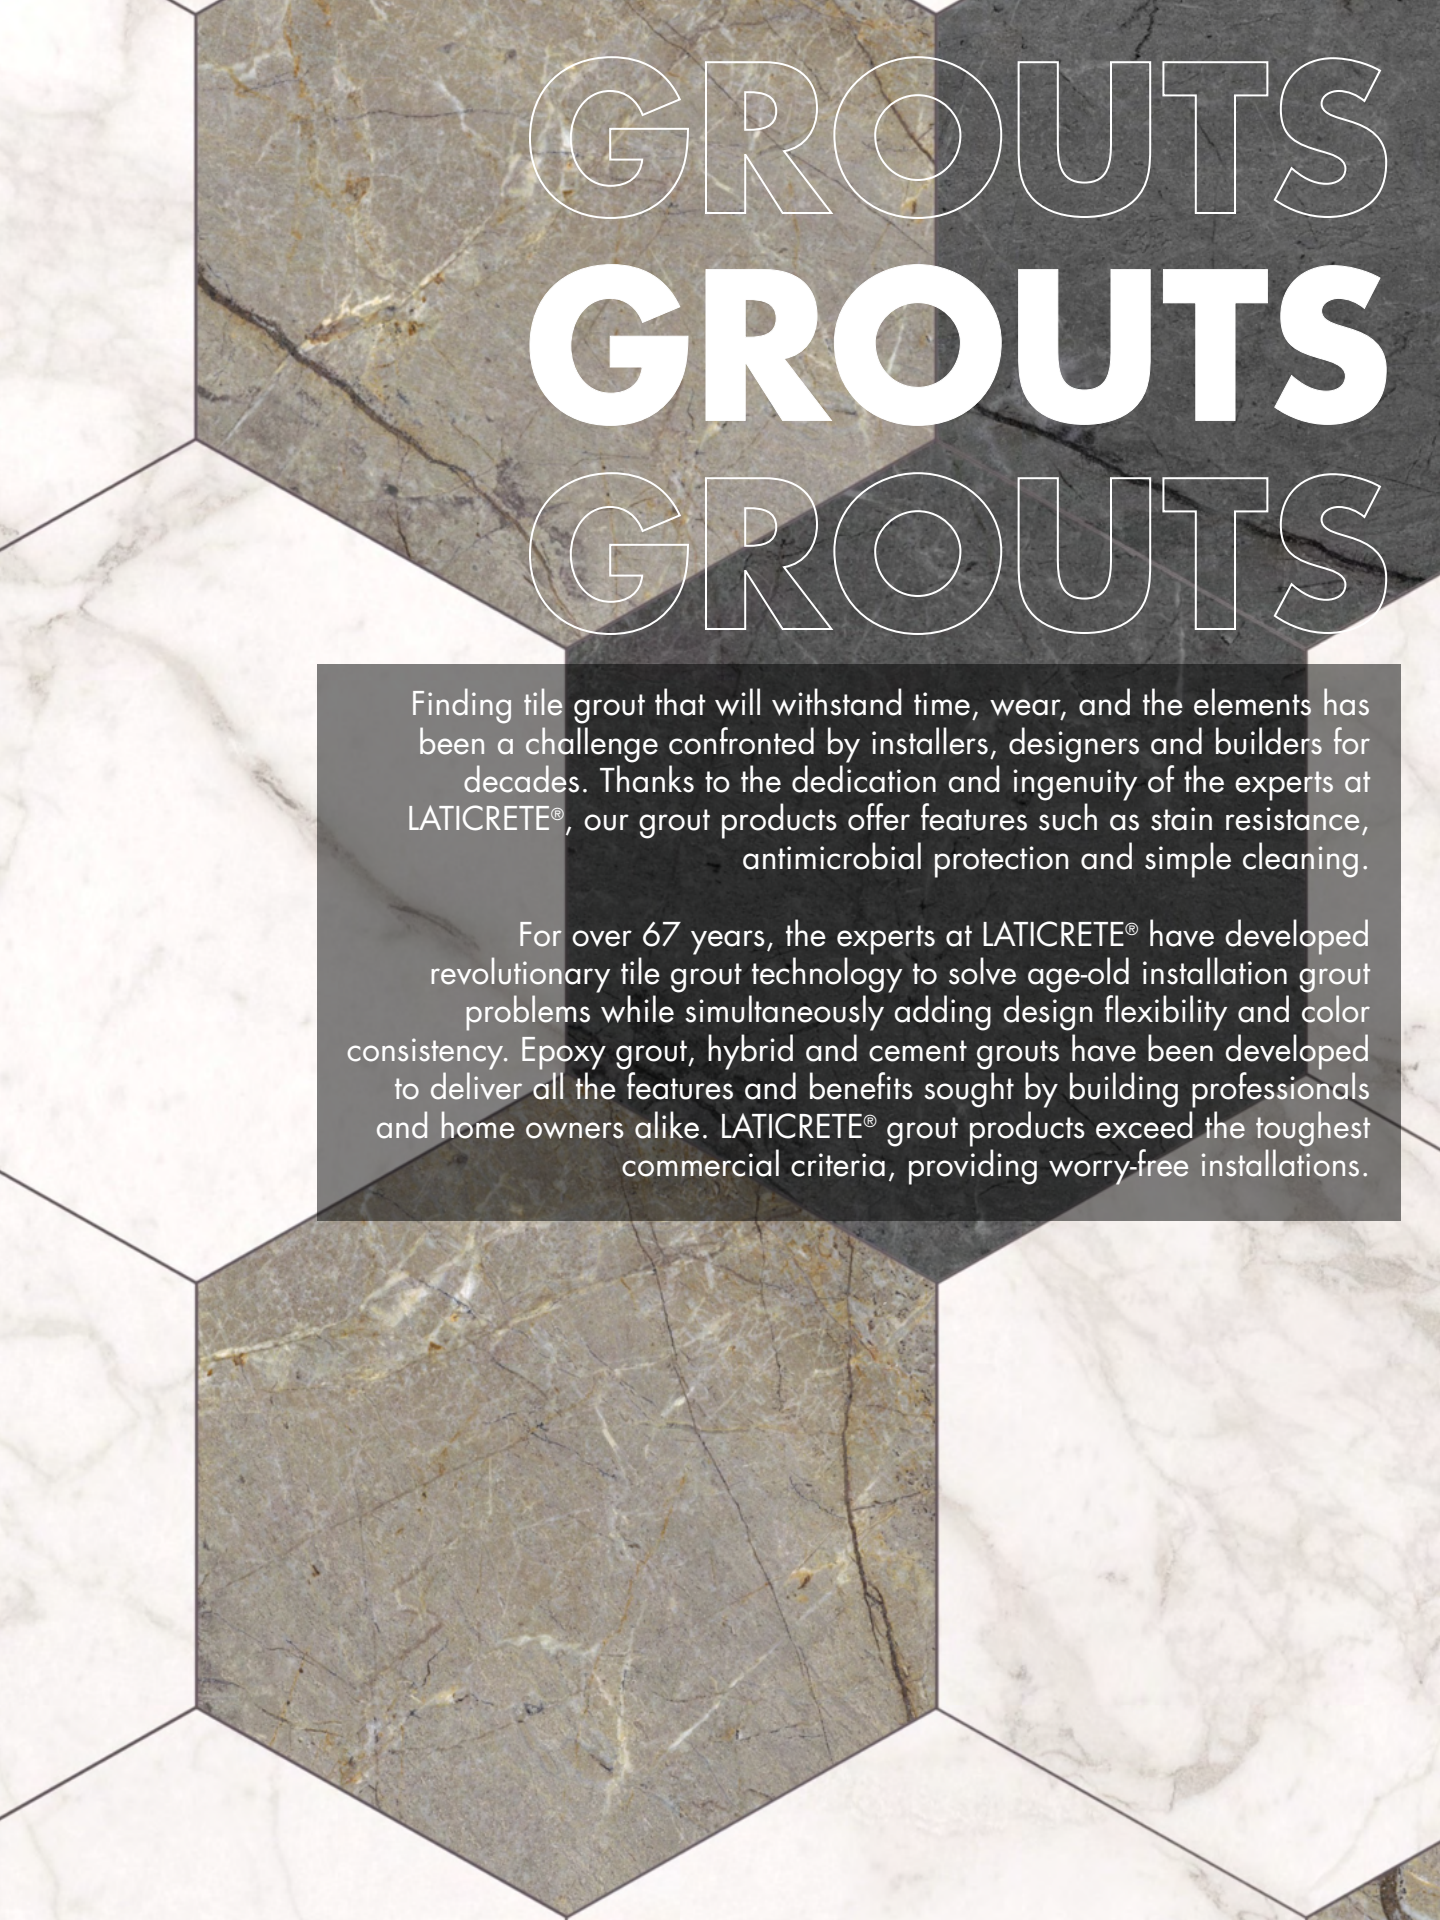

GROUTS GROUTS GROUTS

Finding tile grout that will withstand time, wear, and the elements has been a challenge confronted by installers, designers and builders for decades. Thanks to the dedication and ingenuity of the experts at LATICRETE®, our grout products offer features such as stain resistance, antimicrobial protection and simple cleaning.

For over 67 years, the experts at LATICRETE® have developed revolutionary tile grout technology to solve age-old installation grout problems while simultaneously adding design flexibility and color consistency. Epoxy grout, hybrid and cement grouts have been developed to deliver all the features and benefits sought by building professionals and home owners alike. LATICRETE® grout products exceed the toughest commercial criteria, providing worry-free installations.



SPECTRALOCK® NS GROUT

STAINPROOF EPOXY GROUT

PROTECTION THAT LIVES ON
MICROBAN®



StainProof Grout^^



Strong and Durable



Anti-Bacterial
and Anti-Fungal



Easy to Install &
Easy to Clean!

^^StainProof (residential installation only) to common household cleaners, liquids and other goods. Clean all spills immediately.

SPECTRALOCK® NS GROUT

EPOXY GROUT

SPECTRALOCK® NS Grout is a stainproof, durable, chemical resistant, 100% solid epoxy grout for ceramic tile, porcelain tile, marble and stone. SPECTRALOCK® NS Grout is enhanced with Microban® antimicrobial technology providing around-the-clock protection from the growth of microbes including bacteria, mold and mildew.

FEATURES/USES

- Meets performance requirements of ANSI A118.3-1999
- Inhibits the growth of stain-causing mold and mildew in the grout joints with antimicrobial product protection
- Ideal for installations at wide temperature ranges
- Uniform color—no blotchiness or shading
- Easy to maintain, cleanable to the original color
- Chemical resistant
- Stain-resistant
- Tough, durable, and crack-resistant
- Outperforms cement-based grout
- Non-sag formula for walls and floors
- Can be made high-fashion with the addition of Dazzle™ component

PACKAGING

2KG SET

- SPECTRALOCK® NS Grout Part A (0.3 kg)
- SPECTRALOCK® NS Grout Part B (0.3 kg)
- SPECTRALOCK® NS Grout Part C (2 kg)

APPROXIMATE COVERAGE

Tile Size (mm)			Grout Joint Size (mm)							
Width	Length	Thickness	1.5 mm	3 mm	4.5 mm	6 mm	7.5 mm	9 mm	10.5 mm	12 mm
25	25	6	15.5	8.0	5.5	4.3	3.5	3.0	2.7	2.5
50	50	6	30.5	15.5	10.5	8.0	6.5	5.5	4.8	4.3
100	100	12	30.2	15.2	10.2	7.7	6.2	5.2	4.5	4.0
100	200	12	40.2	20.2	13.5	10.2	8.2	6.9	5.9	5.2
115	240	10	56.2	28.2	18.9	14.2	11.4	9.6	8.2	7.2
150	150	9	60.3	30.3	20.3	15.3	12.3	10.3	8.9	7.8
200	200	9	80.3	40.3	27.0	20.3	16.3	13.6	11.7	10.3
300	300	9	120.3	60.3	40.3	30.3	24.3	20.3	17.4	15.3
300	300	12	90.2	45.2	30.2	22.7	18.2	15.2	13.1	11.5
325	325	9	130.3	65.3	43.6	32.8	26.3	22.0	18.9	16.6
400	400	9	160.3	80.3	53.6	40.3	32.3	27.0	23.2	20.3
450	450	9	180.3	90.3	60.3	45.3	36.3	30.3	26.0	22.8
600	600	9	240.3	120.3	80.3	60.3	48.3	40.3	34.6	30.3

Add 10% for waste, spillage and clean-up, and another 10%–15% when grouting unglazed quarry tile.

STANDARDS / CERTIFICATIONS

- ANSI A118.3, American National Standard Specifications for Chemical-Resistant, Water-Cleanable, Tile-Setting and Grouting Epoxy Adhesive tested on SPECTRALOCK® PRO Grout 1244 Bright White
- ISO 13007-3
- BS EN 13888

SPECTRALOCK® NS GROUT

EPOXY GROUT




Grout Colour Guidelines: Grout colour samples are guides only. LATICRETE does not warrant colour matching to this colour chart or to any colour guide produced. Actual shade and texture will depend on job site conditions, lighting, installation techniques and types/colour of tile or stone used, and may vary from this grout colour chart, grout colour channel kits and grout colour swatch on product packaging. Verify actual appearance and compatibility with a test area before installing. No claims for colour shade variations will be honoured.

NOTE: Grout color availability subject to change.

SPECTRALOCK® PRO GROUT

EPOXY GROUT

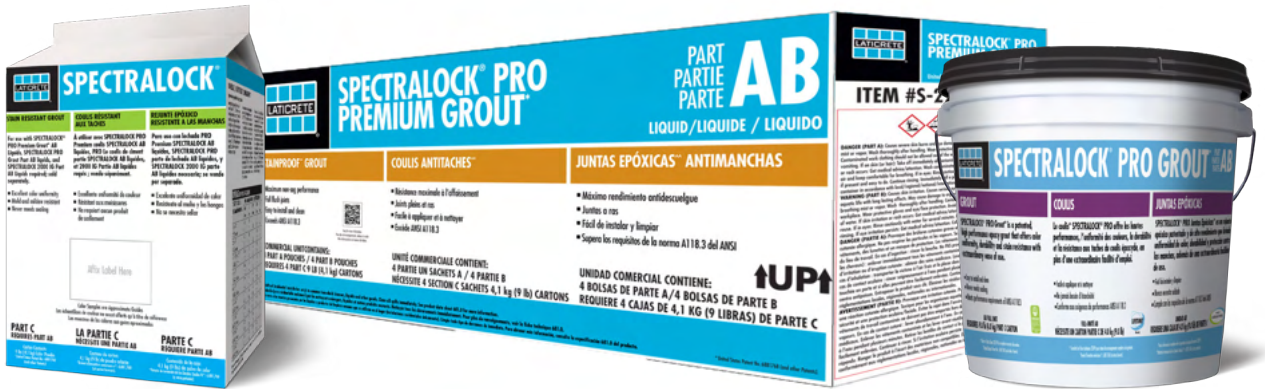

SPECTRALOCK® PRO Grout is designed for use on ceramic tile, glass tile, and stone applications, both residential and commercial. It can be used both interior and exterior on floors and walls. Ideal for re-grouting applications, SPECTRALOCK® PRO Grout is perfect for swimming pools, fountains, and other wet area applications.

FEATURES/USES

- Meets performance requirements of ANSI A118.3
- Inhibits the growth of stain-causing mold and mildew in the grout joints with antimicrobial product protection
- Ideal for installations at wide temperature ranges
- Uniform color—no blotchiness or shading
- Easy to maintain, cleanable to the original color
- Stain-resistant
- Tough, durable, and crack-resistant
- Outperforms cement-based grout
- Non-sag formula for walls and floors
- Can be made high-fashion with the addition of Dazzle™ component

PACKAGING

FULL UNIT

- SPECTRALOCK® Pro Grout Part A (1 x 0.54 kg)
- SPECTRALOCK® Pro Grout Part B (1 x 0.54 kg)
- SPECTRALOCK® Pro Grout Part C (1 x 4.1 kg)

COMMERCIAL UNIT

- SPECTRALOCK® Pro Grout Part A (4 x 0.54 kg)
- SPECTRALOCK® Pro Grout Part B (4 x 0.54 kg)
- SPECTRALOCK® Pro Grout Part C (4 x 4.1 kg)

APPROXIMATE COVERAGE

TILE SIZE	JOINT WIDTH		
	1/16" (1.5 mm)	1/8" (3 mm)	1/4" (6 mm)
1 x 1 x 1/4" (25 x 25 x 6 mm)	4.2 m ²	2.1 m ²	1.1 m ²
12 x 12 x 3/8" (300 x 300 x 9 mm)	32.3 m ²	16.2 m ²	8.1 m ²
15 x 15 x 3/8" (400 x 400 x 9 mm)	43.3 m ²	21.7 m ²	11 m ²
24 x 24 x 1/2" (600 x 600 x 12 mm)	48.6 m ²	24.4 m ²	12.3 m ²

Add 10% for waste, spillage and clean-up, and another 10%–15% when grouting unglazed quarry tile.

STANDARDS / CERTIFICATIONS

- ANSI A118.3, American National Standard Specifications for Chemical-Resistant, Water-Cleanable, Tile-Setting and Grouting Epoxy Adhesive tested on SPECTRALOCK® PRO Grout 1244 Bright White



SPECTRALOCK® DAZZLE™ EPOXY GROUT COMPONENT



A unique design component, SPECTRALOCK® DAZZLE™ adds metallic and "Glow-In-The-Dark" enhancements to SPECTRALOCK® PRO Grout. These high-end design elements offer limitless imaginative applications. Use SPECTRALOCK® DAZZLE™ on walls and floors. Add a metallic look to plain tile and stone. Accentuate metallic tiles, glass tiles, mosaics, stone, and listellos with Dazzling color combinations. Use SPECTRALOCK® DAZZLE™ in your pools and spas. Use Glow in your bathrooms, hallways, and entryways. For use in interior and exterior applications, on both floors and walls.

FEATURES/USES

- Available in both metallic and glow-in-the-dark varieties
- For interior and exterior use
- Improved non-sag formula
- Stainproof^{^^}
- Never needs sealing
- Ease of maintenance
- Vibrant, consistent color
- Will not fade or deteriorate — integrally mixed


^{^^}StainProof (residential installation only) to common household cleaners, liquids, and other goods. Clean all spills immediately.

PACKAGING & COLOR

- 8.5 oz. jar

STANDARDS / CERTIFICATIONS

This product has been certified green under the UL GREENGUARD Certification Program.

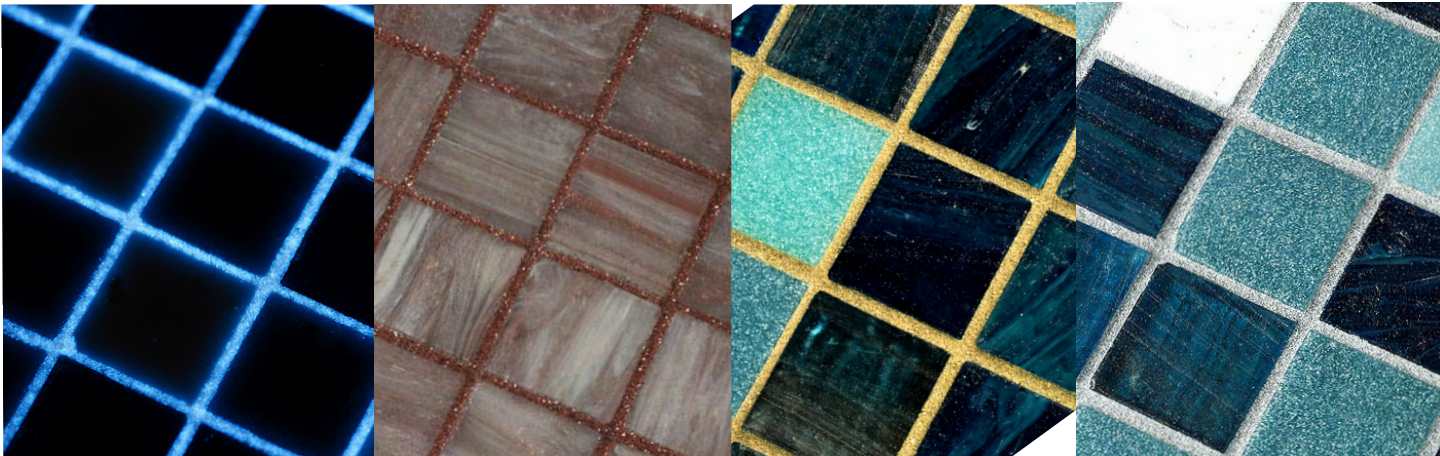

1776 GROUT ENHANCER CEMENTITIOUS GROUT



Designed for use with 1600 Unsanded Grout, 1776 Grout Enhancer is used in place of water to provide a dense, colorfast grout joint that inhibits stain-causing bacteria, mold, and mildew growth. Ideal for all interior and exterior grout applications.

FEATURES/USES

- Equipped with anti-microbial technology
- Easy to clean — cleans easily using a minimal amount of water
- Inhibits powdering and cracking — provides a denser and stronger Portland cement grout joint
- Locks in grout color — reduces problems with faded or blotchy color in grouts
- Water- and frost-resistant — prevents damage to grouts from weathering, frost, and thermal shock
- Reduces staining
- Reduces moisture absorption
- Designed for interior and exterior use
- “Extra Heavy Service” rating per TCNA performance levels (RE: ASTM C627 Robinson Floor Test)
- Improves flexibility and durability — makes grout more shock-resistant

PACKAGING & COLOR

- 5 gal (19 L) pail

STANDARDS / CERTIFICATIONS

- ANSI A118.7



This product has been certified green under the UL GREENGUARD Certification Program.

1600 UNSANDED GROUT CEMENTITIOUS GROUT



A premium, factory-prepared, polymer-fortified unsanded Portland cement grout designed to be mixed with water. Formulated from a blend of high-strength Portland cement, graded aggregates, polymers, and color-fast pigments. Provides a grout joint that is dense, hard, and durable.

FEATURES/USES

- Mix with water; or, for improved performance, fortify with LATICRETE® 1776 Grout Enhancer
- Excellent for wet and dry areas
- Non-dusting, non-spalling, and non-yellowing
- Non-shrinking
- Easy application and clean-up
- Available in a range of exciting, non-fading colors for interior and exterior use

PACKAGING & COLOR

- 20 kg bag / 2 kg pouch (Up to 40 colors available. Refer to color chart)

APPROXIMATE COVERAGE

Actual coverage will vary depending on job site conditions, actual tile size, and grout joint size. Add 10% for waste, spillage, and clean-up, and another 10% to 15% when grouting unglazed quarry tile.

STANDARDS / CERTIFICATIONS

- BS EN 12808



This product has been certified green under the UL GREENGUARD Certification Program.

GROUT COLOR SELECTION

SPECTRALOCK® PRO & 1600 UNSANDED GROUT

95 Mink NEW

SL 1600

97 Iron NEW

SL 1600

44 Bright White

SL 1600

18 Sauterne

SL 1600

16 Siltstone

SL 1600

90 Light Pewter

SL 1600

85 Almond

SL 1600

03 Silk

SL 1600

23 Antique White

SL 1600

39 Mushroom

SL 1600

41 Kashmir

SL 1600

81 Butter Cream

SL 1600

52 Toasted Almond

SL 1600

55 Tawny

SL 1600

17 Marble Beige

SL 1600

40 Latte

SL 1600

61 Parchment

SL 1600

30 Sand Beige

SL 1600

56 Desert Khaki

SL 1600

38 River Rock

SL 1600

27 Hemp

SL 1600

57 Hot Cocoa

SL 1600

92 Saltillo

SL 1600

58 Terra Cotta

SL 1600

46 Quarry Red

SL 1600

43 Chocolate Truffle

SL 1600

66 Chestnut Brown

SL 1600

59 Espresso

SL 1600

35 Mocha

SL 1600

67 Autumn Green

SL 1600

50 Sea Glass

SL 1600

53 Twilight Blue

SL 1600

42 Platinum

SL 1600

91 Slate Grey

SL 1600

88 Silver Shadow

SL 1600

89 Smoke Grey

SL 1600

78 Sterling Silver

SL 1600

24 Natural Grey

SL 1600

34 Sandstone

SL 1600

60 Dusty Grey

SL 1600

45 Raven

SL 1600

22 Midnight Black

SL 1600

SL

SPECTRALOCK® PRO
GROUT

1600

1600 UNSANDED
GROUT

Grout Colour Guidelines: Grout colour samples are guides only. LATICRETE does not warrant colour matching to this colour chart or to any colour guide produced. Actual shade and texture will depend on job site conditions, lighting, installation techniques and types/colour of tile or stone used, and may vary from this grout colour chart, grout colour channel kits and grout colour swatch on product packaging. Verify actual appearance and compatibility with a test area before installing. No claims for colour shade variations will be honoured.

NOTE: Grout color availability subject to change.

FLOOR & STONE CARE

FLOOR & STONE CARE

FLOOR & STONE CARE

LATICRETE® offers a professional and retail line of care and maintenance products for tile, natural stone, grout, and masonry surfaces.

Whether it's natural stone, tile, grout, or other material, if your surface has some porosity, it can stain with water, oil, and food-based liquids. Each line provides unique natural-look sealers, enhancing sealers, and specialized cleaners. Natural-look sealers protect but do not alter your surface. All-in-one enhancing sealers darken and/or add a desired shine while protecting the surface. Specialized cleaners in a range of daily, and heavy-duty cleaning solutions can help to remove stains without damaging the surface.

Clean



Transform



Protect



STONETECH® KLENZALL™ CLEANER

FLOOR & STONE CARE



STONETECH® KlenzAll™ Cleaner is the heavy duty strength, alkaline cleaner made to remove the toughest dirt, grease and grime from natural stone, tile, masonry and grout. It cleans, degreases and prepares the surface for resealing, is safe on stone and is low VOC. Available in ready-to-use and concentrate formulas for use on heavily used areas such as countertops, walls or floors.

FEATURES/USES

- Powers through stubborn grease and soils
- Safe on stone, will not etch
- Prepares surface for resealing
- Water-based alkaline formula
- Ready-to-use or concentrate formulas
- Countertops
- Backsplashes
- Floors
- Walls

PACKAGING

- Available in 1 L and 3.8 L unit (Concentrate)

RECOMMENDED SURFACES

Natural stone, masonry, tile and grout surfaces such as:

- Marble
- Granite
- Quartzite
- Limestone
- Travertine
- Slate
- Sandstone
- Flagstone
- Masonry
- Concrete
- Ceramic Tile
- Porcelain tile



STONETECH® RESTORE™ ACIDIC CLEANER

FLOOR & STONE CARE



STONETECH® Restore™ Acidic Cleaner is the heavy duty, acidic cleaner that removes dirt, hard water deposits, efflorescence and rust from tile and acid resistant stone, masonry and grout. It quickly renews the surface to a like-new appearance. This no VOC, concentrated cleaner can be diluted to light, medium and heavy duty use and also cleans tough soap scum and light grout haze. Great for use in heavy traffic areas.

FEATURES/USES

- Removes hard water deposits, grout haze, efflorescence, and soap scum
- Professional strength
- Concentrate formula
- Heavy Duty Cleaner for tile and acid resistant stone, masonry and grout
- Removes dirt and rust
- Renews the look of the surface
- Water-based, acidic formula
- No VOC - Better indoor air quality
- Countertops
- Backsplashes
- Floors
- Walls

PACKAGING

- Available in 1 L unit (Concentrate)

STONETECH® STONE & TILE CLEANER

FLOOR & STONE CARE



STONETECH® Stone & Tile Cleaner is formulated to remove tough everyday spills, dirt and grease on natural stone, tile, masonry, and grout. This stone & tile cleaner is unlike other household cleaners that are highly acidic and abrasive and can damage your valuable surfaces.

FEATURES/USES

- Daily Stone & Tile Cleaner - cleans everyday messes
- Neutral pH formula - gently cleans without degrading natural stone, tile and grout
- Leaves a clean fresh scent
- Better in door air quality
- Countertops
- Backsplashes
- Floors
- Walls
- Interior and exterior

PACKAGING

- Available in 1 L unit (Concentrate)

STONETECH® ENHANCER PRO SEALER

FLOOR & STONE CARE



STONETECH® Enhancer Pro™ Sealer is the color enhancing, penetrating sealer that provides maximum color & stain protection on natural stone, masonry and grout. It deepens the natural rich color of porous surfaces without altering the finish and penetrates deep to protect it from staining.

FEATURES/USES

- Deepens color of porous natural stone, masonry and grout
- Maximum stain protection - no gloss
- For interior and exterior use
- Weather & UV resistant
- Solvent-based formula
- Professional grade
- Countertops
- Backsplashes
- Floors
- Walls

PACKAGING

- Available in 1 L unit

APPROXIMATE COVERAGE

- Up to 22.1 m²/1 L for a single coat application.

STONETECH® BULLETPROOF® SEALER

FLOOR & STONE CARE



STONETECH® BulletProof® Sealer is a water-based penetrating sealer that provides maximum stain while preserving the natural look of the surface. It can be used as a grout sealer, tile sealer, masonry sealer and in many other applications. This premium sealer offers the best protection on the most porous natural stone, tile, masonry and grout surfaces in interior and exterior applications.

FEATURES/USES

- Offers maximum stain protection
- Continuously inhibits the growth of bacteria, mold and mildew on the sealed surface.
- Best sealer for the most porous natural stone, tile, masonry & grout
- Preserves the original look of the surface and is breathable
- Water-based formula - Better for you and the environment
- Low odor, non-flammable and weather resistant - For interior and exterior use
- Professional grade
- Countertops
- Backsplashes
- Floors
- Walls

PACKAGING

- Available in 1 L unit

APPROXIMATE COVERAGE

- Up to 22.1 m² /1 L for a single coat application.

STONETECH® HEAVY DUTY SEALER

FLOOR & STONE CARE



STONETECH® Heavy Duty sealer is a water-based penetrating sealer that provides advanced stain and antimicrobial product protection, while preserving the natural look of the surface. It protects against oil and water-based stains on natural stone, tile, masonry, and grout in interior and exterior applications. It's great for use as a granite sealer, tile sealer and more.

FEATURES/USES

- Offers advanced stain protection
- Preserves the original look of the surface and is breathable
- Water-based formula - Better for you and the environment
- Low odor, non-flammable and weather resistant - For interior and exterior use
- Professional grade
- Countertops
- Backsplashes
- Floors
- Walls

PACKAGING

- Available in 1 L unit

APPROXIMATE COVERAGE

- Up to 22.1 m² /1 L for a single coat application.

STONETECH® HEAVY DUTY EXTERIOR SEALER
FLOOR & STONE CARE

STONETECH® IMPREGNATOR PRO SEALER
FLOOR & STONE CARE



STONETECH® Heavy Duty Exterior Sealer is a solvent based, penetrating sealer which offers advanced stain protection and weather resistance on natural stone, masonry and grout surfaces. Designed specifically to meet the challenges of exterior applications, STONETECH® Heavy Duty Exterior Sealer minimizes efflorescence and repels water.

STONETECH® Impregnator Pro Sealer is a solvent based, penetrating sealer that provides advanced stain protection on natural stone, tile, masonry and grout surfaces. It blocks out oil and water based stains by impregnating into the surface without changing the original look or finish. Effective in interior and exterior application

FEATURES/USES

- Protects natural stone, masonry and grout
- Minimizes efflorescence and repels water
- Provides weather resistance
- Solvent-based formula
- For exterior use
- Countertops
- Backsplashes
- Floors
- Walls
- Walkways
- Patios

FEATURES/USES

- Offers advanced stain protection
- Protects natural stone, tile, masonry and grout
- Preserves the original look of the surface
- Solvent-based formula
- For interior and exterior use
- Professional grade
- Countertops
- Backsplashes
- Floors
- Walls

PACKAGING

- Available in 1 L unit

PACKAGING

- Available in 1 L unit

APPROXIMATE COVERAGE

- Up to 24.65 m² /1 L depending on porosity of stone

APPROXIMATE COVERAGE

- Up to 24.6 m² /1 L depending on porosity of stone

LATICRETE PHI

LATICRETE PHI

LATICRETE® is a worldwide manufacturer of tile and stone installation systems. The company was founded in 1956 by **Dr. Henry M. Rothberg** and **Lillian R. Rothberg**. With a tile setting background and a chemical engineering degree, Dr. Rothberg was determined to bring improvements to centuries old portland cement based tile and stone installation products. Dr. Rothberg's work in this area is the basis for all modern tile and stone adhesives.



Dr. Henry M. Rothberg & Family

For over 67 years, **LATICRETE®** has provided the technology, products and experience to make innovative, permanent installations and repairs for the construction market. Architecturally specified and professionally endorsed by installers, **LATICRETE®** offers a dedication to quality that results in globally proven solutions for virtually every application. By heavily reinvesting our earnings into continuous research, customer support, and improving our manufacturing capabilities, we continue to build long term value despite fluctuations in construction activity and evolving market needs.



LATICRETE International, Inc. Bethany, Connecticut, USA

LIPPINES, INC.

LIPPINES, INC.

The commitment of our owners to provide robust client service is unwavering and reflected throughout our organization. In addition to developing products which support GREEN efforts, **LATICRETE®** offers a wide array of certified low VOC (volatile organic compounds) installation materials, independently tested and certified by the GREENGUARD Environmental Institute, contributing to LEED certification.

With approximately 650 associates worldwide, **LATICRETE®** operates 7 plants in the United States, as well as facilities in UAE, China, India, Singapore, Australia, Norway, Italy, Costa Rica to name a few, and now, the first manufacturing plant in Santa Maria, Bulacan is ready to cater the diverse market in the Philippines.

LATICRETE® Philippines, Inc. was formed on March 2015 with the primary purpose of continuing and extending the manufacturing and marketing of globally proven construction solution products that can help address different construction challenges here in the Philippines.

The company is established with following principles in mind: To efficiently utilize our country's limited local resources in the manufacturing of products; To ensure that our products are developed with quality for long-lasting use to minimize waste and impact on local resources and the environment; To ensure the effective use of materials and cut down on the consumption of water and energy resources.



LATICRETE Philippines, Inc. Santa Maria, Bulacan, Philippines





PROJECT HIGHLIGHTS


PROJECT NAME	LOCATION	LATICRETE PRODUCTS USED
Arya Residences	Taguig City	LATICRETE Unsanded Grout 1600, LATICRETE Flexible Tile Adhesive 335, LATICRETE Latex Additive 4237 + LATICRETE Crete Filler Powder 211
Ascott Residences	Taguig City	LATICRETE Thinset 317, LATICRETE 1600 Unsanded Grout, LATICRETE 282 Mortar Admix
Aspire Tower	Quezon City	LATICRETE Thinset 316, LATICRETE Unsanded Grout 1600
BDO Tower	Mandaluyong City	LATICRETE Unsanded Grout 1600, LATICRETE Flexible Tile Adhesive 325
City of Dreams	Paranaque City	LATICRETE Flexible Tile Adhesive 335, LATICRETE Latex Additive 4237 + LATICRETE Crete Filler Powder 211, LATICRETE Hydro Ban, LATAPOXY 300 Adhesive, SPECTRALOCK Pro Grout
Discovery Primea	Makati City	LATICRETE Flexible Tile Adhesive 335, LATAPOXY 310, LATICRETE 1600 Unsanded Grout
East Gallery Tower One	BGC, Taguig City	LATICRETE 317 Floor & Wall Thin Set Mortar, LATICRETE 282 Mortar Admix
Estancia Mall	Estancia Mall	LATICRETE Flexible Tile Adhesive 335, LATICRETE Unsanded Grout 1600
Greenbelt Mall	Makati City	LATICRETE Latex Additive 4237+LATICRETE Crete Filler Powder 211, LATICRETE 1600 Unsanded Grout
Marco Polo Ortigas Hotel	Pasig City	LATICRETE Premium Tile Adhesive 325, LATICRETE Latex Additive 4237+LATICRETE Crete Filler Powder 211, SPECTRALOCK Pro Grout
Marriot Grand Ballroom	Pasay City	Latex Additive 4237 + LATICRETE Crete Filler Powder 211, LATICRETE Unsanded Grout 1600
Marriot West Wing	Pasay City	LATICRETE Flexible Tile Adhesive 325, LATICRETE Unsanded Grout 1600
Okada	Paranaque City	LATICRETE 335 LATICRETE Latex Additive 4237 + LATICRETE Crete Filler Powder 211, LATICRETE Unsanded Grout 1600, LATICRETE Flexible Tile Adhesive 325, SPECTRALOCK Pro Grout
One Shangri-La Place Mall	Mandaluyong City	LATICRETE Unsanded Grout 1600, LATICRETE Latex Additive Rapid Set 4237 + LATICRETE Crete Filler Powder 211
Solaire Resort & Casino Phase 1	Paranaque City	LATICRETE 335 LATICRETE Latex Additive 4237 + LATICRETE Crete Filler Powder 211, LATICRETE Unsanded Grout 1600
Solaire Resort & Casino Phase 1A	Paranaque City	LATICRETE Flexible Tile Adhesive 335, LATICRETE Latex Additive 4237 + LATICRETE Crete Filler Powder 211, LATICRETE Hydro Barrier, SPECTRALOCK Pro Grout, LATICRETE 317 Floor and Wall Thinset, LATICRETE Unsanded Grout 1600
The Lind Boracay Hotel	Boracay Island	LATAPOXY 300 Adhesive, LATICRETE Unsanded Grout 1600, LATICRETE 317 Floor and Wall Thinset
The Rise	Makati City	LATICRETE 317 Mortar, LATICRETE Latex Additive 4237 + LATICRETE 211 Crete Filler Powder, SPECTRALOCK Pro Grout, LATICRETE 1600 Unsanded Grout
Twin Oaks Place Tower 1	Mandaluyong City	LATICRETE Thinset 317, LATICRETE Unsanded Grout 1600, LATICRETE Mortar Admix 282
Zuellig	Makati City	LATICRETE 325, LATICRETE Unsanded Grout 1600
Ramon Magsaysay Center	Manila City	LATICRETE 4237 Latex Additive



Ramon Magsaysay Center, Manila City



Solaire Resort, Parañaque City

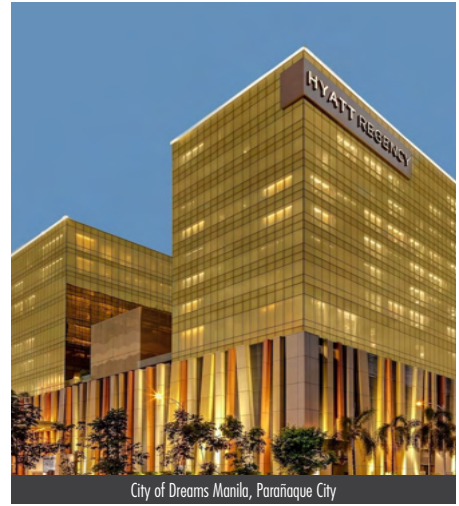

City of Dreams Manila, Parañaque City



Greenbelt Mall, Makati City



Marco Polo, Pasig City




Ascott Bonifacio Global City, Taguig City



Okada Manila, Parañaque City



Marriott Grand Ballroom, Pasay City

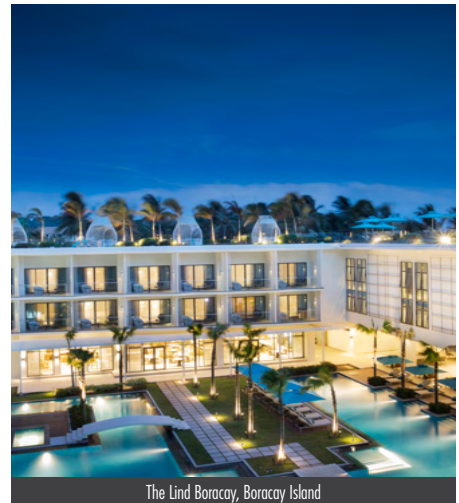

The Lind Boracay, Boracay Island

Disclaimer: LATICRETE® claims no credit for any images used on this catalog unless otherwise noted.

Corporate Headquarters:

LATICRETE International, Inc.
One LATICRETE Park North Bethany,
CT 06524-3423 USA
1.800.243.4788
+1.203.393.0010
www.laticrete.com

Africa: +27.078.343.4029
Asia Pacific: +852.2526.6660
Australia: +61.7.3865.1599
China: +86.21.5789.3300
Europe: +44.871.284.5959
India: +91.40.3041.3100
Latin America: +1.203.393.0010
Middle East.: +971.7.244.6396
South East Asia: + 65.6515.3028
Mexico: +52.81.8348.51 21
UK: +44.151.486.6101

Marina Bay Sands, Singapore

LATICRETE REPRESENTATIVE:

CONTACT DETAILS:

EMAIL:



LATICRETE PHILIPPINES, INC.

Lot 9A, Manggahan Industrial Park, Brgy. Manggahan, Sta. Maria, Bulacan 3022
▪ (02) 8656 6118 ▪ (02) 8260 6303 ▪ ph.laticrete.com ▪ info@laticrete.ph

© 2023 LATICRETE Philippines, Inc.
All trademarks shown are the intellectual properties of their respective owners.

Disclaimer: LATICRETE® claims no credit for any images used on this catalog unless otherwise noted.

**Globally Proven
Construction Solutions**

-  @laticretephilippines
-  @laticreteph
-  @LaticretePh
-  @laticreteph
-  @laticreteph
-  Laticrete Philippines
-  @laticretephilippinesinc