



# Product Selection Catalog

## BUILD BETTER TOGETHER WITH LATICRETE

YOUR ONE-STOP-SHOP FOR  
CONSTRUCTION SOLUTIONS

- STAIN-PROOF GROUT ▪ TILE & STONE ADHESIVE ▪ WATERPROOFING MEMBRANES ▪ SKIM COAT ▪ SELF-LEVELING
- TILE & STONE CARE SYSTEMS ▪ CONCRETE CONSTRUCTION CHEMICALS ▪ DECORATIVE FINISHES ▪ EPOXY ADHESIVE



For the Builders of a Better World™

Scan for more information



# LATICRETE PHILIPPINES, INC.

For the Builders of a Better World™



## ROOTED IN INNOVATION, GROWING FOR EXCELLENCE

### OUR BRAND PROMISES



INNOVATIVE



COMMITTED TO  
SUSTAINABILITY



ENABLING  
ICONIC DESIGNS



TRUSTED FOR  
LIFE



BEST INSTALLER  
EXPERIENCE



OUR CUSTOMERS  
ARE OUR FAMILY

## ADHESIVES & MORTARS

305 Tile Adhesive   315 Mortar	05
325 FLEX	06
335 HIFLEX	07
254 Platinum	08
4237 Thin-Set Mortar Additive + 211 Crete Filler Powder	09
LATAPOXY® 300 Adhesive	10
LATAPOXY® 310 Stone Adhesive	11

## THICK BED MORTARS & SCREEDS

3701 Mortar Admix + 226 Thick Bed Mortar	13
278 Mortar Admix   282 Mortar Admix	14
S/R Mortar	15

## WALL FINISHES

Lataskim 418   Lataskim 419	17
-----------------------------	----

## WATERPROOFING

Hydro Ban®   Hydro Barrier™	19
Rayshield Heat Reflective	20
Vapex	21
Hydropel	22
Root Lock   H2Opel	23

## GROUT

SPECTRALOCK® PREMIUM NS Grout	25-27
SPECTRALOCK® PRO PREMIUM Grout	28
SPECTRALOCK® DAZZLE™	29
1776 Grout Enhancer   1600 Unsanded Grout	30
Grout Color Selection	31

## FLOOR AND STONE CARE

STONETECH® KlenzAll™	33
STONETECH® Epoxy Grout Haze & Coating Stripper   STONETECH® Restore™	34
STONETECH® Stone & Tile Cleaner   STONETECH® Enhancer Pro™	35
STONETECH® BulletProof®   STONETECH® Heavy Duty Sealer	36
STONETECH® Heavy Duty Exterior   STONETECH® Impregnator Pro	37

## COMPANY PROFILE 38-39

## PROJECT HIGHLIGHTS 40-41



Burj Khalifa, a LATICRETE® project, is the tallest structure and building in the world since its topping out in late 2008.



A modern kitchen featuring light-colored wood cabinetry, a dark countertop, and a stainless steel range hood. The floor is covered in large, dark tiles. The text is overlaid on the right side of the image.

# ADHESIVES ADHESIVES & MORTARS & MORTARS

Choose LATICRETE® adhesives and mortars to ensure installations go faster, easier, and with predictable results time after time.

LATICRETE® adhesives and mortars have re-set the standard for industry performance. From high-strength construction epoxy adhesive to thinset or thick bed mortar, LATICRETE® adhesives are custom-formulated to deliver speed and efficiency on the entire range of applications.

## 305 TILE ADHESIVE

### DRY SET ADHESIVE



LATICRETE® 305 Tile Adhesive is a bagged cementitious powder to be mixed with water for installing ceramic tile and porcelain using the thin-set method of interior installation.

#### FEATURES/USES

- Dual-purpose – for walls and floors
- Easy to use – peanut butter consistency
- Consistent quality
- Proven performance
- Interior applications on floors and walls, over masonry, concrete, mortar beds, cement plaster

#### PACKAGING & COLOR

- 25 kg bag (Grey)

#### APPROXIMATE COVERAGE

7.4 to 8.8 m<sup>2</sup> with 6 mm x 6 mm square notch trowel.

\*Coverage will vary depending on trowel notch size, type and size of tile and substrate.

#### STANDARDS / CERTIFICATIONS

- ANSI A118.1-1999
- EN12004

## 315 MORTAR

### POLYMER-MODIFIED THIN BED ADHESIVE



LATICRETE® 315 Mortar is a bagged cementitious powder, to be mixed with either water or latex admixture for installing ceramic tile and porcelain using the thin-set method of installation.

#### FEATURES/USES

- Dual-purpose—for walls and floors
- Smooth, easy-to-trowel formula
- Consistent quality
- Proven performance

#### PACKAGING & COLOR

- 25 kg (Grey / White)

#### APPROXIMATE COVERAGE

7.4 to 8.8 m<sup>2</sup> with 6 mm x 6 mm square notch trowel.

\*Coverage will vary depending on trowel notch size, type and size of tile and substrate.

#### STANDARDS / CERTIFICATIONS

- ANSI A118.4 American National Standard Specifications for Modified Dry-Set Cement Mortar
- BS EN 1346
- BS EN 1348



This product has been certified green under the UL GREENGUARD Certification Program and Singapore Green Building Council.

# 325 FLEX

## PREMIUM TILE ADHESIVE



LATICRETE® 325 FLEX is a high-performance, polymer-modified, cementitious thin-set powder that is to be mixed only with water and applied using the thin-set method of installation. It is designed for interior and exterior, floor and wall installation of all types of ceramic tiles and natural stones over concrete and variety of substrates.

### FEATURES/USES

- Bonds to most substrates
- Water- and heat-resistant
- Ready to use, just mix with water
- Long open time
- Strong bond and durable

### PACKAGING & COLOR

- 25 kg (Grey / White)

### APPROXIMATE COVERAGE

8.0 to 8.5 m<sup>2</sup> with 6 mm x 6 mm square notch trowel.

\*Coverage will vary depending on trowel notch size, type and size of tile and substrate.

### STANDARDS / CERTIFICATIONS

- ANSI A118.4 American National Standard Specifications for Modified Dry-Set Cement Mortar
- BS EN 1346
- BS EN 1348
- BS EN 1308



This product has been certified green under the Singapore Green Building Council.

# 335 HIFLEX

## FLEXIBLE CEMENTITIOUS TILE ADHESIVE



LATICRETE® 335 HIFLEX is a high-performance, polymer-modified, flexible cement-based adhesive that is to be mixed only with water using the thin-set method of installation. It is designed for interior and exterior; floor and wall installation of all types of ceramic tiles and natural stones over concrete and variety of substrates.

### FEATURES/USES

- High adhesion
- Flexible
- Water- and heat-resistant
- Ready to use, just mix with water
- Long open time
- Strong bond and durable

### PACKAGING & COLOR

- 25 kg (Grey / White)

### APPROXIMATE COVERAGE

8.0 to 8.5 m<sup>2</sup> with 6 mm x 6 mm square notch trowel.

\*Coverage will vary depending on trowel notch size, type and size of tile and substrate.

### STANDARDS / CERTIFICATIONS

- ANSI A118.4 American National Standard Specifications for Modified Dry-Set Cement Mortar
- BS EN 1346
- BS EN 1348
- BS EN 1308
- BS EN 12002



This product has been certified green under the Singapore Green Building Council.





# 254 PLATINUM

## POLYMER-MODIFIED THIN BED ADHESIVE



The ultimate one-step, polymer-fortified, thin-set mortar for interior and exterior installation of ceramic tile, stone, quarry tile, pavers, and brick. 254 Platinum, designed to just mix with water, has a long open time with unsurpassed adhesion and workability. 254 Platinum is a LATICRETE® approved substitute for LATICRETE® 211 Powder mixed with LATICRETE® 4237 Latex Additive.

Excellent for exterior and underwater applications as well as providing superior bond to exterior-glue plywood (interior use only) and concrete. The ultimate thin-set for porcelain and glass tiles.

### FEATURES/USES

- Exceeds ANSI A118.4 Shear Bond Strength Requirements and ANSI A118.11
  - Conforms to ISO 13007 with a classification of C2TES1P1
  - Ultimate adhesion for porcelain and glass tiles
  - Incredible bond to exterior-glue plywood and concrete\*
  - Superior for exterior and submerged applications
  - High shear bond strength
  - Smooth and creamy formula
- \* Refer to Technical Data Sheet for its limitations

### PACKAGING & COLOR

- 25 kg (Grey / White)

### APPROXIMATE COVERAGE

7.5 m<sup>2</sup> with 6mm x 6mm square notch trowel

\*Coverage will vary depending on trowel notch size, type, and size of tile and substrate.

### STANDARDS / CERTIFICATIONS



This product has been certified green under the UL GREENGUARD Certification Program



## 4237 THIN SET MORTAR ADDITIVE

### THIN-SET ADDITIVE

## 211 CRETE FILLER POWDER

### POLYMER-MODIFIED THIN BED ADHESIVE



LATICRETE® 4237 Thin Set Mortar Additive is a specially-designed latex additive for use with LATICRETE® 211 Crete Filler Powder, a factory-prepared blend of carefully selected raw materials, Portland cement, and graded aggregates. Combine these two to make a high-strength thin-set mortar bed (up to 3mm thick), or a medium mortar bed (up to 15 mm thick). For installing all types of ceramic tile, natural stone, mosaic, and agglomerate. LATICRETE® 4237 Thin Set Mortar Additive is also used with Portland cement to make slurry bond coats for mortar beds and with thin set mortars to give improved performance and longer open time.

### FEATURES

- Superior bond strength: 250% greater than ANSI A118.4
- Flexible and shock-resistant; rated for extra-heavy traffic conditions
- Weather- and frost-resistant; for interior and exterior use in all types of climates
- Proven performance; used in all types of applications for over 60 years
- Safe, economical, and easy-to-use; non-hazardous, non-flammable
- Recommended for wet and dry areas
- Premixed—no jobsite blending of powders required
- Safe, economical, and easy to use; non-hazardous, non-flammable
- High-strength formula—meets and exceeds national and international standards
- Versatile—wet and dry areas, walls, floors, and ceilings
- Excellent for use in swimming pools, fountains, and water features

### PACKAGING & COLOR

- 4237 Thin Set Mortar Additive: (20 L pail / 210 L drum)
- 211 Crete Filler Powder: 23 kg bag (Grey & White)

### APPROXIMATE COVERAGE

23 kg bag of 211 Crete Filler Powder with 6.5 to 7.1 L of 4237 Thin-Set Mortar Additive will yield a coverage of 7.4 to 8.8 m<sup>2</sup> with 6 mm x 6 mm square notch trowel.

\*Coverage will vary depending on trowel notch size, type and size of tile and substrate.

### STANDARDS / CERTIFICATIONS

- ANSI A118.4 American National Standard Specifications for Modified Dry-Set Cement Mortar
- BS EN 1346, BS EN 1348, BS EN 1308, BS EN 12002

This product has been certified green under the UL GREENGUARD Certification Program and Singapore Green Building Council.



# LATAPOXY® 300 ADHESIVE

## FULL BEDDING EPOXY ADHESIVE



LATAPOXY® 300 Adhesive is a chemical-resistant, epoxy adhesive that will bond to most stable, clean surfaces. This adhesive spreads easily and cleans with water while fresh. LATAPOXY® 300 Adhesive is a factory-proportioned kit consisting of epoxy resin, hardener, and chemical-resistant silica filler. LATAPOXY® 300 Adhesive can be used in interior and exterior (see Technical Data Sheet for its capacities) walls and floors, wet and dry areas.

### FEATURES/USES

- Bonds to most substrates
- Water-cleanable
- No flammable solvents required to clean tools or finished work
- Ideal for installing moisture-sensitive marble and agglomerate tiles
- Ideal for the installation of resin-backed tile, mosaics, stone, and agglomerates
- Non-staining on white and light-colored marble
- High bond strength
- Maximum chemical resistance

For use in heavy-duty, commercial, and chemical-resistant installations in food-processing areas, commercial kitchens, restaurants, etc.

Note: The Tile Council of North America recommends the use of epoxy adhesives and grouts for thin-set installations on suspended concrete slabs and for floors and walls where chemical resistance is required.

### PACKAGING

- 11.3 kg set / full pail

### APPROXIMATE COVERAGE

LATAPOXY® 300 Epoxy Adhesive can cover 30 to 35 sq. ft./2.8 to 3.3 m<sup>2</sup> with a 6 x 6 mm square notch trowel

### STANDARDS / CERTIFICATIONS

- ANSI A118.3, American National Standard Specifications for Chemical Resistant, Water Cleanable Tile-Setting and Grouting Epoxy and Water Cleanable Tile-Setting Epoxy Adhesive
- EN 1346
- EN 12003



This product has been certified green under the UL GREENGUARD Certification Program.

# LATAPOXY® 310 STONE ADHESIVE

## SPOT BONDING EPOXY ADHESIVE



LATAPOXY® 310 Stone Adhesive is a two-component, high-strength epoxy adhesive formulated for spot-bonding or fixing method of tile and stone installations on vertical surfaces. LATAPOXY® 310 Stone Adhesive maintains its non-sag consistency at high temperatures up to 35°C.

### FEATURES/USES

- Bonds to most substrates
- Fast permanent bond
- Easy to use—1:1 mixing ratio by volume
- Non-staining—ideal for white and light colored marbles, other stones, and tiles
- Withstands shock and vibration
- Durable, permanent bond will not deteriorate over time
- Safe—no solvents
- Non-sag even when applied up to 1" (25 mm) thick
- Approved by the following building code bodies for exterior installations: BOCA, ICBO, SBCCI, ICC
- Use for spot-bonding marble, granite, and large format ceramic tile on walls and overheads, interior or exterior, dry or wet applications
- Adhesive for bonding masonry, precast concrete, and stone panels
- Ideal for fireplace surroundings, elevators, and stair risers
- Adhesive for fabricating granite, marble, and other stone
- Adhesive for bedding and fastening marble, granite, and other stone slabs on walls and wainscoting

### PACKAGING

FULL Unit: 10 kg set:

- 5 kg Part A pail ■ 5 kg Part B pail

MINI Unit: 1 kg set:

- 500 g Part A pail ■ 500 g Part B pail

### APPROXIMATE COVERAGE

LATAPOXY® 310 Stone Adhesive can cover 20 to 21 m<sup>2</sup> of tile or stone surface area with a 10 kg set, and around 50 cm<sup>2</sup> with a 1 kg set, if only 10% of the total surface area using five equal spots with 3 mm thickness on a flat wall.

### STANDARDS / CERTIFICATIONS

- ANSI A118.3, American National Standard Specifications for Chemical Resistant, Water Cleanable Tile-Setting and Grouting Epoxy and Water Cleanable Tile-Setting Epoxy Adhesive
- EN 13007-1



This product has been certified green under the UL GREENGUARD Certification Program.



# THICK BED MORTARS & SCREEDS

LATICRETE® has a variety of thick-bed mortars and screed products for use in interior and exterior installations in both residential and commercial applications. Choose from thick-bed mortars for the smallest of jobs, to pumpable mortar beds for large-scale veneer projects. Add 3701 Mortar Admix to all LATICRETE® thick-bed mortars for an economical and easy way to increase bond and compressive strength.

Thick-bed mortar products from LATICRETE® can also be used to create bonded, un-bonded, floating or heated screeds to bring the installation surface for the flooring to the design height, and provide a surface suitable for installing the specified flooring.



## 3701 MORTAR ADMIX

## 226 THICK BED MORTAR

### THICK-BED MORTARS & SCREEDS



3701 Mortar Admix is a latex admixture that enhances cement mixes like thin-set mortars and cement grouts. It improves their properties and makes installations of ceramic tile, brick, and natural stone easier and more reliable.

226 Thick Bed Mortar is a pre-blended mixture of Portland cement, aggregates, and raw materials. It works together with 3701 Mortar Admix to create a strong latex Portland cement mortar.

### FEATURES

- Interior and exterior installations
- Shock, chemical, and frost resistant
- Increased bond and compressive strength
- Water-resistant; suitable for submerged applications
- Superior flexibility
- "Extra Heavy Service" rating per TCNA performance levels (RE: ASTM C627 Robinson Floor Test)
- Premixed—no jobsite blending of powders required
- Safe—non-flammable; safe to store and mix
- Economical—saves time and money
- Easy to use—no special tools required
- Versatile—wet and dry areas, walls, floors, ceilings, interior and exterior
- High-strength Formula
- "Extra Heavy Service" rating per TCNA performance levels (RE: ASTM C627 Robinson Floor Test)

### PACKAGING

- 20 L pail; 36 pails per pallet
- 27 kg bag; 56 bags per pallet

### APPROXIMATE COVERAGE

27kg of 226 Thick Bed Mortar (floor screed) when mixed with - 2.7 L - 3.1 L of 3701 Mortar Admix/ Latex, yielding approximately 0.8 to 0.9m<sup>2</sup> at 20 mm thick.

### STANDARDS / CERTIFICATIONS

(3701 Mortar Admix + 226 Thick BedMortar)

These products have been certified green under the UL GREENGUARD Certification Program.



## 278 MORTAR ADMIX

### THICK-BED MORTARS & SCREEDS



LATICRETE® 278 Mortar Admix is a special latex additive for tile grouts, thin-set mortars, and cement mortar beds. A simple and economical way to make permanent, problem free installation.

#### FEATURES/USES

- Cleans easily with water
- Safe, non-flammable, non-hazardous
- Used in place of water, LATICRETE® 278 Mortar Admix improves the working and physical properties of any cement mix and provides an economical and easy way to make permanent, trouble-free installations of ceramic tile, brick, and natural stone

#### PACKAGING & COLOR

- 278 Mortar Admix: (4 L Unit, 20 L pail)

#### APPROXIMATE COVERAGE

- 4 L unit: covers approx. 0.64 m<sup>2</sup> at 20 mm thickness with LATICRETE® Thick Bed Mortar
- 20 L Pail: yields approx. 6.7 m<sup>2</sup> at 20 mm thickness with LATICRETE® Thick Bed Mortar

#### STANDARDS / CERTIFICATIONS

- ASTM C109
- BS 13892

## 282 MORTAR ADMIX

### THICK-BED MORTARS & SCREEDS



LATICRETE® 282 Mortar Admix is a special latex additive for tile grouts, thin-set mortars, and cement mortar beds. A simple and economical way to make permanent, problem-free installations.

#### FEATURES/USES

- Cleans easily with water
- Safe, non-flammable, non-hazardous
- Easy application
- Used in place of water, LATICRETE® 282 Mortar Admix improves the working and physical properties of any cement mix and provides an economical and easy way to make permanent, trouble-free installations of ceramic tile, brick, and natural stone

#### PACKAGING & COLOR

- 282 Mortar Admix: (20 L pail)

#### APPROXIMATE COVERAGE

- 20 L Pail: yields approx. 6.7 m<sup>2</sup> at 20 mm thickness with LATICRETE® Thick Bed Mortar

#### STANDARDS / CERTIFICATIONS

- ASTM C109
- ASTM C413
- ASTM C348
- BS 13892

This product has been certified green under the Singapore Green Building Council.





# S/R MORTAR

## THICK-BED MORTARS & SCREEDS



LATICRETE® S / R Mortar is a polymer-fortified blend of carefully selected polymers, Portland cement, and graded aggregates. LATICRETE® S / R Mortar does not require the use of latex admix; you only need to add water to produce a thick bed mortar with exceptional strength. It is especially intended for medium to thick screed or for improving the surfaces of concrete before tiling and levelling to specific ceiling height.

### FEATURES/USES

- Polymer-fortified—no need for latex additives
- Economical—saves time and money
- Premixed—no job site blending of powders required
- Pumpable for large scale projects

### PACKAGING & COLOR

- 40 kg bag

### APPROXIMATE COVERAGE

A 40 kg bag will cover 22 to 25 m<sup>2</sup> at 1 mm thickness

### STANDARDS / CERTIFICATIONS

- ASTM C109/109M:2013
- BS EN 1015-9:1999(Method A)
- ASTM C348:2008
- BS EN 1015-11:1999
- BS EN1015-12:2000
- BS EN 1015-12:2000
- BS EN 13412:2006
- HDB's Test Method for Prepacked Mortar
- BS 4551:2005+A2:2003
- BS EN 1015-18:2002
- ASTM C413:2001(2012)
- ASTM C531:2000(2012)
- Cuthiho ring
- ADM/C&B/001:2013
- ASTM C1437:2013
- ADM/C&B/002:2010

# WALL FINISHES **WALL FINISHES** WALL FINISHES

LATICRETE® is a leading manufacturer of high-quality building materials, including wall finishes. LATICRETE® wall finishes are designed to provide a smooth, durable, and attractive finish for a wide range of interior and exterior wall surfaces.

LATICRETE® wall finishes offer a high-quality solution for anyone looking to finish interior or exterior walls. With their superior performance properties, aesthetic appeal, and versatility, LATICRETE® wall finishes are an excellent choice for any construction project.



## LATASKIM 418 WALL FINISHES



LATICRETE® LATASKIM 418 is a high-quality, polymer-fortified cementitious skim coat with excellent water retention, adhesion, and workability properties.

### FEATURES/USES

- High bond and compressive strength
- Economical
- No primer required
- Interior installations

### PACKAGING & COLOR

- 20 kg bag ■ White / Gray

### APPROXIMATE COVERAGE

A 20 kg bag will cover 16 m<sup>2</sup> at 1 mm thickness

### STANDARDS / CERTIFICATIONS

- BS EN 1015-12
- BS EN 1015-11
- ASTM C531

## LATASKIM 419 WALL FINISHES



LATICRETE® LATASKIM 419 is a high quality, polymer-fortified cementitious skim coat with excellent water retention, adhesion, and workability properties.

### FEATURES/USES

- High bond and compressive strength
- Economical
- No primer required
- Versatile—one product for interior and exterior installations

### PACKAGING & COLOR

- 20 kg bag ■ White / Gray

### APPROXIMATE COVERAGE

A 20 kg bag will cover 16 m<sup>2</sup> at 1 mm thickness

### STANDARDS / CERTIFICATIONS

- BS EN 1015-12
- BS EN 1015-11
- ASTM C531





# WATERPROOFING **WATERPROOFING** WATERPROOFING

LATICRETE® waterproofing products provide protection for floors and walls for applications ranging from occasionally wet, to continuous water submersion as in showers or pools. Choose from liquid waterproofing membranes which can be applied for both waterproofing and as a crack isolation membrane / anti fracture, or waterproofing sheet membranes which allow for a quick, easy waterproof installation.

# HYDRO BAN® WATERPROOFING MEMBRANE



LATICRETE® HYDRO BAN® Waterproofing Membrane is a thin, load-bearing waterproofing/crack isolation membrane. A single-component self-curing liquid rubber polymer that forms a flexible, seamless waterproofing membrane. LATICRETE® HYDRO BAN® bonds directly to a wide variety of substrates.

## FEATURES/USES

- Bonds directly to metal and PVC plumbing fixtures
- Thin, only 0.5 mm to 0.8 mm thick when cured
- Equipped with anti-microbial technology
- Install tile, brick, and stone directly onto membrane

## PACKAGING

- 3.8 L pail ■ 20 L pail

## APPROXIMATE COVERAGE

- A 20 L pail of LATICRETE® Hydro Ban® Waterproofing Membrane yields approximately 24 m<sup>2</sup> per 2 coats, while a 3.8 L pail of Hydro Ban® can cover approximately 4.56 m<sup>2</sup> per 2 coats.

## STANDARDS / CERTIFICATIONS

- ASTM D412
- ASTM D4541
- ASTM C836
- ASTM D2240
- DIN 1048



This product has been certified green under the UL GREENGUARD Certification Program and Singapore Green Building Council.

# HYDRO BARRIER™ WATERPROOFING MEMBRANE



LATICRETE® Hydro Barrier™ Waterproofing Membrane is a liquid-applied, self-curing liquid rubber polymer that can be easily applied to form a flexible, seamless, waterproofing anti-fracture membrane. LATICRETE® Hydro Barrier™ can be used on interior and exterior, horizontal or vertical surfaces, and is approved by IAPMO for use as shower pan liner.

## FEATURES/USES

- Thin, only 0.5 to 0.8 mm thick when cured
- Lighter color for ease of inspection
- Safe—no solvents and non-flammable
- Install tile, brick, and stone directly onto membrane

## PACKAGING

- 3.8 L pail ■ 20 L pail

## APPROXIMATE COVERAGE

- A 20 L pail of LATICRETE® Hydro Barrier™ Waterproofing Membrane yields approximately 24 m<sup>2</sup> per 2 coats, while a 3.8 L pail of Hydro Barrier™ can cover approximately 4.56 m<sup>2</sup> per 2 coats.

## STANDARDS / CERTIFICATIONS

- ASTM D412
- ASTM D4541
- ASTM C836
- ASTM D2240
- DIN 1048



This product has been certified green under the UL GREENGUARD Certification Program and Singapore Green Building Council.



# RAYSHIELD HEAT REFLECTIVE WATERPROOFING MEMBRANE



LATICRETE® Rayshield Heat Reflective Waterproofing Membrane is a one-component, liquid-applied waterproofing membrane that provides excellent reflectance and elastomeric properties for exposed applications. Ideal for use on all new and old rooftops, terraces and balconies, floors, and walls.

## FEATURES/USES

- Reduces heat transmission
- Able to accommodate movement and bridge cracks up to 3 mm
- Excellent resistance to ultraviolet rays
- Reduces dirt pick up
- Foot trafficable when cured
- High adhesion strength
- Interior and exterior

## PACKAGING

- 3.8 L pail
- 20 L pail

## APPROXIMATE COVERAGE

- A 20 L pail of LATICRETE® Rayshield Heat Reflective Waterproofing Membrane yields approximately 24 m<sup>2</sup> per 2 coats, while a 3.8 L pail of Rayshield Heat Reflective Waterproofing Membrane can cover approximately 4.56 m<sup>2</sup> per 2 coats.

## STANDARDS / CERTIFICATIONS

- ASTM D2370
- ASTM E96
- ASTM D2240
- ASTM E154
- ASTM C836
- ASTM G154



This product has been certified green under the Singapore Green Building Council.



# VAPEX

## WATERPROOFING MEMBRANE



LATICRETE® Vapex Waterproofing Membrane is a versatile and easy-to-use, exposed waterproofing membrane that provides excellent flexibility and protection of substrates from water penetration and ultra violet rays. Ideal for use on all rooftops, terraces and balconies, floors, and walls.

### FEATURES/USES

- Easy to install—applies like paint
- Protects substrates from water damage
- Excellent resistance in high and low temperatures
- Excellent adhesion on substrates even without use of primer
- Able to bridge cracks up to 3 mm
- Interior and exterior
- Rooftops and roof terraces
- Balconies
- Over existing metal roofs

### PACKAGING

- 3.8 L pail
- 20 L pail

### APPROXIMATE COVERAGE

- A 20 L pail of LATICRETE® Vapex Waterproofing Membrane yields approximately 24 m<sup>2</sup> per 2 coats, while a 3.8 L pail of Vapex Waterproofing Membrane can cover approximately 4.56 m<sup>2</sup> per 2 coats.

### STANDARDS / CERTIFICATIONS

- ASTM D2370
- ASTM E96
- ASTM D2240
- ASTM E154
- ASTM C836
- ASTM G154



# HYDROPEL WATERPROOFING MEMBRANE



LATICRETE® Hydropel Waterproofing Membrane is a two-component, cementitious, seamless, polymer-modified waterproofing membrane that cures to form a tough and flexible membrane to protect all concrete and masonry surfaces against the ingress of water and moisture.

## FEATURES/USES

- No primer required on the substrate before application
- Can be applied on damp—not moist—substrates
- Non-toxic, ideal for potable water uses
- Install tile, brick, and stone directly onto membrane
- Safe—no solvents and non-flammable
- Excellent bond on the substrates and good adhesion under water impact
- Smooth and creamy
- Easy to apply
- Good climate resistance
- Recommended for wall and floor in wet areas such as toilets, bathrooms, and kitchens
- For cellar walls
- Balconies and terraces
- Sewers
- Grain silos
- Surface protection for structural concrete (as protection against CO<sub>2</sub>, chlorides, sulphate, and humidity)

## PACKAGING

- 1 set (36 kg / set) consists of:  
1 bag of powder ( 22 kg )  
1 pail of liquid ( 14 L )
- 1 set (3.8 kg / set) consists of:  
2.1 kg of powder & 1.7 L liquid

## APPROXIMATE COVERAGE

- A 36 kg set of LATICRETE® Hydropel Waterproofing Membrane can yield approximately 32.3 m<sup>2</sup> with 2 coats.
- A 3.8 kg of LATICRETE® Hydropel Waterproofing Membrane set can cover approximately 3.4 m<sup>2</sup> with 2 coats.

## STANDARDS / CERTIFICATIONS

- ANSI A118.10, American National Standard Specifications for Load-Bearing, Bonded, Waterproof Membranes for Thin-set Ceramic Tile and Dimension Stone Installation
- ASTM D412
- ASTM D4541
- ASTM D2240
- ASTM C836



This product has been certified green under the Singapore Green Building Council.

# ROOT LOCK WATERPROOFING MEMBRANE



LATICRETE® Root Lock Membrane is a one-component, strong, and durable liquid-applied waterproofing membrane that cures into a flexible, high-adhesion membrane, which provides a green solution for planter and landscaping applications. It contains special fillers to prevent roots from puncturing through the membrane.

## FEATURES/USES

- Excellent resistance in high and low temperatures
- Excellent adhesion on substrates even without use of primer
- Resistance to puncturing, tearing, and wearing
- Double usage as a waterproofing and root resistance membrane
- Interior and exterior
- Swimming pools, fountains, and water features
- Spas and hot tubs
- Planter boxes

## PACKAGING

- 20 L pail

## APPROXIMATE COVERAGE

A 20 L pail of LATICRETE® Root Lock Membrane yields approximately 24 m<sup>2</sup> per 2 coats.

## STANDARDS / CERTIFICATIONS

- ASTM D2240
- ASTM E96/E96M
- ASTM C836
- DIN 4062
- ASTM D412

This product has been certified green under the Singapore Green Building Council.



# H2OPEL WATERPROOFING MEMBRANE



LATICRETE® H2OpeL Waterproofing Membrane is a two-component, flexible, polymer-modified membrane designed to protect substrates like concrete and masonry from the ingress of water vapor or moisture.

## FEATURES/USES

- No primer required on the substrate before application
- Can be applied on damp—not moist—substrates
- Non-toxic, ideal for potable water uses
- Install tile, brick, and stone directly onto membrane
- Smooth and creamy; easy to apply
- Good climate resistance
- Recommended for wall and floor in wet areas such as toilets, bathrooms, and kitchens

## PACKAGING

- 1 set (36 kg / set) consists of: 1 bag of powder ( 22 kg )  
1 pail of liquid ( 14 L )

## APPROXIMATE COVERAGE

- A 36 kg set of LATICRETE® H2OpeL Waterproofing Membrane can yield approximately 32.3 m<sup>2</sup> with 2 coats.

## STANDARDS / CERTIFICATIONS

- ASTM C836
- ASTM D2240
- ASTM D4541
- ASTM D412





# GROUTS GROUTS GROUTS

Finding tile grout that will withstand time, wear, and the elements has been a challenge confronted by installers, designers and builders for decades. Thanks to the dedication and ingenuity of the experts at LATICRETE®, our grout products offer features such as stain resistance, antimicrobial protection and simple cleaning.

For over 67 years, the experts at LATICRETE® have developed revolutionary tile grout technology to solve age-old installation grout problems while simultaneously adding design flexibility and color consistency. Epoxy grout, hybrid and cement grouts have been developed to deliver all the features and benefits sought by building professionals and home owners alike. LATICRETE® grout products exceed the toughest commercial criteria, providing worry-free installations.



# SPECTRALOCK® PREMIUM NS

## STAIN RESISTANT EPOXY GROUT

PROTECTION THAT LIVES ON  
**MICROBAN®**



Stain Resistant^^



Strong and Durable



Anti-Bacterial  
and Anti-Fungal



Easy to Install &  
Easy to Clean!

^^Stain Resistant (residential installation only) to common household cleaners, liquids and other goods. Clean all spills immediately.

# SPECTRALOCK® PREMIUM NS GROUT

## EPOXY GROUT

SPECTRALOCK® PREMIUM NS Grout is a stain resistant, durable, chemical resistant, 100% solid epoxy grout for ceramic tile, porcelain tile, marble and stone. SPECTRALOCK® PREMIUM NS Grout is enhanced with Microban® antimicrobial technology providing around-the-clock protection from the growth of microbes including bacteria, mold and mildew.

### FEATURES/USES

- Meets performance requirements of ANSI A118.3-1999
- Inhibits the growth of stain-causing mold and mildew in the grout joints with antimicrobial product protection
- Ideal for installations at wide temperature ranges
- Uniform color—no blotchiness or shading
- Easy to maintain, cleanable to the original color
- Chemical resistant
- Stain-resistant
- Tough, durable, and crack-resistant
- Outperforms cement-based grout
- Non-sag formula for walls and floors
- Can be made high-fashion with the addition of Dazzle™ component

### PACKAGING

#### 2KG SET

- SPECTRALOCK® PREMIUM NS Grout Part A (0.4 kg)
- SPECTRALOCK® PREMIUM NS Grout Part B (0.4 kg)
- SPECTRALOCK® PREMIUM NS Grout Part C (1.8 kg)

### APPROXIMATE COVERAGE

- Actual coverage will vary depending on job site conditions, actual tile size and installed grout joint size. Add 10% for waste, spillage and clean-up, and another 10%-15% when grouting unglazed quarry tile.


### STANDARDS / CERTIFICATIONS

- ANSI A118.3, American National Standard Specifications for Chemical-Resistant, Water-Cleanable, Tile-Setting and Grouting Epoxy Adhesive tested on SPECTRALOCK® PRO Grout 1244 Bright White
- ISO 13007-3
- BS EN 13888



# SPECTRALOCK® PREMIUM NS GROUT

## EPOXY GROUT

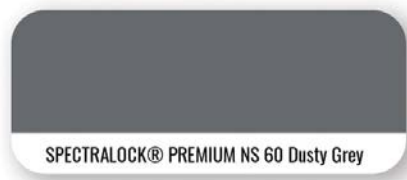

**Grout Colour Guidelines:** Grout colour samples are guides only. LATICRETE does not warrant colour matching to this colour chart or to any colour guide produced. Actual shade and texture will depend on job site conditions, lighting, installation techniques and types/colour of tile or stone used, and may vary from this grout colour chart, grout colour channel kits and grout colour swatch on product packaging. Verify actual appearance and compatibility with a test area before installing. No claims for colour shade variations will be honoured.

**NOTE:** Grout color availability subject to change.

# SPECTRALOCK® PRO PREMIUM GROUT

## EPOXY GROUT



SPECTRALOCK® PRO PREMIUM Grout is designed for use on ceramic tile, glass tile, and stone applications, both residential and commercial. It can be used both interior and exterior on floors and walls. Ideal for re-grouting applications, SPECTRALOCK® PRO PREMIUM Grout is perfect for swimming pools, fountains, and other wet area applications.

### FEATURES/USES

- Meets performance requirements of ANSI A118.3-1999
- Inhibits the growth of stain-causing mold and mildew in the grout joints with antimicrobial product protection
- Ideal for installations at wide temperature ranges
- Uniform color—no blotchiness or shading
- Easy to maintain, cleanable to the original color
- Stain-resistant
- Tough, durable, and crack-resistant
- Outperforms cement-based grout
- Non-sag formula for walls and floors
- Can be made high-fashion with the addition of Dazzle™ component

### PACKAGING

#### FULL UNIT

- SPECTRALOCK® PRO PREMIUM Grout Part A (1 x 0.54 kg)
- SPECTRALOCK® PRO PREMIUM Grout Part B (1 x 0.54 kg)
- SPECTRALOCK® PRO PREMIUM Grout Part C (1 x 4.1 kg)

#### COMMERCIAL UNIT

- SPECTRALOCK® PRO PREMIUM Grout Part A (4 x 0.54 kg)
- SPECTRALOCK® PRO PREMIUM Grout Part B (4 x 0.54 kg)
- SPECTRALOCK® PRO PREMIUM Grout Part C (4 x 4.1 kg)

### APPROXIMATE COVERAGE

TILE SIZE	JOINT WIDTH		
	1/16" (1.5 mm)	1/8" (3 mm)	1/4" (6 mm)
1 x 1 x 1/4" (25 x 25 x 6 mm)	4.2 m <sup>2</sup>	2.1 m <sup>2</sup>	1.1 m <sup>2</sup>
12 x 12 x 3/8" (300 x 300 x 9 mm)	32.3 m <sup>2</sup>	16.2 m <sup>2</sup>	8.1 m <sup>2</sup>
15 x 15 x 3/8" (400 x 400 x 9 mm)	43.3 m <sup>2</sup>	21.7 m <sup>2</sup>	11 m <sup>2</sup>
24 x 24 x 1/2" (600 x 600 x 12 mm)	48.6 m <sup>2</sup>	24.4 m <sup>2</sup>	12.3 m <sup>2</sup>

Add 10% for waste, spillage and clean-up, and another 10%–15% when grouting unglazed quarry tile.

### STANDARDS / CERTIFICATIONS

ANSI A118.3, American National Standard Specifications for Chemical Resistant, Water Cleanable Tile-setting and Epoxy Grouting and Water Cleanable Tile-setting Epoxy Adhesive tested with 1244 (Bright White).

- ISO 13007
- WI 9.1.73



# SPECTRALOCK® DAZZLE™

## EPOXY GROUT COMPONENT



A unique design component, SPECTRALOCK® DAZZLE™ adds metallic and "Glow-In-The-Dark" enhancements to SPECTRALOCK® PRO PREMIUM Grout. These high-end design elements offer limitless imaginative applications. Use SPECTRALOCK® DAZZLE™ on walls and floors. Add a metallic look to plain tile and stone. Accentuate metallic tiles, glass tiles, mosaics, stone, and listellos with Dazzling color combinations. Use SPECTRALOCK® DAZZLE™ in your pools and spas. Use Glow in your bathrooms, hallways, and entryways. For use in interior and exterior applications, on both floors and walls.

### FEATURES/USES


- Available in both metallic and glow-in-the-dark varieties
- For interior and exterior use
- Improved non-sag formula
- Stain-resistant
- Never needs sealing
- Ease of maintenance
- Vibrant, consistent color
- Will not fade or deteriorate—integrally mixed

### PACKAGING & COLOR

- 8.5 oz.

### STANDARDS / CERTIFICATIONS

This product has been certified green under the UL GREENGUARD Certification Program.

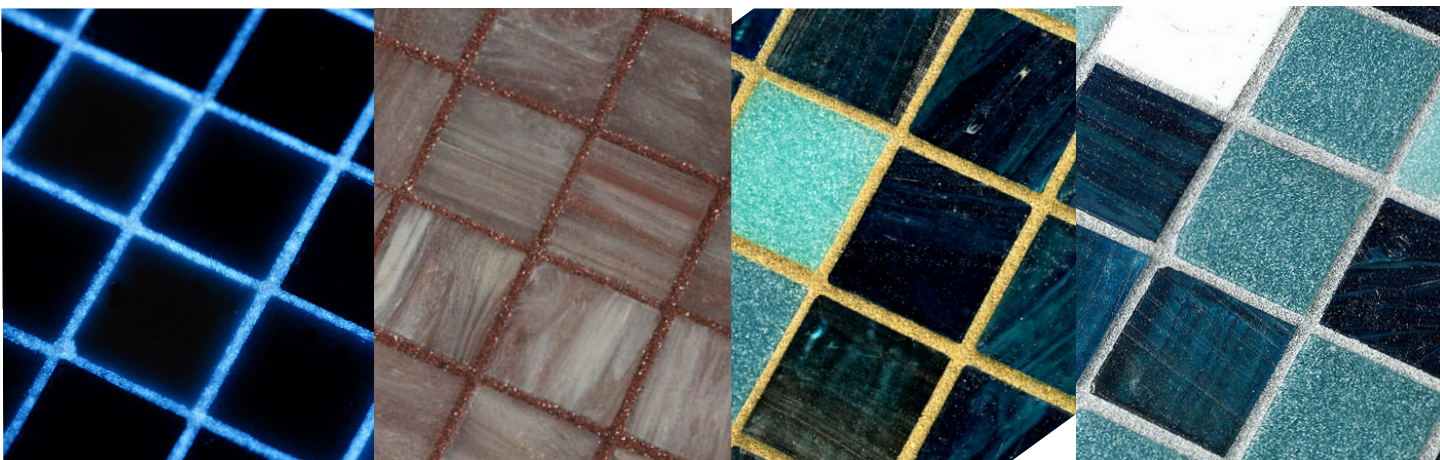



# 1776 GROUT ENHANCER

## CEMENTITIOUS GROUT



# 1600 UNSANDED GROUT

## CEMENTITIOUS GROUT



Designed for use with 1600 Unsanded Grout, 1776 Grout Enhancer is used in place of water to provide a dense, colorfast grout joint that inhibits stain-causing bacteria, mold, and mildew growth. Ideal for all interior and exterior grout applications.

### FEATURES/USES

- Equipped with anti-microbial technology
- Easy to clean—cleans easily using a minimal amount of water
- Inhibits powdering and cracking—provides a denser and stronger Portland cement grout joint
- Locks in grout color—reduces problems with faded or blotchy color in grouts
- Water- and frost-resistant—prevents damage to grouts from weathering, frost, and thermal shock
- Reduces staining
- Reduces moisture absorption
- Designed for interior and exterior use
- “Extra Heavy Service” rating per TCNA performance levels (RE: ASTM C627 Robinson Floor Test)
- Improves flexibility and durability—makes grout more shock-resistant

### PACKAGING & COLOR

- 5 gal (19 L) pail

### STANDARDS / CERTIFICATIONS

- BS EN 12808



This product has been certified green under the UL GREENGUARD Certification Program.

### FEATURES/USES

- Mix with water; or, for improved performance, fortify with LATICRETE® 1776 Grout Enhancer
- Excellent for wet and dry areas
- Non-dusting, non-spalling, and non-yellowing
- Non-shrinking
- Easy application and clean-up
- Available in a range of exciting, non-fading colors for interior and exterior use

### PACKAGING & COLOR

- 20 kg bag / 2 kg pouch ( Up to 40 colors available. Refer to color chart )

### APPROXIMATE COVERAGE

Actual coverage will vary depending on job site conditions, actual tile size, and grout joint size. Add 10% for waste, spillage, and clean-up, and another 10% to 15% when grouting unglazed quarry tile.

### STANDARDS / CERTIFICATIONS

- BS EN 12808



This product has been certified green under the UL GREENGUARD Certification Program and Singapore Green Building Council.

# GROUT COLOR SELECTION

## SPECTRALOCK® PRO PREMIUM & 1600 UNSANDED GROUT

95 Mink



NEW

97 Iron



NEW

44 Bright White



1600

18 Sauterne



1600

16 Siltstone



1600

90 Light Pewter



1600

85 Almond



1600

03 Silk



1600

23 Antique White



1600

39 Mushroom



1600

41 Kashmir



1600

81 Butter Cream



1600

52 Toasted Almond



1600

55 Tawny



1600

17 Marble Beige



1600

40 Latte



1600

61 Parchment



1600

30 Sand Beige



1600

56 Desert Khaki



1600

38 River Rock



1600

27 Hemp



1600

57 Hot Cocoa



1600

92 Saltillo



1600

58 Terra Cotta



1600

46 Quarry Red



1600

43 Chocolate Truffle



1600

66 Chestnut Brown



1600

59 Espresso



1600

35 Mocha



1600

67 Autumn Green



1600

50 Sea Glass



1600

53 Twilight Blue



1600

42 Platinum



1600

91 Slate Grey



1600

88 Silver Shadow



1600

89 Smoke Grey



1600

78 Sterling Silver



1600

24 Natural Grey



1600

34 Sandstone



1600

60 Dusty Grey



1600

45 Raven



1600

22 Midnight Black



1600



SPECTRALOCK®  
PRO PREMIUM  
GROUT

1600

1600 UNSANDED  
GROUT

**Grout Colour Guidelines:** Grout colour samples are guides only. LATICRETE does not warrant colour matching to this colour chart or to any colour guide produced. Actual shade and texture will depend on job site conditions, lighting, installation techniques and types/colour of tile or stone used, and may vary from this grout colour chart, grout colour channel kits and grout colour swatch on product packaging. Verify actual appearance and compatibility with a test area before installing. No claims for colour shade variations will be honoured.

NOTE: Grout color availability subject to change.

# TILE & STONE CARE TILE & STONE CARE TILE & STONE CARE

LATICRETE® offers a professional and retail line of care and maintenance products for tile, natural stone, grout, and masonry surfaces.

Whether it's natural stone, tile, grout, or other material, if your surface has some porosity, it can stain with water, oil, and food-based liquids. Each line provides unique natural-look sealers, enhancing sealers, and specialized cleaners. Natural-look sealers protect but do not alter your surface. All-in-one enhancing sealers darken and/or add a desired shine while protecting the surface. Specialized cleaners in a range of daily, and heavy-duty cleaning solutions can help to remove stains without damaging the surface.

## Clean



## Transform



## Protect





# STONETECH® KlenzAll™ CLEANER

## FLOOR & STONE CARE



STONETECH® KlenzAll™ Cleaner is the heavy duty strength, alkaline cleaner made to remove the toughest dirt, grease and grime from natural stone, tile, masonry and grout. It cleans, degreases and prepares the surface for resealing, is safe on stone and is low VOC. Available in ready-to-use and concentrate formulas for use on heavily used areas such as countertops, walls or floors.

### FEATURES/USES

- Powers through stubborn grease and soils
- Safe on stone, will not etch
- Prepares surface for resealing
- Water-based alkaline formula
- Ready-to-use or concentrate formulas
- Countertops
- Backsplashes
- Floors
- Walls

### PACKAGING

- Available in 1 L unit (Concentrate)

### RECOMMENDED SURFACES

Natural stone, masonry, tile and grout surfaces such as:

- Marble
- Granite
- Quartzite
- Limestone
- Travertine
- Slate
- Sandstone
- Flagstone
- Masonry
- Concrete
- Ceramic Tile
- Porcelain tile



## STONETECH® EPOXY GROUT HAZE & COATING STRIPPER FLOOR & STONE CARE



STONETECH® Epoxy Grout Haze & Coating Stripper is a fast-acting, water-based gel that works as an epoxy grout haze remover and can dissolve tough coatings from vertical and horizontal surfaces. It features a non-runny gel solution that adheres well to vertical applications and is great for walls, floors, countertops and backsplashes.

## STONETECH® RESTORE™ ACIDIC CLEANER FLOOR & STONE CARE



STONETECH® Restore™ Acidic Cleaner is the heavy duty, acidic cleaner that removes dirt, hard water deposits, efflorescence and rust from tile and acid resistant stone, masonry and grout. It quickly renews the surface to a like-new appearance. This no VOC, concentrated cleaner can be diluted to light, medium and heavy duty use and also cleans tough soap scum and light grout haze. Great for use in heavy traffic areas.

### FEATURES/USES

- For natural stone, tile and masonry
- Eliminates epoxy grout haze in 10 minutes or less
- Removes epoxy grout haze and tough coatings - varnish, lacquer, sealer, wax, paint, polyurethane and acrylic
- Fast-acting, non-runny gel - great for vertical and horizontal applications
- Water-based formula
- Low odor, low VOC and non-flammable
- No Methylene Chloride

### PACKAGING

- Available in 1 L unit

### FEATURES/USES

- Removes hard water deposits, grout haze, efflorescence, and soap scum
- Professional strength
- Concentrate formula
- Heavy Duty Cleaner for tile and acid resistant stone, masonry and grout
- Removes dirt and rust
- Renews the look of the surface
- Water-based, acidic formula
- No VOC - Better indoor air quality
- Countertops
- Backsplashes
- Floors
- Walls

### PACKAGING

- Available in 1 L unit (Concentrate)

## STONETECH® STONE & TILE CLEANER

### FLOOR & STONE CARE



STONETECH® Stone & Tile Cleaner is formulated to remove tough everyday spills, dirt and grease on natural stone, tile, masonry, and grout. This stone & tile cleaner is unlike other household cleaners that are highly acidic and abrasive and can damage your valuable surfaces.

#### FEATURES/USES

- Daily Stone & Tile Cleaner - cleans everyday messes
- Neutral pH formula - gently cleans without degrading natural stone, tile and grout
- Leaves a clean fresh scent
- Better indoor air quality
- Countertops
- Backsplashes
- Floors
- Walls
- Interior and exterior

#### PACKAGING

- Available in 1 L unit (Concentrate)

## STONETECH® ENHANCER PRO SEALER

### FLOOR & STONE CARE



STONETECH® Enhancer Pro™ Sealer is the color enhancing, penetrating sealer that provides maximum color & stain protection on natural stone, masonry and grout. It deepens the natural rich color of porous surfaces without altering the finish and penetrates deep to protect it from staining.

#### FEATURES/USES

- |  |                         |
|--|-------------------------|
| ▪ Deepens color of porous natural stone, masonry and grout | resistant               |
| ▪ Maximum stain protection - no gloss                      | ▪ Solvent-based formula |
| ▪ For interior and exterior use                            | ▪ Professional grade    |
| ▪ Weather & UV   | ▪ Countertops           |
|  | ▪ Backsplashes          |
|  | ▪ Floors                |
|  | ▪ Walls                 |

#### PACKAGING

- Available in 1 L unit

#### APPROXIMATE COVERAGE

- Up to 22.1 m<sup>2</sup> /1 L for a single coat application.



## STONETECH® BULLETPROOF® SEALER

### FLOOR & STONE CARE



STONETECH® BulletProof® Sealer is a water-based penetrating sealer that provides maximum stain while preserving the natural look of the surface. It can be used as a grout sealer, tile sealer, masonry sealer and in many other applications. This premium sealer offers the best protection on the most porous natural stone, tile, masonry and grout surfaces in interior and exterior applications.

#### FEATURES/USES

- Offers maximum stain protection
- Continuously inhibits the growth of bacteria, mold and mildew on the sealed surface.
- Best sealer for the most porous natural stone, tile, masonry & grout
- Preserves the original look of the surface and is breathable
- Water-based formula - Better for you and the environment
- Low odor, non-flammable and weather resistant - For interior and exterior use
- Professional grade
- Countertops
- Backsplashes
- Floors
- Walls

#### PACKAGING

- Available in 1 L unit

#### APPROXIMATE COVERAGE

- Up to 22.1 m<sup>2</sup> /1 L for a single coat application.

## STONETECH® HEAVY DUTY SEALER

### FLOOR & STONE CARE



STONETECH® Heavy Duty sealer is a water-based penetrating sealer that provides advanced stain and antimicrobial product protection, while preserving the natural look of the surface. It protects against oil and water-based stains on natural stone, tile, masonry, and grout in interior and exterior applications. It's great for use as a granite sealer, tile sealer and more.

#### FEATURES/USES

- Offers advanced stain protection
- Preserves the original look of the surface and is breathable
- Water-based formula - Better for you and the environment
- Low odor, non-flammable and weather resistant - For interior and exterior use
- Professional grade
- Countertops
- Backsplashes
- Floors
- Walls

#### PACKAGING

- Available in 1 L unit

#### APPROXIMATE COVERAGE

- Up to 22.1 m<sup>2</sup> /1 L for a single coat application.

## STONETECH® HEAVY DUTY EXTERIOR SEALER

### FLOOR & STONE CARE



STONETECH® Heavy Duty Exterior Sealer is a solvent based, penetrating sealer which offers advanced stain protection and weather resistance on natural stone, masonry and grout surfaces. Designed specifically to meet the challenges of exterior applications, STONETECH® Heavy Duty Exterior Sealer minimizes efflorescence and repels water.

#### FEATURES/USES

- Protects natural stone, masonry and grout
- Minimizes efflorescence and repels water
- Provides weather resistance
- Solvent-based formula
- For exterior use
- Countertops
- Backsplashes
- Floors
- Walls
- Walkways
- Patios

#### PACKAGING


- Available in 1 L unit

#### APPROXIMATE COVERAGE

- Up to 24.65 m<sup>2</sup> /1 L depending on porosity of stone

## STONETECH® IMPREGNATOR PRO SEALER

### FLOOR & STONE CARE

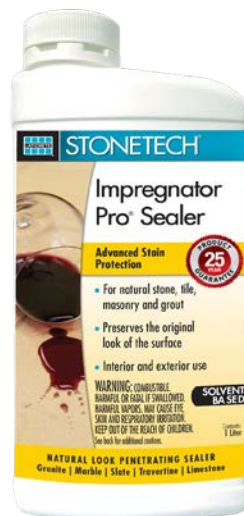

STONETECH® Impregnator Pro Sealer is a solvent based, penetrating sealer that provides advanced stain protection on natural stone, tile, masonry and grout surfaces. It blocks out oil and water based stains by impregnating into the surface without changing the original look or finish. Effective in interior and exterior application

#### FEATURES/USES

- Offers advanced stain protection
- Protects natural stone, tile, masonry and grout
- Preserves the original look of the surface
- Solvent-based formula
- For interior and exterior use
- Professional grade
- Countertops
- Backsplashes
- Floors
- Walls

#### PACKAGING

- Available in 1 L unit


#### APPROXIMATE COVERAGE

- Up to 24.6 m<sup>2</sup> /1 L depending on porosity of stone

# LATICRETE PHILADELPHIA

# LATICRETE PHILADELPHIA

**LATICRETE®** is a worldwide manufacturer of tile and stone installation systems. The company was founded in 1956 by Dr. Henry M. Rothberg and Lillian R. Rothberg. With a tile setting background and a chemical engineering degree, Dr. Rothberg was determined to bring improvements to centuries old portland cement based tile and stone installation products. Dr. Rothberg's work in this area is the basis for all modern tile and stone adhesives.



Dr. Henry M. Rothberg & Family



For over 69 years, **LATICRETE®** has provided the technology, products and experience to make innovative, permanent installations and repairs for the construction market. Architecturally specified and professionally endorsed by installers, **LATICRETE®** offers a dedication to quality that results in globally proven solutions for virtually every application. By heavily reinvesting our earnings into continuous research, customer support, and improving our manufacturing capabilities, we continue to build long term value despite fluctuations in construction activity and evolving market needs.



LATICRETE International, Inc. Bethany, Connecticut, USA



# PHILIPPINES, INC.

# PHILIPPINES, INC.

The commitment of our owners to provide robust client service is unwavering and reflected throughout our organization. In addition to developing products which support GREEN efforts, **LATICRETE®** offers a wide array of certified low VOC (Volatile Organic Compounds) installation materials, independently tested and certified by the GREENGUARD Environmental Institute, contributing to LEED certification.

With approximately 650 associates worldwide, **LATICRETE®** operates 7 plants in the United States, as well as facilities in UAE, China, India, Singapore, Australia, Norway, Italy, Costa Rica to name a few, and now, the first manufacturing plant in Santa Maria, Bulacan is ready to cater the diverse market in the Philippines.

**LATICRETE® Philippines, Inc.** was formed on March 2015 with the primary purpose of continuing and extending the manufacturing and marketing of globally proven construction solution products that can help address different construction challenges here in the Philippines.

The company is established with following principles in mind: To efficiently utilize our country's limited local resources in the manufacturing of products; To ensure that our products are developed with quality for long-lasting use to minimize waste and impact on local resources and the environment; To ensure the effective use of materials and cut down on the consumption of water and energy resources.



LATICRETE Philippines, Inc. Santa Maria, Bulacan, Philippines





# PROJECT HIGHLIGHTS

PROJECT NAME	LOCATION	LATICRETE PRODUCTS USED
Arya Residences	Taguig City	LATICRETE Unsanded Grout 1600, LATICRETE Flexible Tile Adhesive 335, LATICRETE Latex Additive 4237 + LATICRETE Crete Filler Powder 211
Ascott Residences	Taguig City	LATICRETE Thinset 317, LATICRETE 1600 Unsanded Grout, LATICRETE 282 Mortar Admix
Aspire Tower	Quezon City	LATICRETE Thinset 316, LATICRETE Unsanded Grout 1600
BDO Tower	Mandaluyong City	LATICRETE Unsanded Grout 1600, LATICRETE Flexible Tile Adhesive 325
City of Dreams	Paranaque City	LATICRETE Flexible Tile Adhesive 335, LATICRETE Latex Additive 4237 + LATICRETE Crete Filler Powder 211, LATICRETE Hydro Ban, LATAPOXY 300 Adhesive, SPECTRALOCK Pro Grout
Discovery Primea	Makati City	LATICRETE Flexible Tile Adhesive 335, LATAPOXY 310, LATICRETE 1600 Unsanded Grout
East Gallery Tower One	BGC, Taguig City	LATICRETE 317 Floor & Wall Thin Set Mortar, LATICRETE 282 Mortar Admix
Estancia Mall	Estancia Mall	LATICRETE Flexible Tile Adhesive 335, LATICRETE Unsanded Grout 1600
Greenbelt Mall	Makati City	LATICRETE Latex Additive 4237+LATICRETE Crete Filler Powder 211, LATICRETE 1600 Unsanded Grout
Marco Polo Ortigas Hotel	Pasig City	LATICRETE Premium Tile Adhesive 325, LATICRETE Latex Additive 4237+LATICRETE Crete Filler Powder 211, SPECTRALOCK Pro Grout
Marriot Grand Ballroom	Pasay City	Latex Additive 4237 + LATICRETE Crete Filler Powder 211, LATICRETE Unsanded Grout 1600
Marriot West Wing	Pasay City	LATICRETE Flexible Tile Adhesive 325, LATICRETE Unsanded Grout 1600
Okada	Paranaque City	LATICRETE 335 LATICRETE Latex Additive 4237 + LATICRETE Crete Filler Powder 211, LATICRETE Unsanded Grout 1600, LATICRETE Flexible Tile Adhesive 325, SPECTRALOCK Pro Grout
One Shangri-La Place Mall	Mandaluyong City	LATICRETE Unsanded Grout 1600, LATICRETE Latex Additive Rapid Set 4237 + LATICRETE Crete Filler Powder 211
Solaire Resort & Casino Phase 1	Paranaque City	LATICRETE 335 LATICRETE Latex Additive 4237 + LATICRETE Crete Filler Powder 211, LATICRETE Unsanded Grout 1600
Solaire Resort & Casino Phase 1A	Paranaque City	LATICRETE Flexible Tile Adhesive 335, LATICRETE Latex Additive 4237 + LATICRETE Crete Filler Powder 211, LATICRETE Hydro Barrier, SPECTRALOCK Pro Grout, LATICRETE 317 Floor and Wall Thinset, LATICRETE Unsanded Grout 1600
Conrad Manila	Pasay City	LATICRETE Unsanded Grout 1600, LATICRETE Flexible Tile Adhesive 335, LATICRETE 282 Mortar Admix
The Rise	Makati City	LATICRETE 317 Mortar, LATICRETE Latex Additive 4237 + LATICRETE 211 Crete Filler Powder, SPECTRALOCK Pro Grout, LATICRETE 1600 Unsanded Grout
Twin Oaks Place Tower 1	Mandaluyong City	LATICRETE Thinset 317, LATICRETE Unsanded Grout 1600, LATICRETE Mortar Admix 282
Zuellig	Makati City	LATICRETE 325, LATICRETE Unsanded Grout 1600
Ramon Magsaysay Center	Manila City	LATICRETE 4237 Latex Additive



Ramon Magsaysay Center, Manila City



Solaire Resort, Parañaque City



City of Dreams Manila, Parañaque City



Greenbelt Mall, Makati City



Marco Polo, Pasig City



Ascott Bonifacio Global City, Taguig City



Okada Manila, Parañaque City



Marriott Grand Ballroom, Pasay City



Conrad Manila, Pasay City

Disclaimer: LATICRETE® claims no credit for any images used on this catalog unless otherwise noted.



## NOTES

[illegible]

## NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

## Corporate Headquarters:

LATICRETE International, Inc.

One LATICRETE Park North  
Bethany, CT 06524-3423  
USA

1.800.243.4788

+1.203.393.0010

www.laticrete.com

Africa: +27.078.343.4029

Asia Pacific: +852.2526.6660

Australia: +61.7.3865.1599

China: +86.21.5789.3300

Europe: +44.871.284.5959

India: +91.40.3041.3100

Latin America: +1.203.393.0010

Middle East: +971.7.244.6396

South East Asia: + 65.6515.3028

Mexico: +52.81.8348.51 21

UK: +44.151.486.6101

## LATICRETE REPRESENTATIVE:

## CONTACT DETAILS:

## EMAIL:

Marina Bay Sands, Singapore



## LATICRETE PHILIPPINES, INC.

Lot 9A, Manggahan Industrial Park, Brgy. Manggahan, Sta. Maria, Bulacan 3022  
▪ (02) 8656 6118 ▪ ph.laticrete.com ▪ info@laticrete.ph

© 2025 LATICRETE Philippines, Inc.

All trademarks shown are the intellectual properties of their respective owners.

Disclaimer: LATICRETE® claims no credit for any images used on this catalog unless otherwise noted.

@laticretephilippines

@laticreteph

@LaticretePh

@laticreteph

@laticreteph

Laticrete Philippines

@laticretephilippinesinc