




For the Builders  
of a Better World™

## Admix and Primer

Admix and Primer is a latex primer for use with Self-Levelling products. Product is for interior use only.

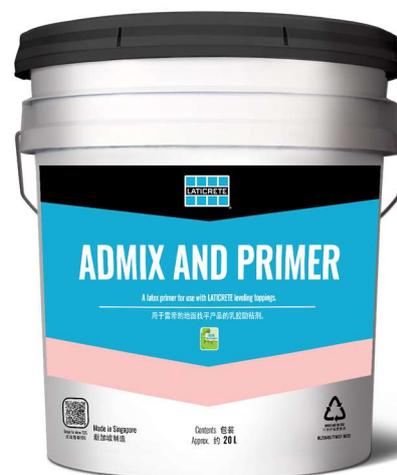

### FEATURES/BENEFITS

- Easy to use
- Reduces pinholes
- Allows for proper hydration of self leveling underlayment & overlayment
- Increases bond strength

### USES

A re-emulsifiable bonding agent designed to be used with Self Leveling Underlayment and Overlayment.

### MANUFACTURER/ DISTRIBUTED BY

LATICRETE South East Asia Pte Ltd  
No. 38 Sungei Kadut Street 2 (Level 2, A3) Singapore 729245  
Telephone: +65 6515 3028 Fax: +65 6515 3037  
Internet: [se.laticrete.com](http://se.laticrete.com)

### STANDARDS/CERTIFICATIONS

Meets all Federal, State & Local requirements for VOC. Actual field performance will depend on installation methods and site conditions.

## Suitable Substrates

For interior use only

- Concrete
- Cement Backer Board\*
- Cement Terrazzo\*\*
- Exterior Glue Plywood
- Ceramic Tile and Stone
- Cement Mortar Beds\*

\* Consult cement backer board manufacturer for specific installation recommendations and to verify acceptability for exterior use.

## Packaging

20ℓ /pail, 32 pails per pallet.

## Approximate Coverage

20ℓ of Admix and Primer yields approximately 160m<sup>2</sup> per coat.

## Shelf Life

Factory sealed containers of this product are guaranteed to be of first quality for one (1) year if stored at temperatures  $\geq 0^{\circ}\text{C}$  and  $\leq 40^{\circ}\text{C}$ .

## Limitations

- Interior Use Only
- Do not install when surface temperature is below 5°C or when ambient temperature is expected to be below 10°C during placement or before material takes final set.
- Adhesives/mastics, mortars and grouts for ceramic tile, pavers, brick and stone are not replacements for waterproofing membranes. When a waterproofing membrane is required, use HYDRO BAN.

## Cautions

Consult MSDS for more information

- During cold weather, protect finished work from traffic until fully cured.
- Keep out of reach of children.

## INSTALLATION SYSTEM

### Surface Preparation

All surfaces should be between 5°C and 40°C structurally sound, clean and free of all dirt, oil, grease, loose peeling paint, concrete sealers or curing compounds. Remove all dust by vacuuming. Skim coat existing ceramic tile or stone with a Latex Thin-Set mortar.

### Application

Instructions for use as a primer for self-leveling applications: Use Admix and Primer with every application. Shake thoroughly before using. Pour, mop, or spray primer onto the surface. Apply an even thickness to the prepared substrate using a bristle broom. Make sure to work into the substrate, removing any puddles or thick areas. Allow the primer to dry to a clear film (~30 to 45mins depending on the site conditions) before application of underlayment. Very dry or porous slabs will require double priming if diluted with water.

## Cleaning

Clean tools with water while primer is fresh.

## AVAILABILITY AND COST

### Availability

LATICRETE and LATAPOXY materials are available worldwide. For distributor information, call:

**Telephone:** (65) 6515-3028

**Fax:** (65) 6515-3037

For on-line distributor information, visit LATICRETE at [se.laticrete.com](http://se.laticrete.com)

### Cost

Contact a LATICRETE Distributor in your area.

## WARRANTY

LATICRETE South East Asia Pte Ltd warrants that Admix and Primer is free from manufacturing defects and will not break down, deteriorate or disintegrate under normal usage for a period of one (1) year from date of purchase subject to the terms and conditions stated.

## TECHNICAL SERVICES/ CONTACT

### Technical Assistance

Information is available by calling:

LATICRETE South East Asia Pte Ltd  
No. 38 Sungei Kadut Street 2

(Level 2, A3)

Singapore 729245

Telephone: (65) 6515-3028

Fax: (65) 6515-3037

Email: [enquiry@laticrete.com.sg](mailto:enquiry@laticrete.com.sg)

### Technical and safety literature

To acquire technical and safety literature, please visit our website at [se.laticrete.com](http://se.laticrete.com)

### Disclaimer

LATICRETE is not responsible for product use beyond its intended application. Liability is limited to replacing defective materials. We are not responsible for any loss or damage resulting from improper use. Product specifications are subject to change without notice. For the most up-to-date information, please visit our website at [se.laticrete.com](http://se.laticrete.com).