





LEVEL-C20

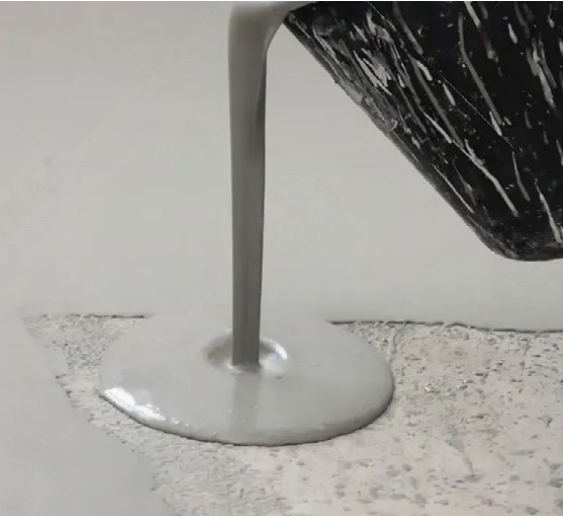


LEVEL C-20 SELF-LEVELING UNDERLAYMENT

A cement-based easy-to-use, self-leveling underlayment designed for use over various substrates including concrete and ceramic tile. LEVEL C20 provides a smooth and flat surface on which finished floor goods can be installed, and it can be placed from 3 - 10 mm in a single lift.

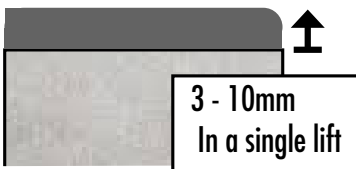

INORGANIC
Will not contribute to mold/mildew growth



Pourable / pumpable

Applicable Standard :
EN13892-2 | ASTM C307



Suitable Substrates (Interior Only)

- Concrete
- Vinyl Tile
- Cement Terrazzo
- Exterior Glue Plywood
- Ceramic Tile and Stone
- Cement Mortar Beds

Uses

- Levelling of concrete substrate
- Provide smooth flat substrate for finished goods

Packaging

- 20kg bag; 72 bags per pallet

Coverage*

- Approximately it will cover 1.5 Kg / Sqm. per millimeter of thickness

* Coverage provided is approximate and is for estimation. Actual coverage depends on the job-site conditions, application methods, wastages, etc Refer to the Data-Sheet / Consult Technical Services for detailed information

LATICRETE MIDDLE EAST LLC | GLOBALLY PROVEN CONSTRUCTION SOLUTIONS

P.O Box 86028, Ras Al Khaimah, UAE. | Toll Free 800 5632 (Within UAE) | www.laticrete.me | Tel. : +971 7 244 6396 , | Tel. : +971 4 331 9972 | KSA : +966 50 961 947 8 | Email: enquiry@laticrete.me
© 2022 LATICRETE International, Inc. All trademarks shown are the intellectual properties of their respective owner
SS-LC20-0922

